



# Inspiro LED

Linear suspended Updown light LED luminaire




### Specifications:

- Grey powder coated finish extruded aluminium housing.
- PC diffuser.
- 50% up & 50 % downward light distribution
- low power, high efficacy long life LEDs.
- Excellent heat dissipation through direct contact
- LED driver duly wired up to terminal block.
- Luminaires are suitable for stand alone and continuous row installation.
- Provision for loop in loop out for ease of wiring.

### Accessories:

- In-built electronic LED driver
- Complete with LEDs and drivers pre-wired up to terminal block to connect in coming power
- 3way 10Amps GFP mains connector

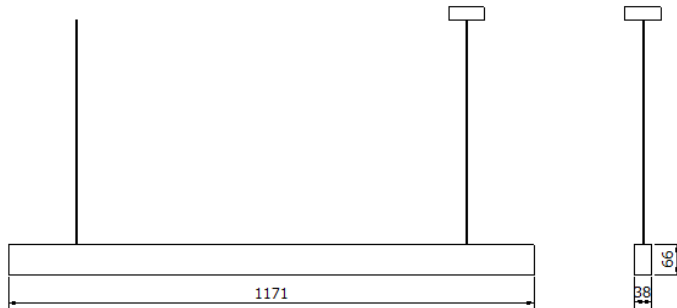

All dimension are in +/-2mm.

### Electrical data:

IP20

Main Code.	System Wattage (W)	Rated Voltage (V)	Mains Current (A)	Approx Weight (Kg)	Case Lot (in no's)
LM41-481-XXX-40-XX	40	240	0.17	3.2	8

### Customer Benefits:

- Updown light/ Indirect direct LED lighting
- Uniform light Distribution / end to end connectivity
- Maintenance friendly, bottom openable diffuser and driver assembly
- High luminaire efficiency
- Suitable for Green Buildings