


# Orbit Ring

Orbit Ring LED light suitable for suspended application

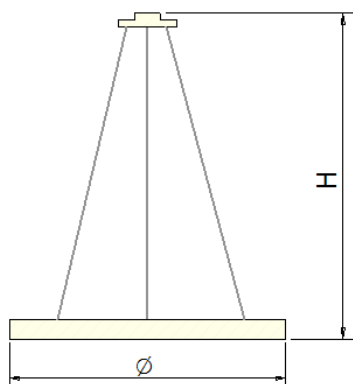

## SPECIFICATIONS

- Housing made up of extruded Aluminum powder coated in White(RAL9003)/Black(RAL9005)
- High efficiency, non-yellowing PMMA diffuser
- Specially designed, easy to install with mounting Suspension wire 1 meter
- Easy to mount on a true ceiling and quick to service
- Complete with LEDs, Driver and accessories pre-wired up to terminal block
- Designed and manufactured to comply with IS 10322 part5/section 1 1987

## INSTALLATION

Suitable for indoor suspended application.

## CONTROL GEAR

- Electronic LED driver.

## Dimensional Details

Parameter	40W	50W
Height	1200mm	1200mm
Dia	600mm	800mm

## Electrical Data:

IP20

Sr No.	Cat No.	Rated Voltage (V)	System Wattage (W)	Current (Amp)	Case Lot (in nos)
1.	LM53-511-XXX-40-BL	240	40W	0.17	1
2.	LM53-511-XXX-40-WH	240	40W	0.17	1
3.	LM53-661-XXX-40-BL	240	50W	0.21	1
4.	LM53-661-XXX-40-WH	240	50W	0.21	1

## Customer Benefits:

- Aesthetic slim profile for contemporary interiors
- Technology edge with high efficiency LEDs
- Maintenance free long service life
- Eco friendly solution with zero mercury content