



Lighting solutions  
for safe and  
vibrant outdoors



Nightlife has never been more vibrant than it is now. Modern lifestyle has impacted our schedules stretching them way into midnight. We see crowded public spaces, busy streets and significant human activities even after sunset. Illuminating streets, pathways, lanes, building exteriors, gardens, and walkways has become the key focus area for city planners in order to maintain safety and security.

**Wipro Lighting provides a vast range of luminaires with special features particularly designed to meet wide ranging lighting needs. Precision optical design and uniform light distribution in street lights enhance safety on roads, while the variety in beam angles, wattages and light distribution patterns in floodlights makes the city look vibrant even at night.**



SkylineLED



AlphaLED Floodlight



AlphaLED Floodlight



UrbanoLED Pathway



UrbanoLED Pathway




FantasyLED Bollard



### Contemporary Design

Compact and aesthetic design of outdoor luminaires blends well with the urban architecture and landscapes making the outdoors even more lively.



### High Efficiency

Best-in-class and long life LEDs with good LED driver results in upto 65% energy savings.



### Long Life

Better thermal management results in sturdy performance of the luminaire that gives a maintenance free and long service life.




### Rugged Construction


Aluminium die-cast housing with IP65/IP66 construction enhances durability and reliability.




## DIMENSION DRAWINGS

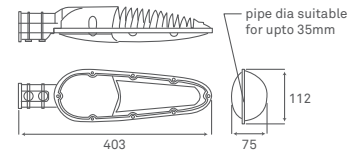


20 W, 25W & 30W

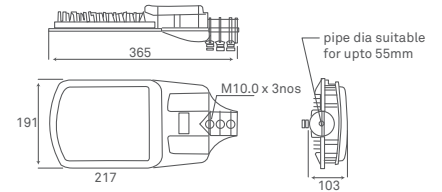


35W, 40W & 45W

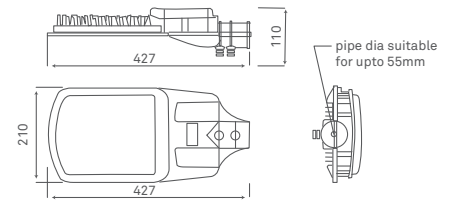


60W, 70W, 80W, 90W & 100W

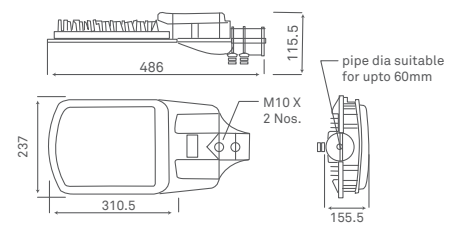

110W & 120W

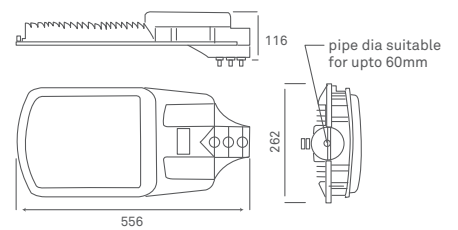

150W, 180W

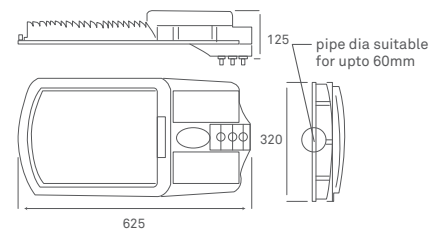

200W, 220W & 250W

All dimensions are in mm. Tolerance  $\pm 2$ mm

# SkylineLED | LR02

High performance IP66 LED streetlight suitable for primary and secondary roads.



20W, 25W, 30W



35W, 40W, 45W



60W, 70W, 80W, 90W, 100W



110W, 120W, 150W, 180W



200W, 220W & 250W

## SPECIFICATIONS

- Aluminium pressure die-cast housing for long life
- Pure polyester powder coated dark grey housing
- High efficiency, long life LEDs
- High purity PC fresnel diffuser with silicon gaskets (20W, 25W & 30W) and highly efficient specially designed lens optics with toughened glass
- IP66 protection (35W and above wattages)
- Complete assembly with LEDs, driver and accessories pre-wired up to terminal block
- Driver cover designed to suit top maintenance (35W and above wattages)

## INSTALLATION

- Suitable for external pole dia. up to 35mm (20W, 25W & 30W)
- Suitable for external pole dia. 55mm - (35W-100W) | 60mm - (110W - 250W),
- 3 way 10 Amp connector provided for quick connections

## CONTROL GEAR

In-built integrated electronic LED driver

## APPLICATIONS

(20W-45W)



(60W and above)



## ELECTRICAL DATA

**IP66**








CAT. NO.	POWER (W)	RATED VOLTAGE (V)	MAINS CURRENT (A)	CASE LOT (IN NOS.)
LR02-261-XXX-57-XX	20*	240	0.09	08
LR02-291-XXX-57-XX	25*	240	0.11	08
LR02-331-XXX-57-XX	30*	240	0.13	08
LR02-391-XXX-57-XX	35	240	0.15	02
LR02-451-XXX-57-XX	40	240	0.18	02
LR02-501-XXX-57-XX	45	240	0.20	02
LR02-671-XXX-57-G2	60	240	0.26	01
LR02-781-XXX-57-G2	70	240	0.31	01
LR02-981-XXX-57-G2	80	240	0.35	01
LR02-102-XXX-57-G2	90	240	0.39	01
LR02-112-XXX-57-G2	100	240	0.44	01
LR02-122-XXX-57-G2	110	240	0.48	01
LR02-132-XXX-57-G2	120	240	0.53	01
LR02-182-XXX-57-G2	150	240	0.66	01
LR02-212-XXX-57-G2	180	240	0.79	01
LR02-242-XXX-57-G2	200	240	0.88	01
LR02-262-XXX-57-G2	220	240	0.96	01
LR02-292-XXX-57-G2	250	240	1.09	01

LED is an ever improving and evolving technology. Wipro is committed to bring you the best in LED technology. Data given is representative and can change.

\*20W, 25W & 30W Skyline LED is IP65.



## DIMENSION DRAWINGS

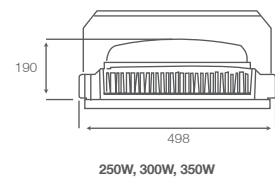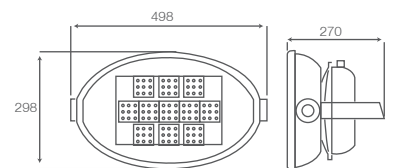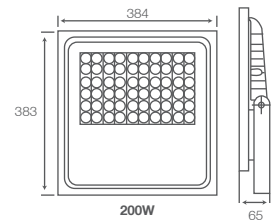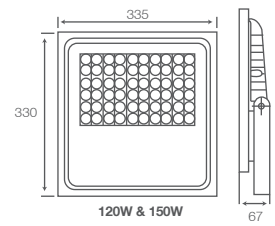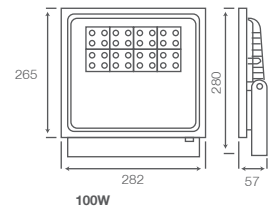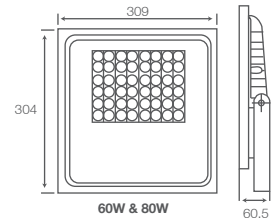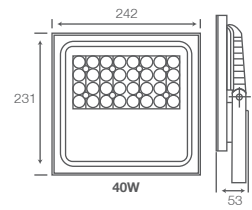

All dimensions are in mm. Tolerance  $\pm 2$  mm.

# AlphaLED | LF19 & LF20

High performance LED floodlight



40W, 60W, 80W



100W, 120W, 150W, 200W



250W, 300W, 350W

## SPECIFICATIONS

- Aluminium die-cast housing and frame, powder coated
- High efficiency, long life, LEDs
- Unique reflector system ensures good light distribution
- Toughened glass with silicon gaskets for IP66 protection
- Complete assembly with LED, driver and accessories pre-wired up to terminal block in connector compartment with PG7 cable gland
- Integral control gear compartment with connector
- In-built integrated electronic LED driver

## INSTALLATION

- External cradle adjustable mounting arrangement suitable for mounting with 2 nos. M8 or 5/16" bolts

## APPLICATIONS

(40W, 60W, 80W, 100W, 120W, 150W)



(200W, 250W, 300W, 350W)



## ELECTRICAL DATA

**IP66**

Product Code	System Wattage (W +/-5%)	Rated Voltage (V)	Mains Current (A)	Case Lot (in nos.)
LF19-471-060-57-XX	40	240	0.70	01
LF19-711-060-57-XX	60	240	1.05	01
LF19-931-060-57-XX	80	240	1.85	01
LF20-122-060-57-G2	100	240	0.43	01
LF20-132-060-57-G2	120	240	0.53	01
LF20-192-060-57-G2	150	240	0.69	01
LF20-272-060-57-G2	200	240	0.88	01
LF20-342-060-57-G2	250	240	1.15	01
LF20-392-060-57-G2	300	240	1.35	01
LF20-442-060-57-G2	350	240	1.50	01

LED is an ever improving and evolving technology. Wipro is committed to bring you the best in LED technology. Data given is representative and can change.





# UrbanoLED Pathway | LP05 & LP06

Best-in-class LED pathway



LP05

## SPECIFICATIONS

- High-pressure die-cast aluminium alloy body and components
- Luminaire anti-ageing electrostatic spray processed, super resistance to corrosion
- Polycarbonate cover, high strength impact resistance
- Conforms to IS 10322 Part 5 / Sec 1: 1987


## INSTALLATION

- Pole mounting

## ACCESSORIES

- Pole to be ordered separately
- Pole dia 60-76mm

## DIMENSION DRAWINGS



All dimensions are in mm. Tolerance  $\pm 2$  mm.

## APPLICATIONS



LP06

## SPECIFICATIONS

- High pressure die-cast aluminium alloy body
- High efficiency, long life, LEDs
- Lenses for superior performance
- Toughened glass cover with IP66 protection


## INSTALLATION

- Pole mounting

## ACCESSORIES

- Pole to be ordered separately
- Pole dia 60-76mm

## DIMENSION DRAWINGS



All dimensions are in mm. Tolerance  $\pm 2$  mm.

## APPLICATIONS



## ELECTRICAL DATA

**IP66**

Product Code	System Wattage (W +/-5%)	Rated Voltage (V)	Mains Current (A)	Case Lot (in nos.)
LP05-711-XXX-65-XX	60	240	0.26	01
LP06-351-XXX-57-XX	35	240	0.15	01

LED is an ever improving and evolving technology. Wipro is committed to bring you the best in LED technology. Data given is representative and can change.



## Post Top LED | LP02

Aesthetically appealing post top




### SPECIFICATIONS

- Die cast Aluminum housing in Pure Polyester UV resistant powder coated grey finish
- Top maintainable product with top opening die cast cover installation
- Luminaire is suitable for pole diameter of 65-75 mm (Pole is not in Wipro's scope)
- Cable entry through pole from bottom.
- In-built electronic LED driver
- 2 way 10Amps GFP mains connector
- Anti-corrosive stainless steel screws & silicon gasket
- HET PMMA diffuser
- IP65 Protection
- Driver duly wired up to terminal block
- Conforms to IS 10322 Part 5 / Sec 1:1987

### INSTALLATION

- Luminaire is suitable for pole diameter of 65-75 mm (Pole to be ordered separately)
- Cable entry through pole from bottom
- n-built electronic LED driver
- 2 way 10Amps GFP mains connector

### DIMENSION DRAWINGS



All dimensions are in mm. Tolerance  $\pm 2$ mm

### APPLICATIONS



### ELECTRICAL DATA

**IP65**

Product Code	System Wattage	Rated Voltage (V)	Mains Current (A)	Case Lot (in nos.)
LP02-501-XXX-57-XX	45	240	0.2	01

## FantasyLED Bollard | CRLA11

Suitable for landscape lighting




### SPECIFICATIONS

- MS housing 2mm wall thickness & black matt powder coated
- Special translucent PMMA milky tube for better light transmission
- High Luminous flux imported LEDs for better light output
- Product is designed for IP65 protection
- Electronic control gear duly wired up to the terminal block
- Designed and manufactured to comply with IS 10322 part 5/Sec 1:1987

### INSTALLATION

Designed for installation by fixing the base on a solid flat surface using rawl plugs or cemented fastening screws

### DIMENSION DRAWINGS



All dimensions are in mm. Tolerance  $\pm 2$ mm

### APPLICATIONS



### ELECTRICAL DATA

**IP65**

Product Code	System Wattage	Rated Voltage (V)	Mains Current (A)	Case Lot (in nos.)
CRLA11008HP57-08	8	240	0.037	01
CRLA11008HP57-05	8	240	0.037	01

## WIPRO LIGHTING LEDEGE

Get the Edge with LED Lighting Solutions for outdoors through:

- Eco-sustainability, Design & innovation, Green technology and Efficient lighting solutions
- Capability to service multi-locational accounts
- Service Commitment - 19 branches and over 350 dedicated stockists
- Ease of contact through website
- Trustworthiness and reliability of Wipro



Scan the QR code  
to download the app



**New Delhi:** 011-4170 8121/29, **Mumbai:** 022-6218 2000, **Chennai:** 95660 86333, **Bangalore:** 080-4150 3260,  
**Kolkata:** 033-4404 5886/87, **Pune:** 020-2553 5081, **Hyderabad:** 040-2717 6082, **Chandigarh:** 0172-2661 355/5018 734,  
**Jaipur:** 0141-2280 014/4910 879, **Lucknow:** 0522-2434 352, **Baroda:** 0265-2395 830/35/36/41/45,  
**Ahmedabad:** 079-4007 3546, **Indore (MP):** 98279 99668, **Raipur (CG):** 0771-3265 725, **Bhubaneswar:** 0674-6450 804,  
**Coimbatore:** 98947 95836, **Nagpur:** 0712-2569 878, **Vishakhapatnam:** 96769 08080, **Cochin:** 98957 08464.

### Business Office

Wipro Lighting, 5th floor, Godrej Eternia - C,  
old Pune-Mumbai highway, Shivajinagar, Pune 411 005. India.

(T) 020-66098700, (F) 020-66098777  
helpdesk.lighting@wipro.com

### Registered Office

Wipro Enterprises (P) Limited  
'C' Block, CCLG Division, Doddakannelli, Sarjapur Road,  
Bangalore - 560035, India.

Innovation and Improvement are a way of life at Wipro.  
All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.

[www.wiprolighting.com](http://www.wiprolighting.com)

Toll-free no: 1800-425-1969

Follow us on    

