


Opus LED is elegant, fluidic & modern design with unique floating spherical diffuser and surrounding light chamber subtly introduces a circular geometry into the ceiling plane for visual interest. It has excellent uniform light distribution in all directions with direct & indirect lighting



Product Dimensions

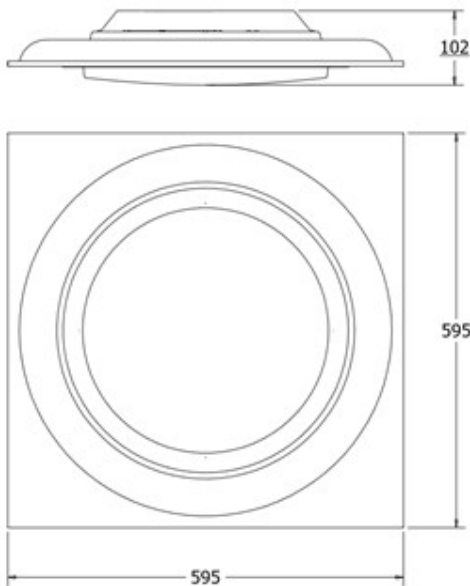

All dimensions are in mm +/- 2mm

Features /Specifications

Benefits


<ul style="list-style-type: none"> High efficiency transmission PMMA diffuser. 	Uniform illuminations. No bright spots
<ul style="list-style-type: none"> White color powder coated CRCA deep drawn housing 	Excellent heat dissipation. Light weight & rust free. Color matching with ceiling
<ul style="list-style-type: none"> PoE 	Compatible with POE system 802.3at/bt std
<ul style="list-style-type: none"> High efficacy LEDs 	Uniform and optimum light output Ideal Green Lighting Solution
<ul style="list-style-type: none"> IP20 	Protection against dust, insects and small items entry into luminaire for safety
<ul style="list-style-type: none"> IS 10322 part 5/Sec 1 2012 comply 	Comply for general purpose lighting

Installation & Accessories

- Designed for installation with four nos. of Steel hook-up wire.
- Suitable for Armstrong / CRG /TRAC / USG/Celotex modular ceiling system.
- For Gypsum /POP applications additional Frame (Part No: 9180P01089) needs to be ordered separately.

Applications

Ideal for Modern work spaces work area / office spaces, meeting rooms.

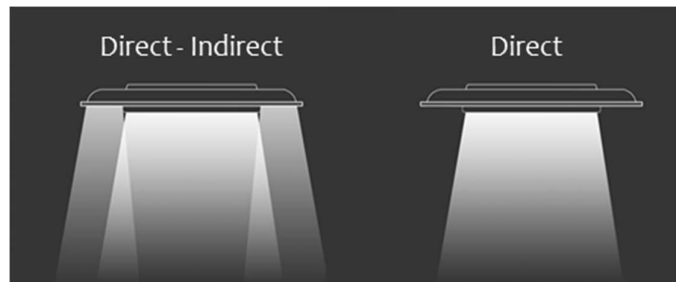

LM38-461

LM38-361

Product Code	LED Wattage	Rated Voltage (V DC)	Case Lot (Nos)	Approx Unit Weight (kg)
LM38-361-PG2-57-XX	24W	24-48	2	3
LM38-361-PG2-40-XX	24W	24-48	2	3
LM38-461-PG2-57-XX	29W	24-48	2	3.6
LM38-461-PG2-40-XX	29W	24-48	2	3.6