


# Orbit suspended POE

LED Orbit light suitable for suspended application

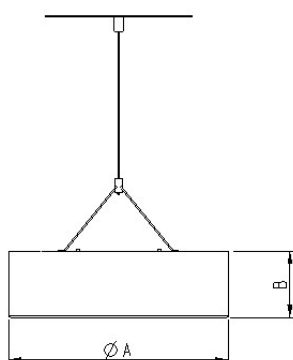

All dimensions are in mm  
Tolerance +/-2mm

IP-20

## Specifications

- Housing made of CRCA 0.6mm thk and white matt powder coated.
- Cover made of CRCA 0.8mm thk and white matt powder coated.
- PCB mtg plate made of CRCA 0.6mm thk and white matt powder coated.
- High Efficiency Translucence (HET) diffuser  
For better light transmission
- Suspension system made of steel wire of 2mm dia and accessories are chrome plated. Easy to mount on true ceiling and quick to service
- Compatible with POE system 802.3at/bt std Designed and manufactured to comply with IS 10322 part 5/Sec 1 2012


## Installation

- Suitable for indoor suspended application.

Cat. No.	Dimn "A"	Dimn "B"	LED Wattage	Rated voltage (vdc)	Case Lot (nos)	Approx. Unit Weight (kg)
LM71-441-PG2-57-G1	500	100	26	24-48	1	2.8
LM71-441-PG2-40-G1	500	100	26	24-48	1	2.8
LM71-341-PG2-57-G1	300	90	20	24-48	1	1.8
LM71-341-PG2-40-G1	300	90	20	24-48	1	1.8

# Orbit surface mounted POE

LED Orbit light suitable for surface mounted application

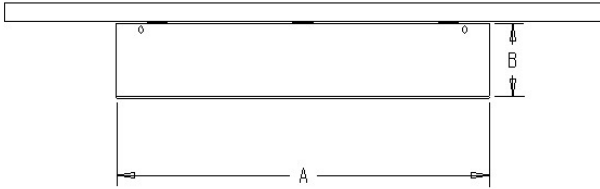



All dimensions are in mm  
Tolerance +/-2mm

IP-20

Cat. No.	Dimn "A"	Dimn "B"	LED Wattage	Rated voltage (vdc)	Case Lot (nos)	Approx Unit Weight (kg)
LM71-441-PG257SMG1	500	100	26	24-48	1	2.8
LM71-441-PG257SMG1	500	100	26	24-48	1	2.8
LM71-341-PG257SMG1	300	90	20	24-48	1	1.8
LM71-341-PG240SMG1	300	90	20	24-48	1	1.8

# Orbit recess mounted POE

LED Orbit light suitable for recess mounted application

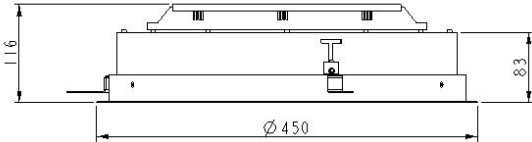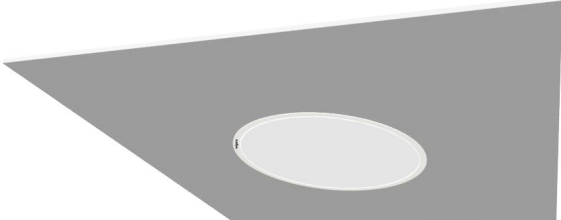

All dimensions are in mm  
Tolerance +/-2mm

IP-20

Cat. No.	Dimn "A"	Dimn "B"	LED Wattage	Rated voltage (vdc)	Case Lot (nos)	Approx Unit Weight (kg)
LM71441PG245057RG1	450	116	26	24-48	1	2.8
LM71441PG245040RG1	450	116	26	24-48	1	2.8