



Recess mounted Slim LED Linear light suitable for Techzone ceiling

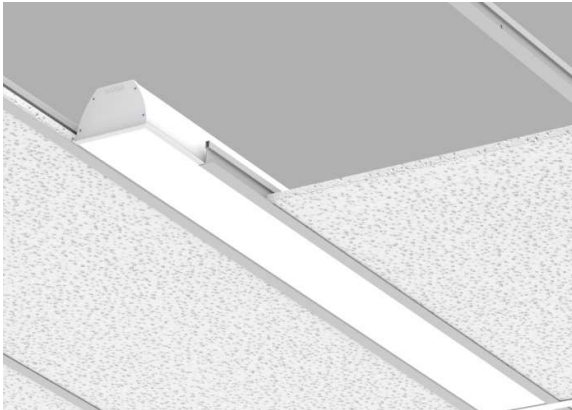


Features /Specifications	Benefits
<ul style="list-style-type: none"> Extruded pure white powder coated Aluminium Housing with die cast end Cap 	<ul style="list-style-type: none"> Light weight with clean fit and finish Long life, no rusting
<ul style="list-style-type: none"> Special translucent satin finish PMMA diffuser. 	<ul style="list-style-type: none"> Uniform light Distribution without glare
<ul style="list-style-type: none"> Suitable for stand-alone and continuous row installation 	<ul style="list-style-type: none"> Seamless linear lighting Easy Installation and long service life
<ul style="list-style-type: none"> PoE 	<ul style="list-style-type: none"> Compatible with POE system 802.3at/bt std
<ul style="list-style-type: none"> Down lighting with High efficacy LEDs 	<ul style="list-style-type: none"> Uniform and optimum light output Ideal Green Lighting Solution
<ul style="list-style-type: none"> IS 10322 part 5/Sec 1 2012 comply 	<ul style="list-style-type: none"> Comply for general purpose lighting
<ul style="list-style-type: none"> IP20 	<ul style="list-style-type: none"> Protection against insects and small items entry into luminaries for safety.

Product Dimensions & Mounting Details				
Cat no	Dim A	Dim B	Dim C	Dim D
LM35-381-PG2-57-G1	1195	1179	880	NA
LM35-761-PG2-57-G1	2395	2379	2080	NA
LM35-381-PG2-57-CT	1185	1175	880	295
LM35-761-PG2-57-CT	2385	2375	2080	295

Stand-alone installation

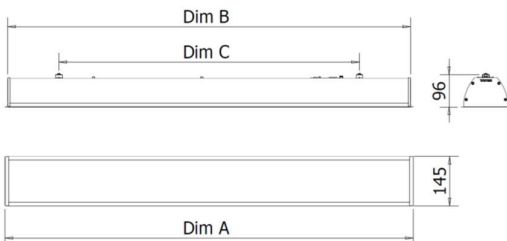

Continuous row installation

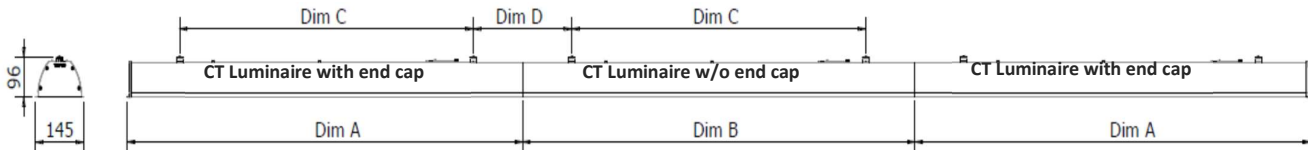

All dimensions are in mm +/- 2mm

Installation & Accessories

- Suitable for ARMSTRONG TECHZONE ceiling

Applications:

Ideal for Modern work spaces work area / office spaces.

Electrical Data

Product Code	LED Wattage	DC Voltage (VDC)	Case Lot (Nos)	Approx. Unit Weight (kg)
LM35-381-PG2-57-G1	24W	24-48	2	3.8
LM35-381-PG2-57-CT	24W	24-48	2	3.8
LM35-761-PG2-57-G1	49W	24-48	1	7.8
LM35-761-PG2-57-CT	49W	24-48	1	7.8