

All dimensions are in mm. Tolerance  $\pm 2$  mm

### Specifications:

- White powder coated finish extruded aluminium housing
- Special translucent satin finish colourLED PMMA diffuser.
- 33% up & 66 % downward light distribution
- low power, high efficacy long life LEDs.
- Excellent heat dissipation through direct contact
- Luminaries are suitable for stand alone and continuous row installation.
- Provision for loop in loop out for ease of wiring.
- Conforms to IS 10322 part 5/ Sec 1 2012.
- PoE-Product compatible with PoE system/smart engine

### Accessories:

- Complete with LEDs pre-wired up to terminal block to connect in coming power
- 3way 10Amps GFP mains connector

### Installation:

Suspension system with quick onsite adjustment :

- LMX 341 suitable for installation on RCC ceiling
- LMX 342 suitable for installation on modular grid prelude 24 mm ceiling system
- LMX 343 suitable for installation on modular grid silhouette 15 mm ceiling system

### Electrical data:

**IP20**


Main Code.	System Wattage (W) $\pm 2W$	Rated Voltage (V)	Mains Current (A)	Approx Weight (Kg)	Case Lot (in no's)
LM34-511-XXX-40-RW	36	240	0.16	3.6	1

### Customer Benefits:


- Updown light/ Indirect direct LED lighting
- Uniform light Distribution / end to end connectivity
- Maintenance friendly, bottom openable diffuser and driver assembly
- High luminaire efficiency
- Suitable for Green Buildings

In case of end to end installation of Axeon

**02 Nos in a row :**

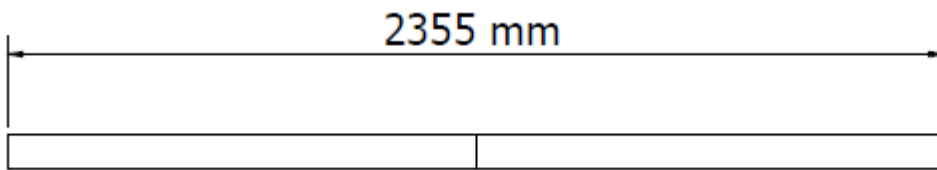

**04 Nos in a row :**

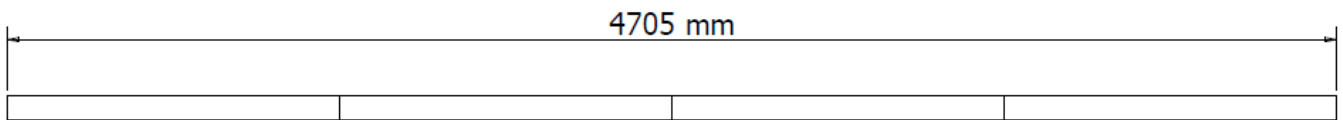

**05 Nos in a row :**

