

# Immaculate ultra PM up/down




LED 1x4 light suitable for suspended direct-indirect application



### Specifications

- Housing made of extruded aluminum and white Powder coated finish.
- High Luminous Flux imported LEDs for better Light output.
- Specially developed light guide panel to Transmit light 50% up and 50% down.
- Easy to mount with suspension kit and quick to service
- Designed and manufactured to comply with IS 10322 part 5/Sec 1 2012
- PoE-Product compatible with PoE system/smart engine

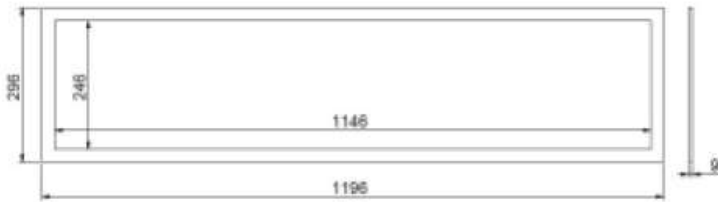

### Installation

- Suitable for suspended application

\* All dimensions are in mm  
Tolerance +/- 2mm

### Electrical Data :

IP20

Cat. No.	System wattage (W) ±2W	Rated Voltage (V)	Mains current (Amp)	Case Lot (nos)	Unit Weight (kg)
LM82-871-XXX-40-XX	56W	240	0.26	5	10