


LM30-401-XXX-40-RW




Slim Linear LED luminaire

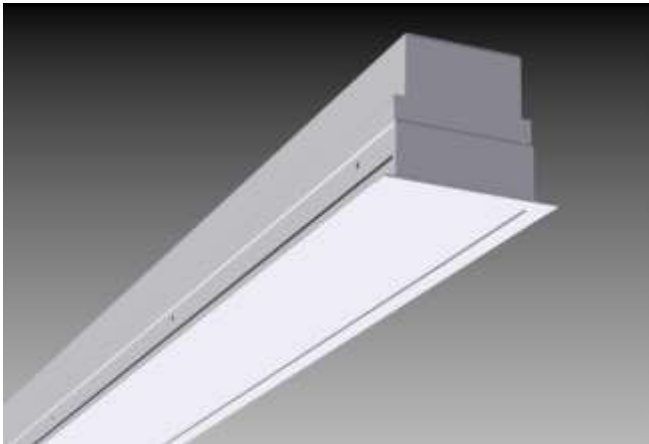

Specifications

- White powder coated finish CRCA Housing with extruded aluminum lip
- Special translucent satin finish virgin PMMA diffuser
- Designed and manufactured to comply with IS 10322 part 5/Sec 1 2012
- PoE-Product compatible with PoE system/smart engine

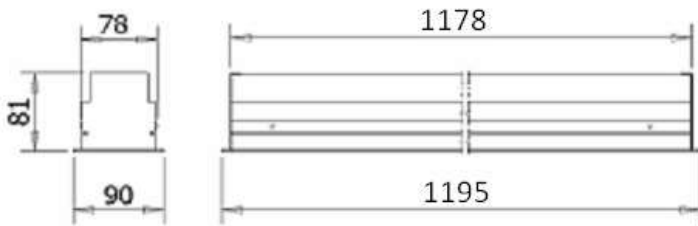

Installation

- Specially designed mounting brackets suitable for 10 to 30 mm thick POP / GYP board ceiling system

* All dimensions are in mm

Electrical Data :

IP20

Cat. No.	System wattage (W) $\pm 2W$	Rated Voltage (V)	Mains current (Amp)	Case Lot (nos)
LM30-401-XXX-40-RW	28 W	240	0.12	2