

VISION LED

Recess Mounted LED Bottom Opening Cleanroom Luminaire



Specifications


- Luminaire consists of precisely manufactured, CRCA powder coated Housing, Bottom frame.
- Bottom frame is fixed with screwless designed mechanism
- Satin finish high efficiency translucence (HET) diffuser is sealed with bottom frame and non-hygroscopic VHB gasket to ensure dust proofing
- Bottom frame and diffuser, with gasket and pressure clamps, ensures dust proofing
- Wishbone mechanism for perfect bottom frame alignment and hinging
- Surface finish in epoxy polyester powder coating lends higher corrosion resistance & life long finish
- Suitable for Class 10,000 & 100,000 cleanroom applications
- Conforms to IS10322/ Part 5/ Sec. 1 : 2012
- PoE-Product compatible with PoE system/smart engine

Accessories

- Loop-in, loop-out facility to save cost of cables and switches
- Suitable for 19 mm ET cable entry

Installation

- Ceiling suspension using 19 mm OD conduit pipe using knock-outs provided on the Housing

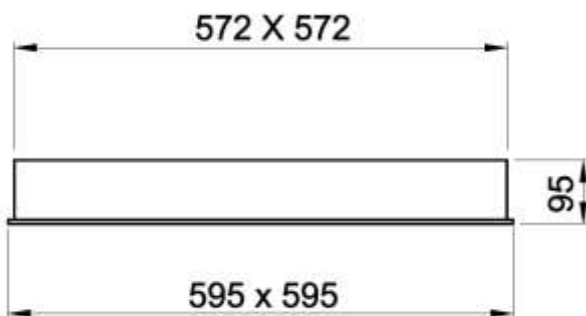

All dimensions are in mm. Tolerance ± 2 mm

Electrical data

IP54

Cat No.	System Wattage (W) ± 2 W	Rated Voltage (V)	Mains Current (A)	Case Lot (in no's)
LC20-511-XXX-40-RW	36	240	0.16	2
LC20-511-XXX-57-RW	36	240	0.16	2