

# Halo Plus

Uniquely Profiled Surface/ Suspended Downlighter

Creating ambience  
with a difference



## What makes Halo Plus different?



### Aesthetics :

- Compact and trendy design
- Deep inset diffuser to maintain low UGR
- Tapered profile housing with micro texture powder coating
- Aesthetically integrated suspension and power cable in suspended version



### Performance:

- Best in class LED with efficacy upto 100 Lm/W and THD<10%



### Choice:

- Option available in color: Matte Black & White
- Mounting options: Surface & Suspended

Unique product on aesthetics and performance, ideal for enriching ambience in open ceiling work spaces.

Part of inSync™ range offering human centric lighting.

\*12W / 15W only

**IoL**™  
Internet of Lighting

# Halo Plus

Uniquely Profiled Surface/ Suspended Downlighter


## Specifications

- HET PMMA diffusers provide high transmittivity
- Tapered design blends well with the architecture
- CRCA powder coated housing, available in both black and white colour options
- In compliance to IS 10322 part 5/ Sec1 1987

## Installation

Ideal for surface / suspended mounted application.  
1.5 meter suspension cable is provided along with the product.

## Dimensions Drawing

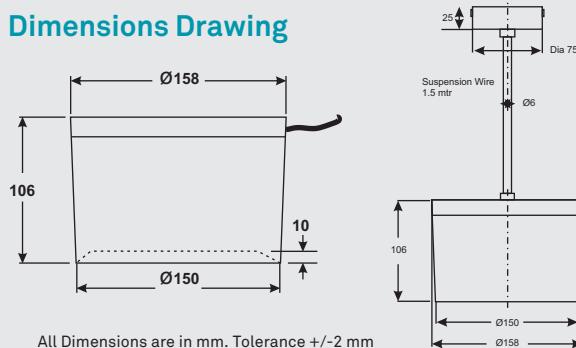

## Electrical Data

IP20

Catalogue No.	Power (W) ±10%	Rated Voltage (VAC)	Input current (Amp)	Case Lot (In No's)
LD99-151-XXX57SMWH	12	240	0.052	12
LD99-151-XXX40SMWH	12	240	0.052	12
LD99-211-XXX57SMWH	15	240	0.065	12
LD99-211-XXX40SMWH	15	240	0.065	12
LD99-281-XXX57SMWH	18	240	0.080	12
LD99-281-XXX40SMWH	18	240	0.080	12
LD99-151-XXX57SMBL	12	240	0.052	12
LD99-151-XXX40SMBL	12	240	0.052	12
LD99-211-XXX57SMBL	15	240	0.065	12
LD99-211-XXX40SMBL	15	240	0.065	12
LD99-281-XXX57SMBL	18	240	0.080	12
LD99-281-XXX40SMBL	18	240	0.080	12
LD99-151-XXX57PMWH	12	240	0.052	12
LD99-151-XXX40PMWH	12	240	0.052	12
LD99-211-XXX57PMWH	15	240	0.065	12
LD99-211-XXX40PMWH	15	240	0.065	12
LD99-281-XXX57PMWH	18	240	0.080	12
LD99-281-XXX40PMWH	18	240	0.080	12
LD99-151-XXX57PMBL	12	240	0.052	12
LD99-151-XXX40PMBL	12	240	0.052	12
LD99-211-XXX57PMBL	15	240	0.065	12
LD99-211-XXX40PMBL	15	240	0.065	12
LD99-281-XXX57PMBL	18	240	0.080	12
LD99-281-XXX40PMBL	18	240	0.080	12

40 - Stands for 4000K

57 - Stands for 5700K

PM - Stands for Pendent mounted

WH - Stands for White housing


BL - Stands for Black housing

SM - Surface mounted

Also available in DALI/ Analog and white color tunable



## Applications



### Business Office:

Wipro Lighting, 5th floor, Godrej Eternia - C, Old Pune-Mumbai Highway, Shivajinagar, Pune - 411 005, India.  
Tel.: 020-6609 8700  
Fax: 020-6609 8777  
E-mail: helpdesk.lighting@wipro.com

### Registered Office:

Wipro Enterprises (P) Limited, 'C' Block, CCLG Division, Doddakannelli, Sarjapur Road, Bangalore 560 035, India.

**Toll-Free No.: 1800-425-1969**

[www.wiprolighting.com](http://www.wiprolighting.com)

Follow us on