

Utopia

Elevating life, every night





A glowing yellow sphere with a leaf pattern, set against a background of a brick path and trees at night.

A new era of outdoor lighting

Imagine landscapes bathed in elegance, where every luminaire complements nature, not competes with it. Wipro's Landscape Range - Utopia is more than just a collection; it's a movement - lighting that enhances beauty while preserving the world around us.

Preserving Dark Sky

Less pollution, brighter nights

Utopia is more than just lighting - it's a commitment to preserving the night sky. Designed to minimize uplight and reduce light pollution, it ensures illumination stays where it's needed, keeping cities vibrant while letting the stars shine as they should.

International Dark Sky Association

sets the standard for sustainable lighting by



Minimizing amount of illumination



Minimizing area of illumination



Minimizing duration of illumination



Using longer light wavelength lights with warm color temperature



Restore human health

Avoids light trespass through windows

Conserves energy

Improves overall efficiency & performance

Revives ecosystems

Ensures a secure habitat for wildlife & migrating birds

Protects our dark skies

Minimises skyglow and glare



Did you
know

Over **83%** of the world lives under
light-polluted skies

Increased light intensity
confuses migratory birds

Higher light levels
waste 60-70% energy

Uncontrolled lighting
hides the stars

Artificial light increases the
risk of health issues

INNOVATION FOR HUMAN SPACES

It's more than lighting – it's a responsibility.

At Wipro Lighting, we believe lighting should support life, not disrupt it. That's why we have developed Dark Sky-compliant solutions that minimize light pollution, reduce glare, and prioritize human and ecological well-being. We design environments that are restful, respectful, and responsible - supporting sleep cycles, preserving night skies, and protecting biodiversity.

**Aesthetic designs made
for beautiful memories...**

**Ecologically sensitive,
reducing light misuse...**

**Spaces made safe and secure
for the people.**

Lighting moments that matter

Whether it's stargazing or storytelling,
our landscape lighting creates spaces
where connections deepen and
memories shine brighter.



Smart solutions

Powered by IoT, Utopia adapts in real time - tracking movement, adjusting brightness, and optimizing performance. From enhancing comfort to maximizing efficiency, it transforms every space into a dynamic, responsive environment.



Available
Technologies:



Powerline
communication



Aesthetics powered by innovative technology

Engineered with precision and aesthetics brilliance. Utopia range ensures minimal glare, reduce sky glow and uniform illumination that combines sleek style with unparalleled performance.



OptiVance™



Reduced glare



Symmetric



Asymmetric



High efficiency LED



Sustainable



OptiVance™

An Inhouse Designed Advanced Optics.

Our Optic Technology OptiVance™ Photometry lens offers asymmetrical and symmetrical light distribution with high efficacy. It ensures maximum uniform lighting and maximizes the distance between the two luminaires. This enables architects to design landscapes with minimal visual distraction, energy savings, and increased uniform light. It provides homogeneous lighting with optimal spillover. From modern workspaces to cozy residential spaces, our luminaire's innovative design also reduces glare, making it ideal for a wide range of applications.

An Advance OptiVance™ Photometry with Symmetric and Asymmetric distribution.

Symmetric Lens to
light-up all sides evenly





Symmetric

Asymmetric Lens to
precise light control



Asymmetric

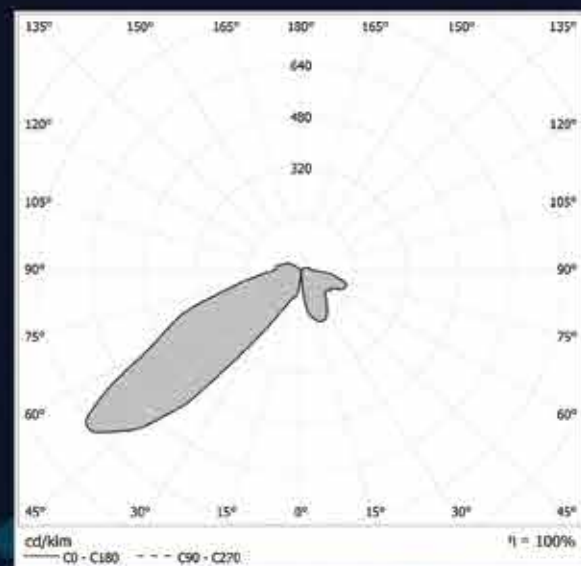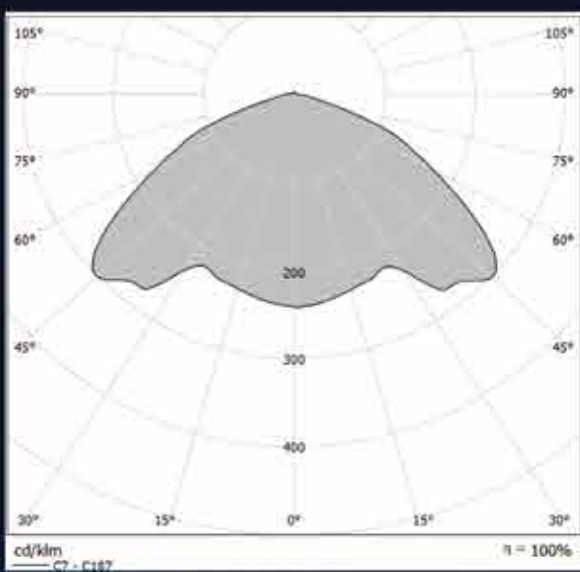

55° Peak Intensity with high efficacy of up to 135 lm/W.

Pathways, gardens, grand avenues - lighting that is
crafted to enhance, protect, and transform.
A seamless blend of design and function,
illuminating the outdoors with elegance and purpose.



Post top

- Zion 19
- Arcadia 25
- Celestea 31
- Elysia 37
- Tekto 43



Column lights

- Tuscan 87

- Amethyst 59
- Vista 63
- Verve 67
- Aegis 71
- Urbano 75
- Bliss 79



Bollards

- Nyx 95
- Elevate 101
- Whistling Oyster 107
- Whistling J bollard 113

- Strix 121
- Quad 125
- Ulix 129
- Oyster 133

- J bollard 137
- Fantasy 141
- Fantasy Nxt 145
- Crest 149
- Acorn 153

Creating stories with every glow

Wipro's exceptional landscape luminaires transform outdoor spaces by enhancing safety, beauty, and functionality.





With Utopia, discover a diverse range
where every luminaire tells a unique story.





zion

Illumination that transcends time

Zion blends advanced technology with a design that's been trusted for generations, promising a reliable glow. Its timeless elegance enhances outdoor spaces, providing unmatched safety and performance.



Clear diffuser

allows maximum light
and create even illumination

Wider light distribution

with technically advanced
polycarbonate clear diffuser

Energy savings

with high efficacy
and advanced LED

Effective heat dissipation

with die-cast aluminium housing
with a grey polyester finish

Long life LEDs

with metal clad PCBs

Zion is an amalgamation of simplicity and grandeur at its level best. This elegant pathway lighting is sure to add the touch of eternal persona to your surrounding.



Specifications



IK07



3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 120 lm/W




Symmetric



Asymmetric

Product Dimensions

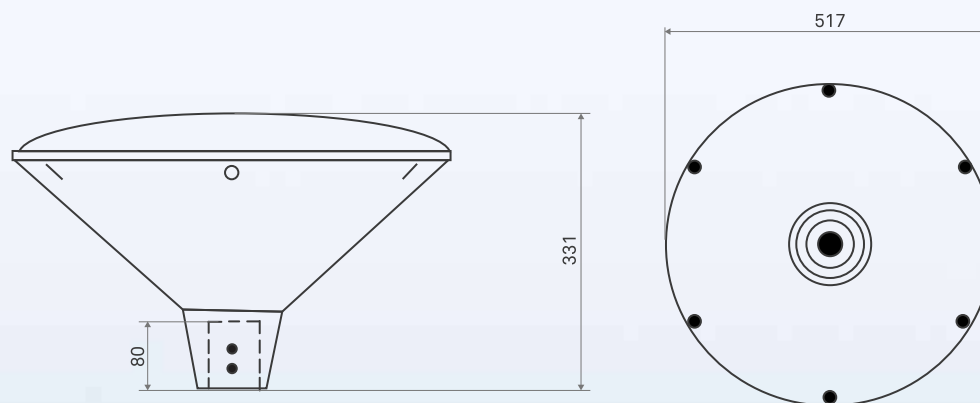

*All dimensions are within +/- 5mm tolerance

Electrical Data

Product Code	Power (W) $\pm 10\%$	Rate Voltage (VAC)	Main Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP15-461-SYM-30-XX	30	240	0.13	5.0	1
LP15-461-SYM-40-XX	30	240	0.13	5.0	1
LP15-461-SYM-57-XX	30	240	0.13	5.0	1
LP15-931-SYM-30-XX	60	240	0.25	6.0	1
LP15-931-SYM-40-XX	60	240	0.25	6.0	1
LP15-931-SYM-57-XX	60	240	0.25	6.0	1
LP15-152-SYM-30-XX	100	240	0.42	5.6	1
LP15-152-SYM-40-XX	100	240	0.42	5.6	1
LP15-152-SYM-57-XX	100	240	0.42	5.6	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 60mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- For Asymmetric option replace SYM with ASM
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



arcadia

Advanced lighting for modern spaces



A luminaire inspired by the future of urban illumination, Arcadia breaks the monotony with its unique goose-neck shape. It captures the essence of nighttime lighting, using sleek design and technology to light up modern outdoor spaces.

Enhanced energy savings
with advanced high-efficacy LEDs

Wider light distribution
through an advanced clear polycarbonate diffuser

Durable LEDs
with metal clad circuit boards

Optional heat dissipation
with die-cast aluminium housing with a grey polyester finish

Superior light dispersion
through an advanced clear polycarbonate diffuser

Nil-up light
which prevent light pollution, minimise skyglow and improve visibility of the night sky

wipro



The guardian of eternal beauty, Arcadia, stands tall with all its ethereal appeal providing a safe and well lit surrounding. Its various distribution options amplifies our philosophy of 'Right Light'.



Specifications



IK07



2700K, 3000K, 4000K, 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 120 lm/W

arcadia




Symmetric



Asymmetric

Product Dimensions

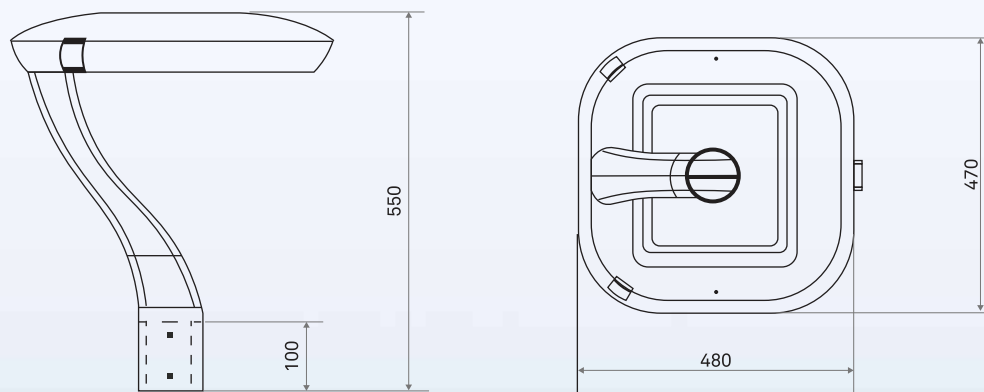

*All dimensions are in mm, +/-5mm tolerance

Electrical Data

Product Code	Power (W) ±10%	Rate Voltage (VAC)	Main Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP16-461-SYM-30-XX	30	240	0.13	8.0	1
LP16-461-SYM-40-XX	30	240	0.13	8.0	1
LP16-461-SYM-57-XX	30	240	0.13	8.0	1
LP16-931-SYM-30-XX	60	240	0.25	9.0	1
LP16-931-SYM-40-XX	60	240	0.25	9.0	1
LP16-931-SYM-57-XX	60	240	0.25	9.0	1
LP16-152-SYM-30-XX	100	240	0.42	8.2	1
LP16-152-SYM-40-XX	100	240	0.42	8.2	1
LP16-152-SYM-57-XX	100	240	0.42	8.2	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 60mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- For Asymmetric option replace SYM with ASM
- Options of 2700K, 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



celestea

Recreating the starlit night



With its elegant circular design and clear diffuser, Celestea illuminates with LEDs that replicate the starry night effect. It channels the mystical essence of the night sky highlighting the surroundings in their natural beauty.



Nil-up light

which prevent light pollution, minimise skyglow and improve visibility of the night sky

Long-lasting LEDs
with metal clad PCBs

Thermal regulation

with a grey polyester-coated die-cast aluminium housing

Optimal energy savings

with superior efficacy and cutting-edge LEDs

Wider light distribution

through an advanced clear polycarbonate diffuser

Celestea embodies the heavenly stars within itself, providing a soothing illumination around it. Its almost nil uplight ensures lowest light spillage providing visual comfort and low glare to its neighboring surroundings.



Specifications



IK07



2700K, 3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 70




Efficacy up to 120 lm/W

celestea



Symmetric

Product Dimensions

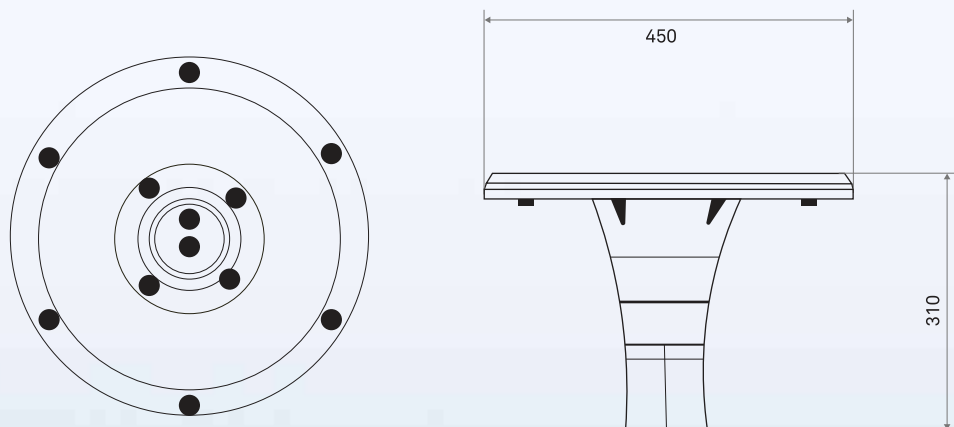

*All dimensions are within +/- 5mm tolerance

Electrical Data

Product Code	Power (W) $\pm 10\%$	Rate Voltage (VAC)	Input Current (AMP)	Approx weight (Kg ± 0.2)	Case Lot (No.s)
LP17-461-SYM-30-XX	30	240	0.13	0.13	1
LP17-461-SYM-40-XX	30	240	0.13	0.13	1
LP17-461-SYM-57-XX	30	240	0.13	0.13	1
LP17-931-SYM-30-XX	60	240	0.25	0.25	1
LP17-931-SYM-40-XX	60	240	0.25	0.25	1
LP17-931-SYM-57-XX	60	240	0.25	0.25	1
LP17-152-SYM-30-XX	100	240	0.42	0.42	1
LP17-152-SYM-40-XX	100	240	0.42	0.42	1
LP17-152-SYM-57-XX	100	240	0.42	0.42	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 60mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- Options of 2700K, 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



elysia

Serene dance of light in the night sky

Radiating the serene beauty of night-time light, Elysia imparts its gentle glow generously across outdoor landscapes, revealing every detail with humility and grace. Its design is harmonious with nature, creating a tranquil atmosphere that invites moments of reflection and peace.

Clear diffuser

allows maximum light
and create even illumination

Optimal energy savings

with superior efficacy
and cutting-edge LEDs

Long life LEDs

with on metal clad PCBs

Effective heat dissipation

with die-cast aluminium housing
with a grey polyester

Wider light distribution

with technically advanced
polycarbonate clear diffuser

wipro

Elysia, magnificence embodied...
Making your strolls heavenly,
it brings forth the North Star
in your life, guiding your walks
with calm and charm



Specifications



IK07



3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 100 lm/W




Symmetric



Asymmetric

Product Dimensions

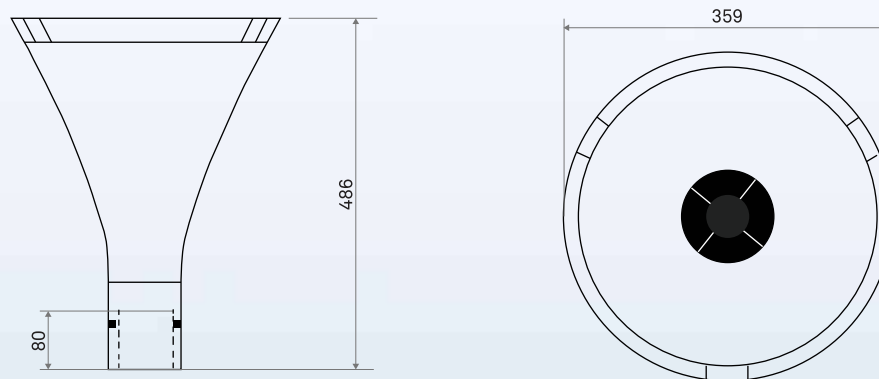

*All dimensions are within +/- 5mm tolerance

Electrical Data

Product Code	Power (W) $\pm 10\%$	Rate Voltage (VAC)	Main Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP14-461-SYM-30-XX	30	240	0.13	4.0	1
LP14-461-SYM-40-XX	30	240	0.13	4.0	1
LP14-461-SYM-57-XX	30	240	0.13	4.0	1
LP14-501-SYM-30-XX	45	240	0.20	4.0	1
LP14-501-SYM-40-XX	45	240	0.20	4.0	1
LP14-501-SYM-57-XX	45	240	0.20	4.0	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 60mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- For Asymmetric option replace SYM with ASM
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



tekto

A symphony of light under the stars

Illuminate your spaces with precision and efficiency using our OptiVance™ photometry lens designed to deliver uniform and homogeneous lighting with maximum lumen output creating a clean and refined ambiance.



Optional heat dissipation
with aluminium housing with
a grey polyester finish

Long life LEDs
with metal clad PCBs

Wider light distribution
with polycarbonate symmetric lens

Maximum lumen output
with our Optivance optics

Optivance™ advanced photometry
ensures maximum light spread
with 55° peak intensity

Crafted to endure, designed to enchant,
Tekto turns every night into a masterpiece
of light and shadow, elevating the beauty
of the outdoors with effortless grace.


IP66

Specifications



IK10



4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 120-135 lm/W





tekto

triangle

Upgrade to a lighting solution that combines sleek style with unparalleled performance. Engineered with OptiVance™ optics, Tekto ensures top-tier energy efficiency, providing optimal brightness or any setting transforming landscape into living world of art.



A nighttime photograph of an outdoor walkway illuminated by Tekto Dual Triangle lights. The lights are arranged in a line, creating a warm, golden glow. The walkway is paved with light-colored tiles, and the surrounding area is dark, with some blurred lights in the background. The overall atmosphere is serene and modern.

tekto

dual triangle

Upgrade and illuminate your outdoor spaces with Tekto Dual Triangle. Engineered with state-of-the-art OptiVance™ optics, Our LED light's innovative design also reduces glare, making it ideal for any setting transforming landscape into refined ambiance.



tekto




hexa



Step into a world where light is more than illumination - it's an experience. The Tekto Hexa stands tall as a beacon of elegance, casting a radiant glow that transforms landscapes into living works of art.



Product Dimensions

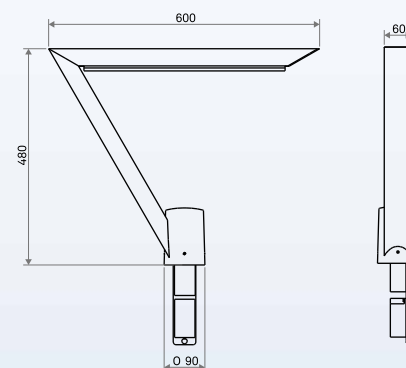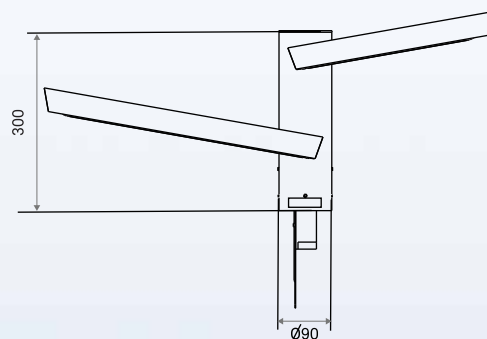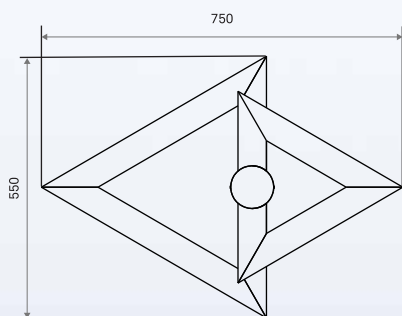

*All dimensions are in mm, +/- 5mm tolerance

*All dimensions are in mm, +/- 5mm tolerance

Electrical Data


Product Variant	Product Code	Power (W) ±10%	Rate Voltage (VAC)	Input Current (A)	Approx. weight (Kg)±0.2Kg	Case Lot (No.s)
Tekto Dual Triangle	LP19DT-931SYM57-XX	60	240	0.26	4	1
	LP19DT-931SYM40-XX	60	240	0.26	4	1
Tekto Seven	LP19-461-SYM-57-XX	30	240	0.13	2.2	1
	LP19-461-SYM-40-XX	30	240	0.13	2.2	1
	LP19-501-SYM-57-XX	45	240	0.20	2.2	1
	LP19-501-SYM-40-XX	45	240	0.20	2.2	1
	LP19-931-SYM-57-XX	60	240	0.26	2.5	1
	LP19-931-SYM-40-XX	60	240	0.26	2.5	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012



- Suitable for mounting/external pole dia O/D-Ø75mm, I/D-Ø70mm (Pole to be ordered separately)
- Replace XX suffix codes to SP for 5-year
- In Tekto Seven, replace SYM with ASM for Asymmetric option
- Options of 3000K, 4000K and 5700K CCT available
- Availability of smart and connected options




Product Dimensions

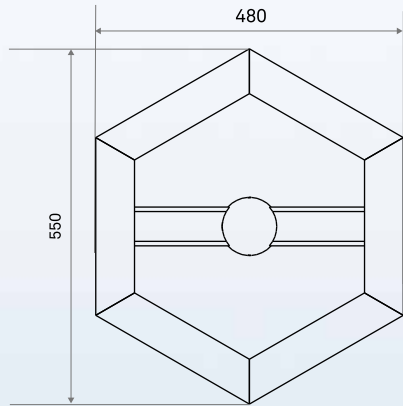

*All dimensions are in mm, +/- 5mm tolerance

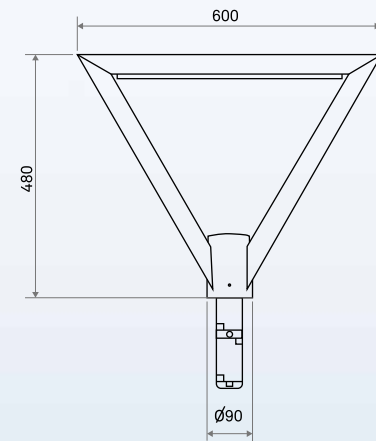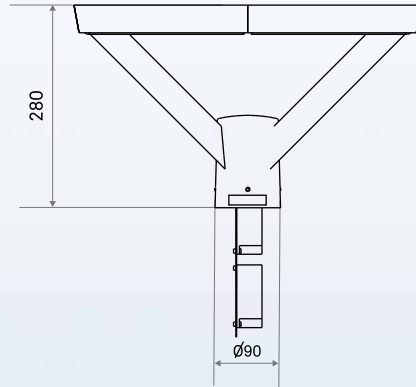

*All dimensions are within +/- 5mm tolerance



Electrical Data

Product Variant	Product Code	Power (W) ±2W	Rate Voltage (VAC)	Main Current (A) AC	Approx weight (Kg)	Case Lot (No.s)
Tekto Hexa	LP19H-461-SYM57-XX	30	240	0.13	28	1
	LP19H-501-SYM57-XX	45	240	0.20	2.8	1
	LP19H-931-SYM57-XX	60	240	0.26	3	1
Tekto Triangle	LP19T-461-SYM57-XX	30	240	0.13	2.5	1
	LP19T-501-SYM57-XX	45	240	0.20	2.5	1
	LP19T-931-SYM57-XX	60	240	0.26	2.8	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Suitable for Mounting/External pole Dia O/D-Ø75mm, I/D-Ø70m. (Pole to be ordered separately)
- Replace XX suffix codes to SP for 5-year
- For Asymmetric option replace SYM with ASM
- Options of 3000K, 4000K and 5700K CCT available
- Availability of smart and connected options



A night scene of a modern outdoor space. In the foreground, there is a wooden deck with a white railing. In the middle ground, a tall, slender light pole with two glowing spherical lights stands prominently. The background features a grassy area and a dark building with some lights. The sky is dark with a few stars visible.

Empowering every move

Thoughtfully lit environments designed to energize, support, and follow your rhythm - anytime, anywhere.



wipro

amethyst

Let the outdoors sparkle

Features & Benefits

Reduced glare

and wider light distribution with polycarbonate diffuser

Energy saving

through high-efficacy LEDs

Effective heat dissipation

with aluminium die-cast housing with polyester powder coating

Unique design

inspired by the blossomed petals of the bluebell flower

Long life LEDs

with metal clad PCBs



Specifications



IK05



4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 70 lm/W

amethyst



wiprolighting.com

Product Dimensions



Amethyst Neo

Wattage	35W, 45W, 60W
Mounting Height	1.8 – 2.5 m
Pole Diameter	Up to 76 mm
Optics	Opal

Amethyst Flora

Wattage	35W, 45W, 60W
Mounting Height	1.8 – 2.5 m
Pole Diameter	Up to 76 mm
Optics	Opal

Electrical Data

Product Code	Power (W) ±10%	Rate Voltage (VAC)	Input Current (AMP)	Approx weight (Kg ± 0.2)	Case Lot (No.s)
LP10N-431-XX-57-XX	35	240	0.15	4	1
LP10N-501-XX-57-XX	45	240	0.19	4	1
LP10N-671-XX-57-XX	60	240	0.26	4	1
LP10F-431-XX-57-XX	35	240	0.15	4.2	1
LP10F-501-XX-57-XX	45	240	0.19	4.2	1
LP10F-671-XX-57-XX	60	240	0.26	4.2	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 65mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



wipro

vista

Creating enchanting nights



Features & Benefits

Corrosion free luminaire

due to aluminium housing duly powder coated with grey pure polyester powder

Better thermal management

with metal clad PCBs

Nil-up light

which prevent light pollution, minimise skyglow and improve visibility of the night sky

Optimum light output

with highly advanced LED

High performing luminaire

with higher power factor and lower harmonic distortion

Specifications



IK07



2700K, 3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 100 lm/W




IP66

vista



Product Dimensions

Dark Sky Approved

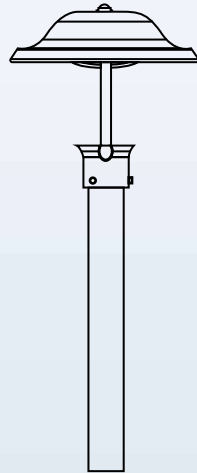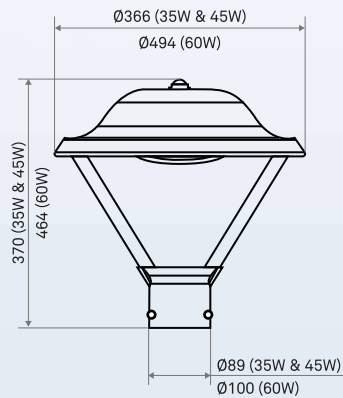

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Power (W) $\pm 10\%$	Rate Voltage (VAC)	Main Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP09-431-XXX-57-XX	35	240	0.15	2.2	1
LP09-501-XXX-57-XX	45	240	0.19	2.2	1
LP09S-431-XX-57-XX	35	240	0.15	2.2	1
LP09S-501-XX-57-XX	45	240	0.19	2.2	1
LP09B-671-XX-57-XX	60	240	0.26	4.2	1
LP09SB-671-X-57-XX	60	240	0.26	4.2	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 60mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- LP09 / LP09B – Fresnel Lens & LP09S / LP09SB – Street Optics
- Options of 2700K, 3000K, 4000K CCT available
- Availability of smart and connected options



wipro

verve

Experience versatility at every level



Features & Benefits

Durable and corrosion-resistant

due to aluminium housing coated with pure polyester powder

Superior thermal management

featuring metal-clad PCBs for efficient heat dissipation

Nil-up light

which prevent light pollution, minimise skyglow and improve visibility of the night sky

Optimal light output

equipped with highly advanced LEDs for superior illumination

High performance

with a high power factor and low harmonic distortion



Specifications



IK08



2700K, 3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 70




Efficacy up to 100 lm/W



Product Dimensions

Dark Sky Approved

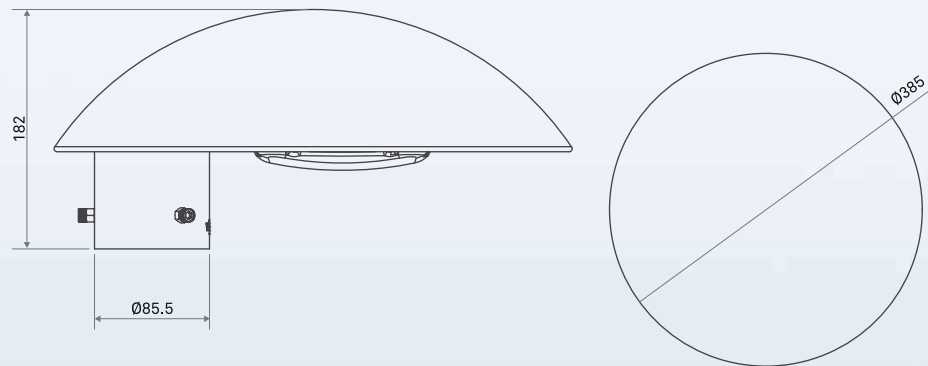

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Power (W) ±10%	Input Current (AMP)	Case Lot (No.s)
LP13-431-XXX-57-XX	35	0.15	1
LP13H-431-XX-57-XX	35	0.15	1
LP13-501-XXX-57-XX	45	0.19	1
LP13H-501-XX-57-XX	45	0.19	1
LP13S-431-XX-57-XX	35	0.15	1
LP13HS-431-X-57-XX	35	0.15	1
LP13S-501-XX-57-XX	45	0.19	1
LP13HS-501-X-57-XX	45	0.19	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 65mm to 75mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- LP13 = Fresnel lens | LP13S = Street Optics | LP13H = Cap with Hole and Fresnel lens | LP13HS = CAP with Hole and Street Optics
- Options of 2700K, 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



*a*egis

Crafting experience

wipro

Features & Benefits

Optimal heat dissipation

with die-cast aluminium housing with a grey polyester finish

Durable LEDs

with metal clad circuit boards

Wider light distribution

through an advanced clear polycarbonate diffuser

Indirect Light

ensures glare free and gentle calming illumination

Enhanced energy savings

with advanced high-efficacy LEDs



Specifications



IK06



5700K CCT



50,000 burning hours




CRI 70



Efficacy up to 50 lm/W



Product Dimensions

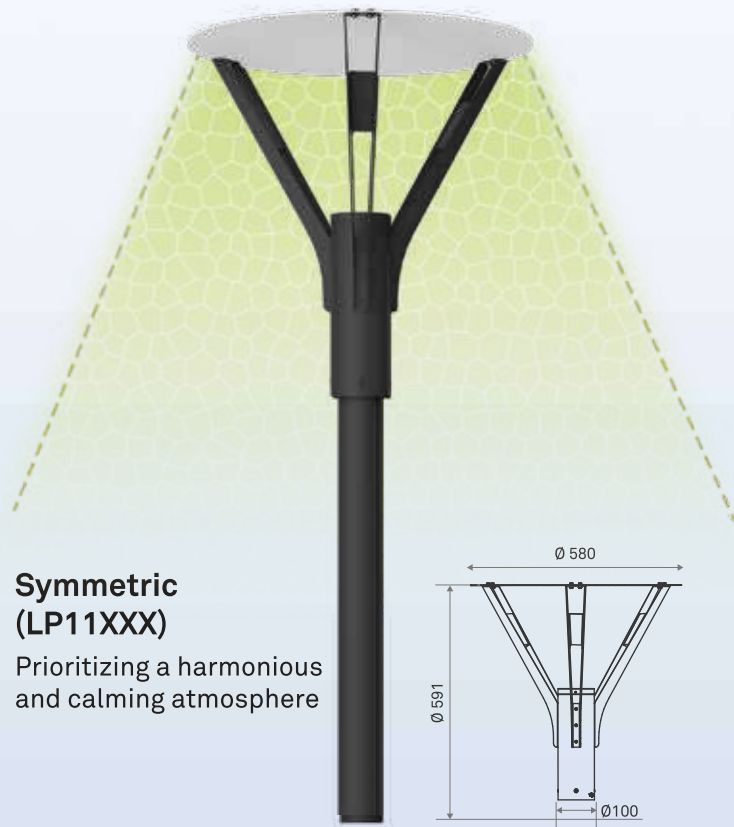

Symmetric (LP11XXX)

Prioritizing a harmonious and calming atmosphere



Asymmetric (LP11ASM)

Casts a wider unidirectional light

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Power (W) ±10%	Rate Voltage (VAC)	Main Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP11-501-XXX-57-XX	45	240	0.2	7.0	1
LP11-501-SYM-57-XX	45	240	0.2	6.9	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 65mm to 75 mm (To be ordered separately)
- Replace XX suffix codes to SP for 5-year
- For Asymmetric option replace SYM with ASM
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



wipro

urbano

Enhancing your outdoors

Features & Benefits

Specially designed fins

for excellent heat dissipation

Lightweight luminaire

due to grey color powder coated aluminium die-casted housing

Symmetric glare-free light distribution

with specially molded opal white PC diffuser

Specially designed fins

ensures less up-light and glare control with precision light distribution

Optimal light output

with high efficacy LEDs



Specifications



IK07



3000K, 4000K & 6500K CCT



50,000 burning hours



CRI 70




Efficacy up to 80 lm/W

urbano



Product Dimensions

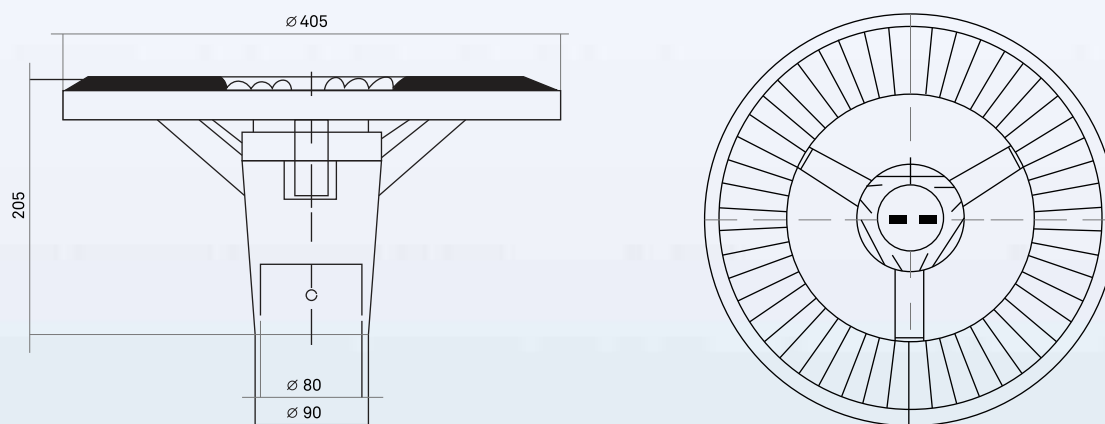

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Power (W) $\pm 10\%$	Rate Voltage (VAC)	Input Current (AMP)	Approx weight (Kg)	Case Lot (No.s)
LP05-351-XXX-30-G2	30	240	0.13	4.0	1
LP05-351-XXX-40-G2	30	240	0.13	4.0	1
LP05-351-XXX-57-G2	30	240	0.13	4.0	1
LP05-501-XXX-30-G2	45	240	0.20	4.5	1
LP05-501-XXX-40-G2	45	240	0.20	4.5	1
LP05-501-XXX-57-G2	45	240	0.20	4.5	1
LP05-711-XXX-30-G2	60	240	0.26	5.0	1
LP05-711-XXX-40-G2	60	240	0.26	5.0	1
LP05-711-XXX-57-G2	60	240	0.26	5.0	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 70mm to 75 mm (To be ordered separately)
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options



bliss

Elegance amplified

wipro

Features & Benefits

Optimal heat management

with aluminium housing in pure polyester
UV resistant powder coated black finish

Top maintainable

with top opening die-cast cover

Efficient distribution

through HET PMMA diffuser

Clear diffuser

allows maximum light and create even illumination

Anti-corrosive luminaire

stainless steel screws & silicon gasket



Specifications



IK05



5700K CCT



50,000 burning hours



CRI 70




Efficacy up to 90-95 lm/W

bliss



Product Dimensions

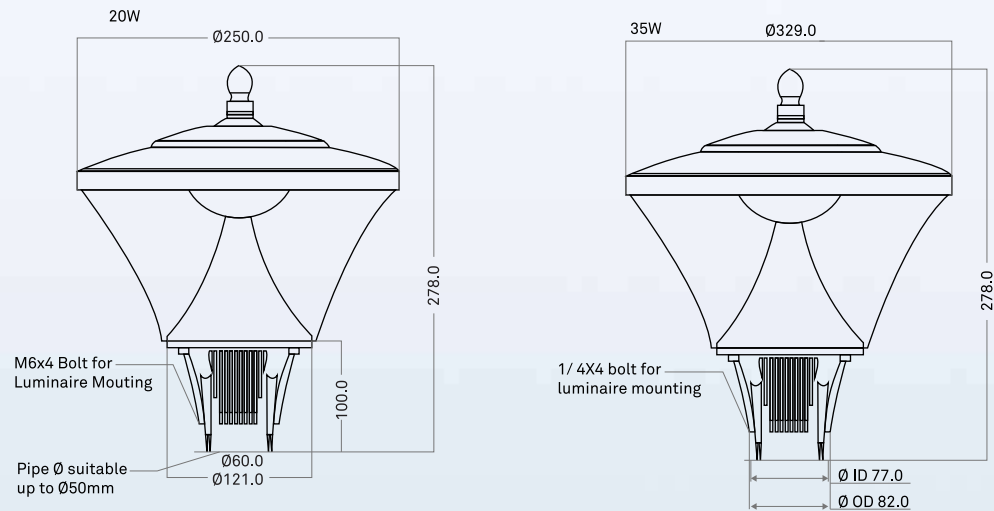

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Power (W) ±10%	Rate Voltage (VAC)	Mains Current (A)	Case Lot (No.s)
LP07-251-XXX-57-CL	20	240	0.08	1
LP07-251-XXX-40-CL	20	240	0.08	1
LP07-431-XXX-57-CL	35	240	0.12	1
LP07-431-XXX-40-CL	35	240	0.12	1
LP07-501-XXX-57-CL	45	240	0.19	1
LP07-501-XXX-40-CL	45	240	0.19	1
LP07-671-XXX-57-CL	60	240	0.08	1
LP07-671-XXX-40-CL	60	240	0.08	1

*Rated System wattage and current will have tolerance as per IS 16104:2012

- Suitable for external pole dia 65mm to 75 mm (To be ordered separately)
- Options of 3000K, 4000K & 5700K CCT available
- Availability of smart and connected options

Inspired | by wonder

Our lights do more than illuminate -
they spark imagination, comfort, and
a quiet sense of joy in everyday moments.




The beacons of velvety night

With whispers of warmth, they guide the way
Through gardens and pathways, where shadows play

Discover Wipro's Column lights,
where elegance and purpose entwine...



01
Tuscan

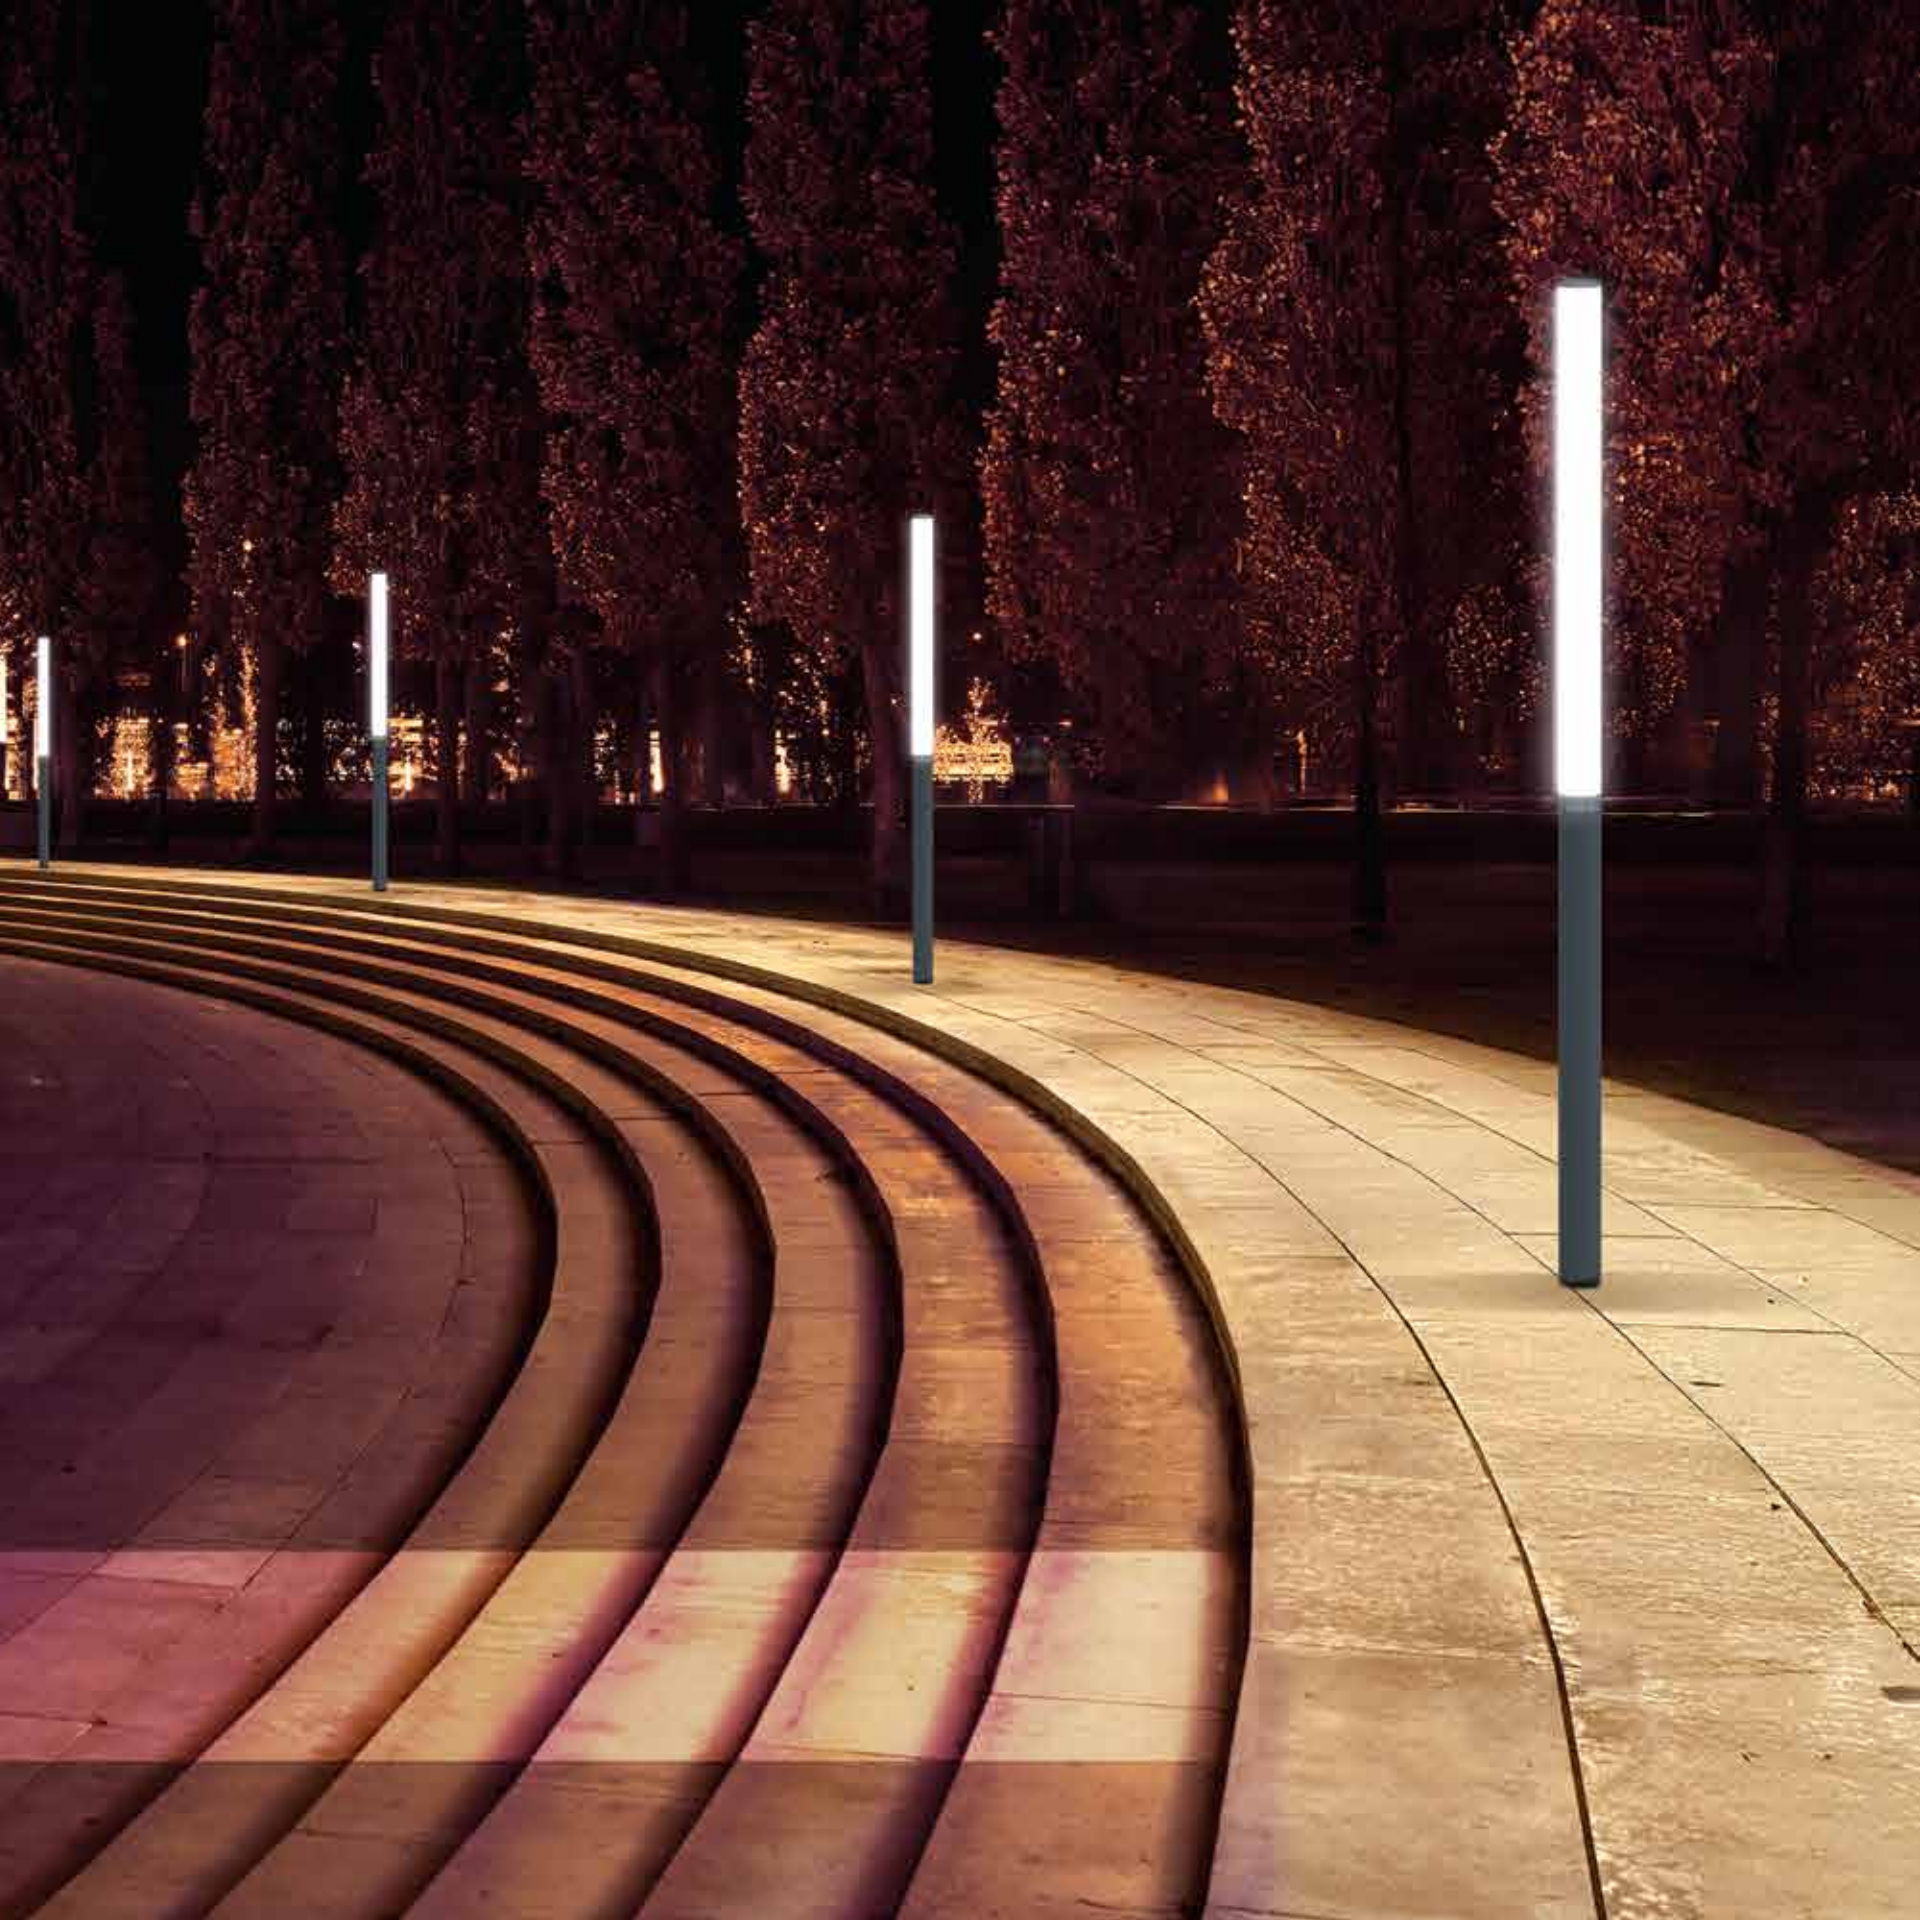






tuscan

All-around brilliance

As the gentle light spreads evenly across the ground, it transforms the space into a serene retreat. Tuscan creates an atmosphere where elegance and tranquility come together, making each step feel like a quiet, illuminated journey.



Elegant tubular LED design

provides uniform ground illumination and softly lit pathways

IP66 potted driver

ensures easy installation, protection and durability

Uniform light output


with high efficacy LEDs

Durable and lightweight luminaire

due to pure polyester powder coated aluminium extruded housing with PDC top ring cover, top ring, coupler & base

Symmetric glare-free illumination

with specially designed extruded seamless milky white PC diffuser



Tuscan column light enhances the beauty of any outdoor setting, creating a warm and inviting atmosphere while providing reliable lighting for pathways and landscapes. Perfect for adding both function and style to your space.

Specifications



IK08



4000K & 5700K CCT



50,000 burning hours



CRI 70



Efficacy up to 100 lm/W




IP65

tuscan



Product Dimensions

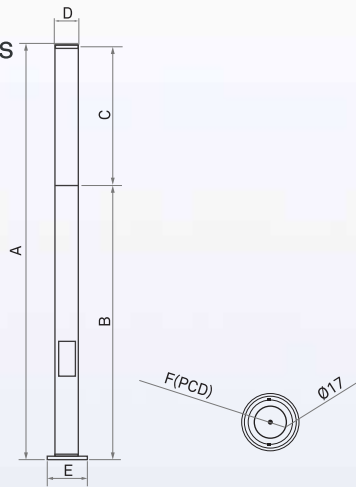

Product Code	Wattage (W)	Dim A ± 10mm	Dim B ± 10mm	Dim C ± 5mm	Dim D ± 2mm	Dim E ± 2mm	Dim. F PCD ± 1 mm
LB34	40	3000	1970	1005	Ø100	Ø215	Ø 160
LB34	70	4000	1970	2005	Ø100	Ø215	Ø 160
LB34B	40	3000	1970	1005	Ø165	Ø280	Ø 232
LB34B	70	4000	1970	2005	Ø165	Ø280	Ø 232


Electrical Data

Product Code	Sub Parts	Product Dim (A) (mm)	Power (W) ±10%	Rated Voltage (V)	Mains Current (A) AC	Approx. Weight (Kg)	Case Lot (No.s)
LB34-591-XXX-57-03	1 LB34ATOP40W-57K	3000	40	240	0.18	8	1
	2 LB34ABOTTOM40W						
LB34-102-XXX-57-04	1 LB34ATOP70W-57K	4000	70	240	0.31	9.5	1
	2 LB34ABOTTOM70W						
LB34B-591-XX-57-03	1 LB34BATOP40W-57K	3000	40	240	0.18	16.4	1
	2 LB34BABOTTOM40W						
LB34B-102-XX-57-04	1 LB34BATOP70W-57K	4000	70	240	0.31	18.4	1
	2 LB34BABOTTOM70W						
LB34-591-XXX-40-03	1 LB34ATOP40W-40K	3000	40	240	0.18	8	1
	2 LB34ABOTTOM40W						
LB34-102-XXX-40-04	1 LB34ATOP70W-40K	4000	70	240	0.31	9.5	1
	2 LB34ABOTTOM70W						
LB34B-591-XX-40-03	1 LB34BATOP40W-40K	3000	40	240	0.18	16.4	1
	2 LB34BABOTTOM40W						
LB34B-102-XX-40-04	1 LB34BATOP70W-40K	4000	70	240	0.31	18.4	1
	2 LB34BABOTTOM70W						

• Tuscan foundation bolt to be order separately

Guiding lights for tranquil evenings

When dusk falls, beacons awaken,
breathing life into the darkened landscape
Discover Wipro's bollards,
spreading gentle warmth that dances through the night

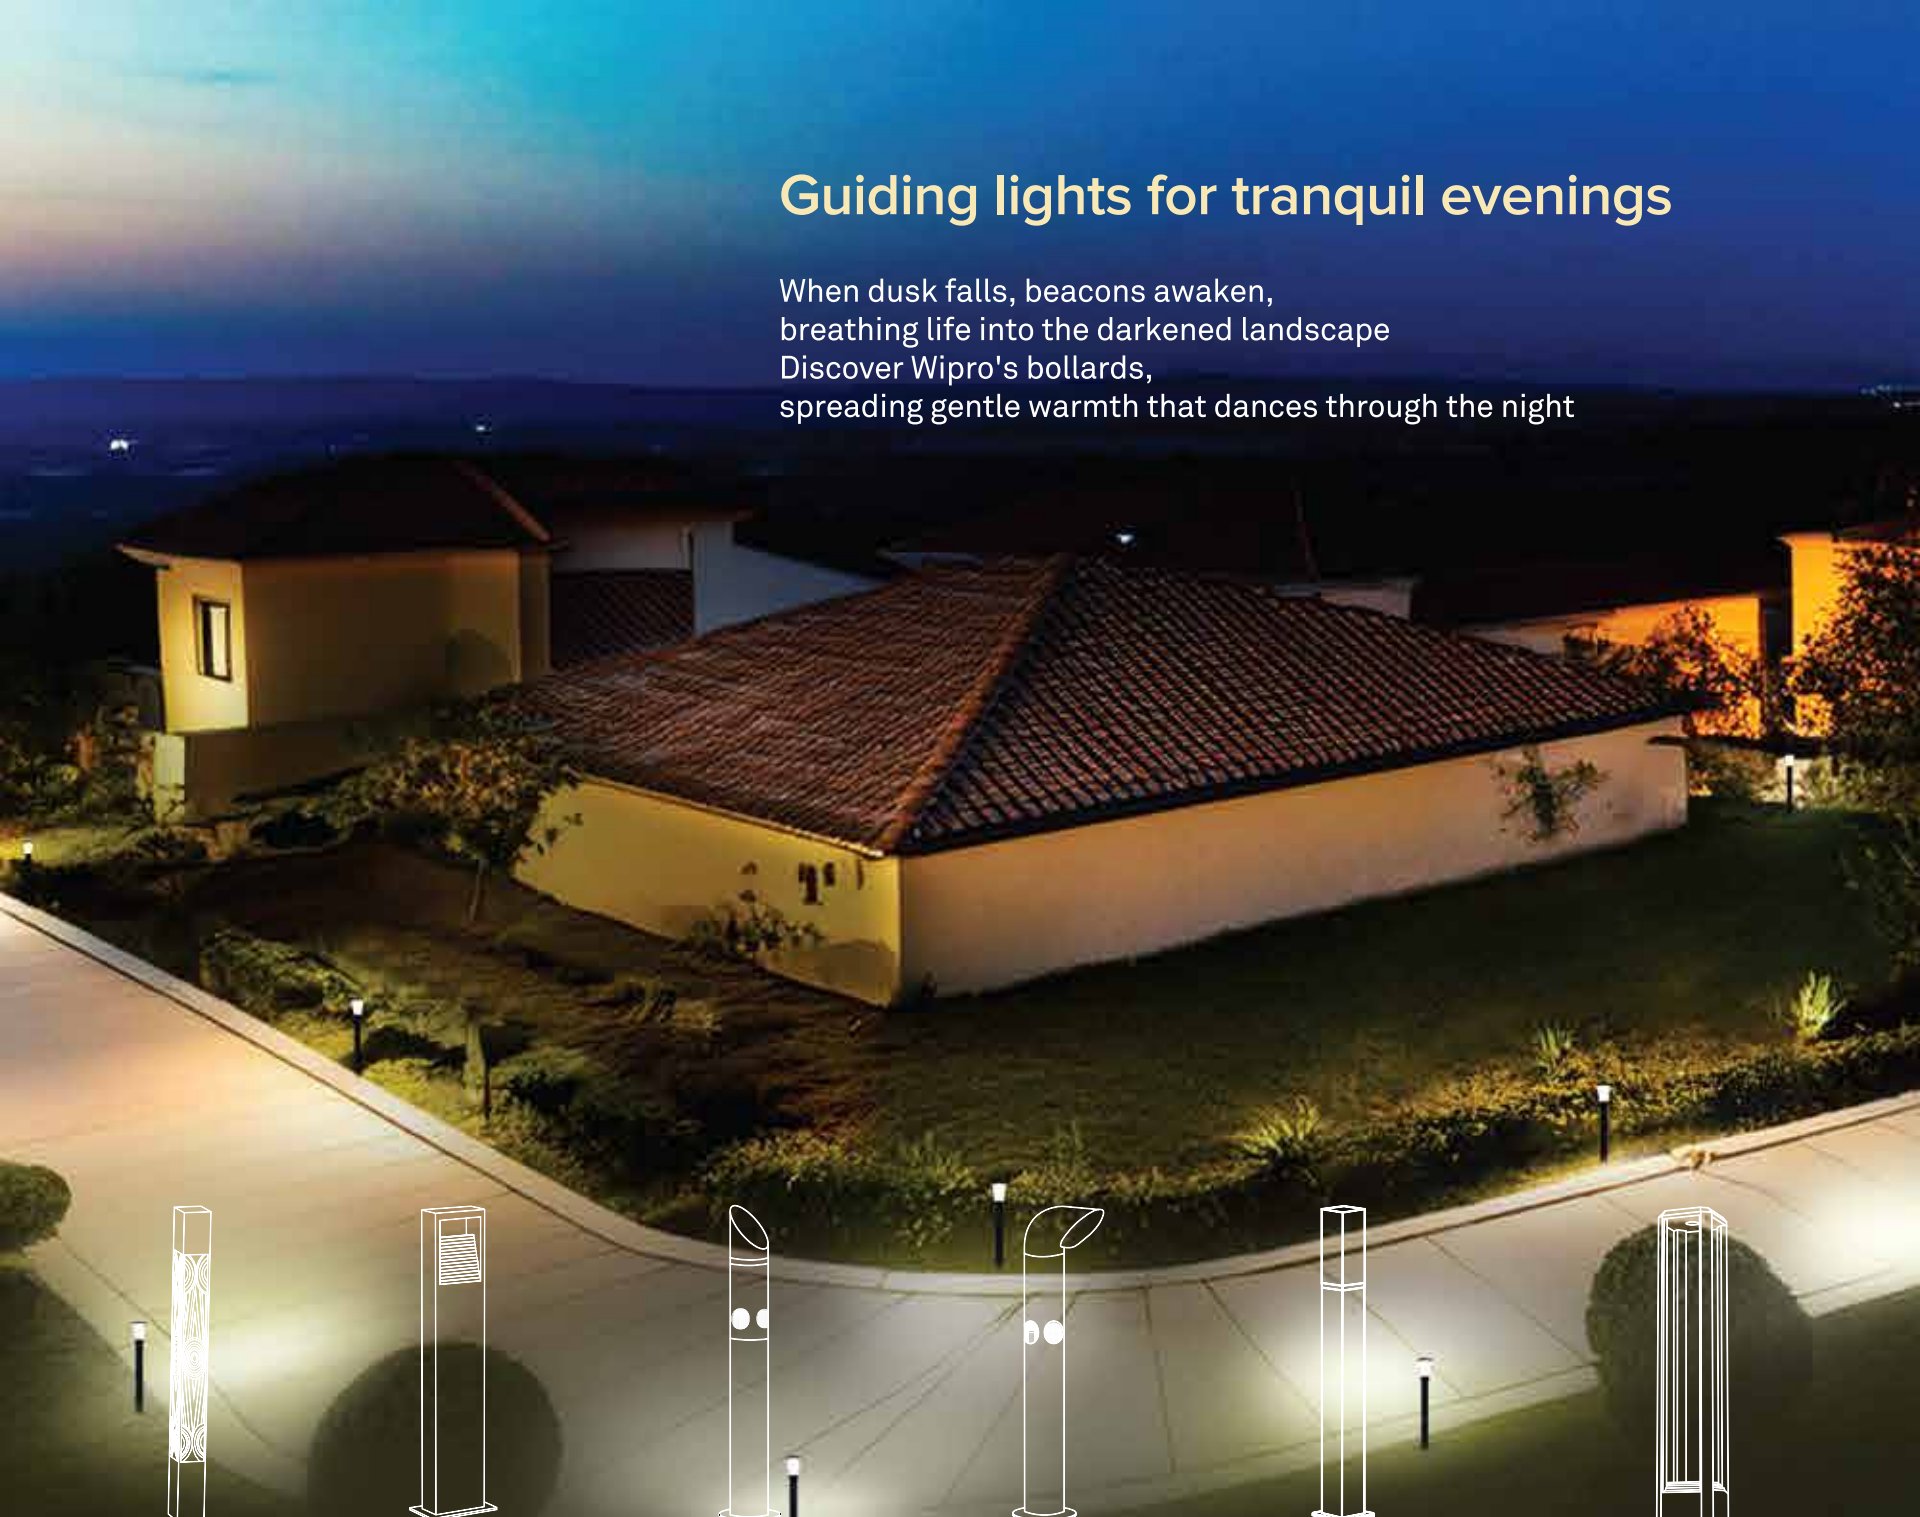


01
Nyx



02
Elevate



03
Whistling
Oyster



04
Whistling J
Bollard



05
Strix



06
Quad



07
Ulix



08
Oyster




09
J Bollard



10
Fantasy



11
Fantasy
Nxt



12
Crest



13
Acorn



nyx
Simply divine



Experience a beautiful synergy of light and shadows that brings nighttime magic to life. For those who seek the unexpected, NYX offers the perfect divine touch to transform your outdoor space into a haven of enchantment.



Uniform light output
with high efficacy COB

Easy installation
with potted driver and
accessories pre-wired up to
terminal block

Almost nil-up light
reduces the light pollution, preserving the
natural ambiance of the environment

Lightweight and rust-free luminaire
with dark grey, pure polyester powder coated
aluminium extruded housing

Glare free light distribution
due to high efficiency transmission
with toughened glass



Nyx is a synergistic blend of light and shadows, enhancing the nighttime magic. It is a divine touch for your outdoor spaces. With its exquisite designs and elegant style, Nyx adds a touch of divinity to your strolls and brings landscapes to life.

Specifications



IK10



2700K, 3000K & 6500K CCT



50,000 burning hours



CRI 70



Efficacy up to 30 lm/W




IP65

nyx



Product Dimensions

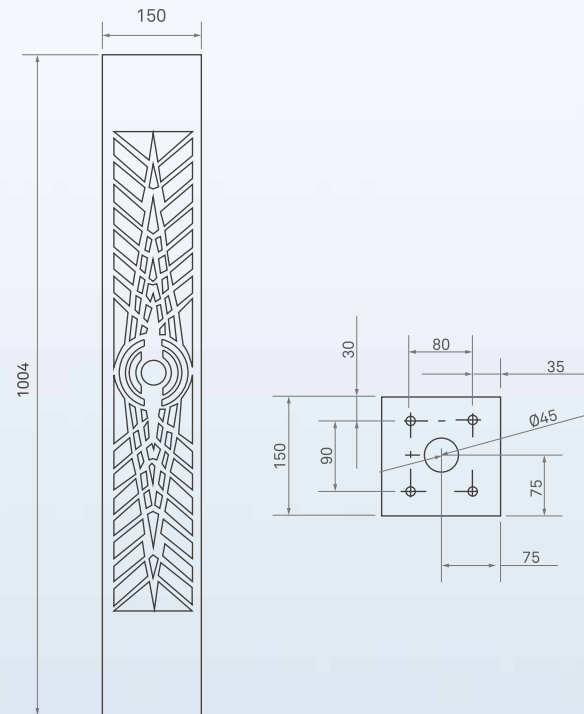

*All dimensions are in tolerance of +/-5mm
Grouting C/c 90 x 80mm.

Electrical Data

Product Code	CCT	System Wattage (W) ±2	Rated Voltage (V)	*Input Current (A)	Case Lot (No.s)	Approx. Weight (kg)
LB17-131-DE1-30-XX	3000	11	240	0.05	1	4.3
LB17-131-DE1-65-XX	6500	11	240	0.05	1	4.3
LB17-131-DE2-30-XX	3000	11	240	0.05	1	4.3
LB17-131-DE2-65-XX	6500	11	240	0.05	1	4.3
LB17-131-DE3-30-XX	3000	11	240	0.05	1	4.3
LB17-131-DE3-65-XX	6500	11	240	0.05	1	4.3

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Options of 2700K, 4000K and 6500K CCT available
- Replace XX Suffix code to SP Code for 5 years warranty






elevate

Seamless light, timeless outdoors

Illuminate and transform your outdoor spaces into a breathtaking landscape with Elevate bollard. Designed with precision and efficiency using our “Optivance™” photometry lens lighting designed that delivers uniform, homogeneous lighting enhances outdoor into mesmerizing vistas.

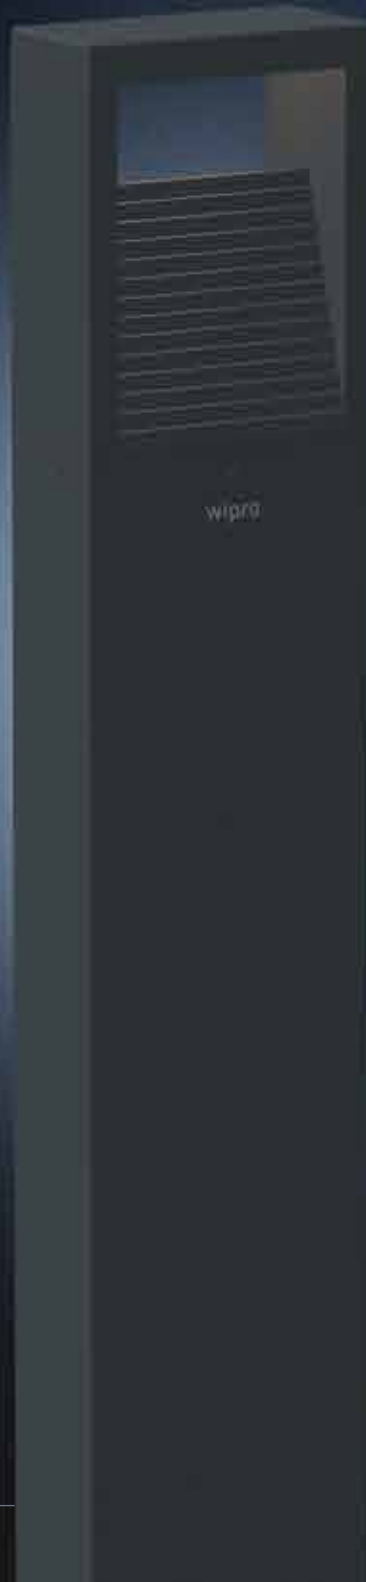

Optional heat dissipation

with aluminium housing with
a grey polyester finish

Maximum lumen output

with our Optivance™ optics

Long life LEDs

with metal clad PCBs

Wider light distribution

with polycarbonate symmetric lens

Optivance advanced photometry

ensures maximum light spread
with 55° peak intensity



Whether illuminating a serene garden path or a grand outdoor promenade, Elevate Bollard creates an ambiance where architecture and nature unite in perfect harmony.

Specifications



IK10



4000K & 5700K CCT



50,000 burning hours



CRI 70




Efficacy up to 70-100 lm/W




elevate



Product Dimensions

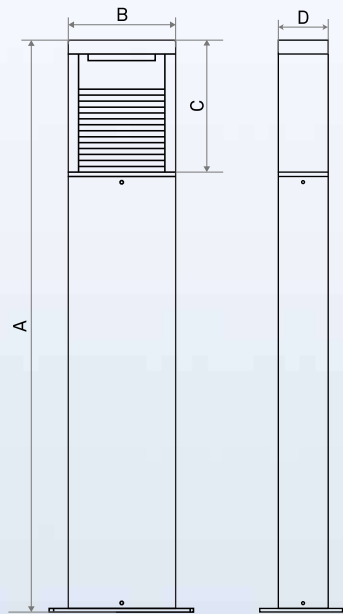

Product Code	Wattage (W)	Dim A ± 5mm	Dim B ± 2mm	Dim C ± 2mm	Dim D ± 2mm	Dim E ± 2mm	Dim F ± 2mm	Dim. G ± 2 mm
LB34	40	3000	1970	1005	Ø100	Ø215	Ø215	170
LB34	70	4000	1970	2005	Ø100	Ø215	Ø215	170

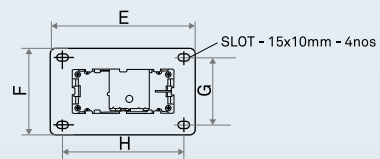

*All dimensions are in tolerance of +/-2mm

Electrical Data

Product Code	Power (W) ±2%	Rated Voltage (V)	Mains Current (A)	Approx. Weight (kg)	Case Lot (No.s)
LB36-131-ASM-57-XX	11W	240	0.05	3.0	4
LB36-131-SYM-57-XX	11W	240	0.05	3.0	4

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Options of 3000K, 4000K and 5700K CCT available
- Replace XX Suffix code to SP Code for 5 years warranty





whistling oyster

A symphony of light and sound

Pathways shine bright, and landscapes are defined with the Whistling Oyster bollard, filling the air with melody. Its directional reflector crafts LED beams in a soft, asymmetric glow. Efficiency meets elegance, transforming every space it touches.



IP65 potted driver

ensures easy installation
and long service life

Uniform light output

with high efficacy LEDs

Functional asymmetric distribution

due to asymmetric dual optics with
directional reflector


Lightweight and rust-free luminaire

with dark grey, pure polyester powder coated
aluminium extruded housing

High efficiency transmission

with specially designed, injection molded,
seamless, asymmetric PC diffuser

Speaker compartment

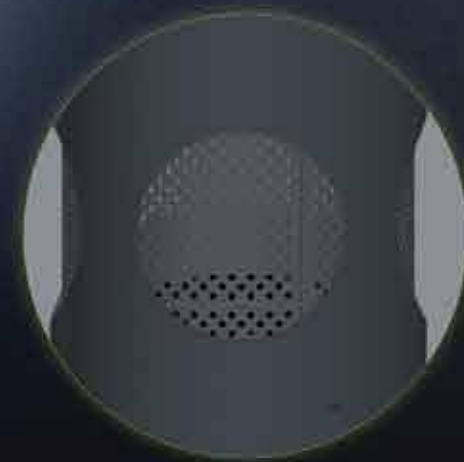

Whistling Oyster, with its pleasing design, ensures glare-free illuminated walkways and enhances the outdoor aesthetics with melody, creating enigmatic experiences.



speaker compartment
perforated mesh



speaker module 5W

Specifications



IK10



3000K & 6500K CCT



50,000 burning hours




CRI 80



Efficacy up to 50 lm/W



Product Dimensions

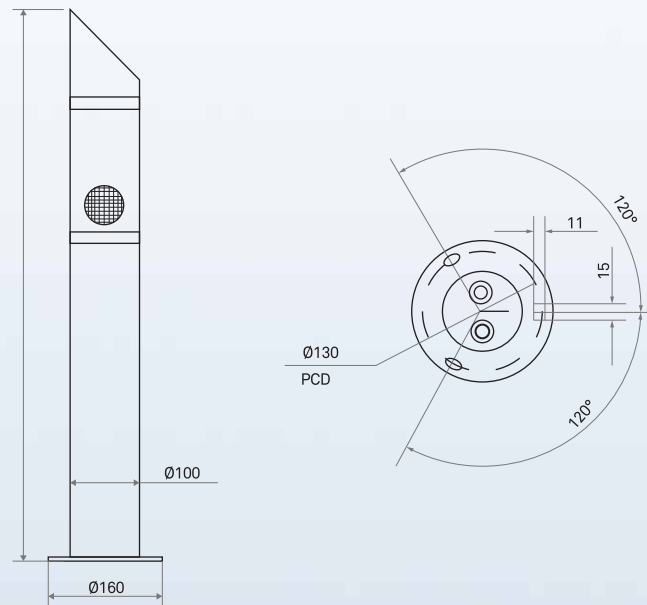

*All dimensions are in tolerance of +/-2mm

Electrical Data

Product Code	Power (W) $\pm 5\%$	Rated Voltage (V)	Mains Current (A)	Approx. Weight (kg)	Case Lot (No.s)
LB12-880-SPKTR-30-08	7	240	0.030	4.0	1
LB12-880-SPKTR-65-08	7	240	0.030	4.0	1
LB12-131-SPKTR-30-08	11	240	0.048	4.0	1
LB12-131-SPKTR-65-08	11	240	0.048	4.5	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Options of 3000K, 4000K and 6500K CCT available
- 08 stands for height | 08 = 800mm





whistling J bollard

Sculpting atmospheres with light and sound

Whistling J, a beacon of LED brilliance, enchants the surroundings with its delicate glow. Landscapes are adorned with an elegant asymmetry, and the embedded speakers infuse the atmosphere with a melodious whisper, creating a space where light and sound converge in perfect harmony.

IP65 potted driver

simplifies installation
and extends life

Consistent illumination

with high efficacy LEDs for
uniform light

Efficient light transmission

with specially designed, injection
molded, seamless, asymmetric
PC diffuser

Lightweight and rust-free luminaire

with dark grey, pure polyester powder
coated aluminium extruded

Precise asymmetric distribution

with dual optics with directional reflector

Speaker compartment

Whistling J Bollard ensures better illumination on walkways, effortlessly enhancing outdoor spaces with delightful musical and social experiences.



speaker compartment perforated mesh



speaker module 5W

Specifications



IK10



3000K & 6500K CCT



50,000 burning hours




CRI 80



Efficacy up to 30 lm/W



Product Dimensions

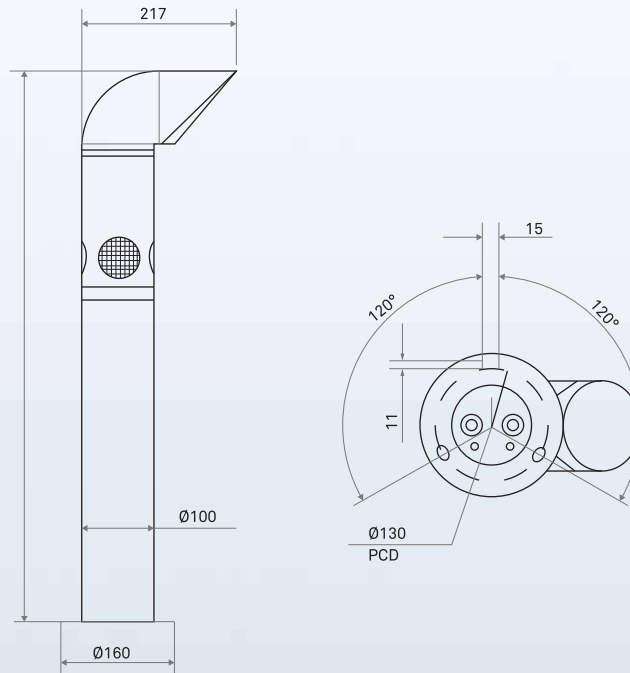

*All dimensions are in tolerance of +/-2mm

Electrical Data

Product Code	Power (W) $\pm 5\%$	Rated Voltage (V)	Mains Current (A)	Approx. Weight (kg)	Case Lot (No.s)
LB13-880-SPK-30-08	7	240	0.030	4.0	1
LB13-880-SPK-65-08	7	240	0.030	4.0	1
LB13-131-SPK-30-08	11	240	0.048	4.0	1
LB13-131-SPK-65-08	11	240	0.048	4.5	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012


- Option of 6500K CCT available
- 08 stands for height | 08 = 800mm





Where warmth meets the outdoors

Our lighting brings families together -
seamlessly blending comfort, ambience,
and connection under open skies.

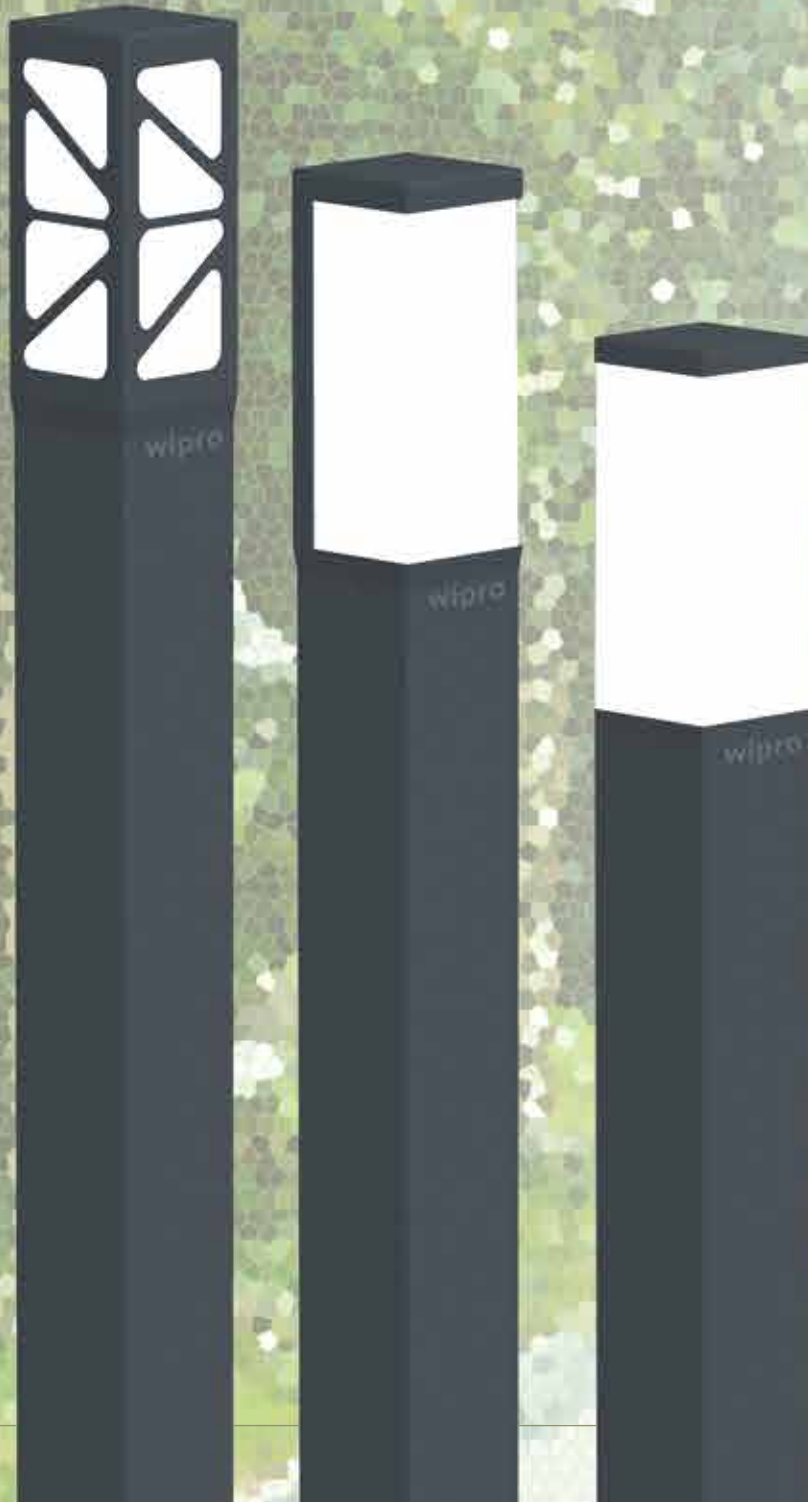

strix

Here style meets light

Features & Benefits

Rust-free luminaire

dark grey, pure polyester powder coated aluminium housing for an excellent finish

Unique head design

spreads uniform light all around ground surface due to PC diffuser

IP65 potted driver

ensures easy installation and durability over time

Optimum light output

with high efficacy LEDs deliver a uniform light spread



Specifications



IK10



3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 80




Efficacy up to 100 lm/W

strix



Product Dimensions

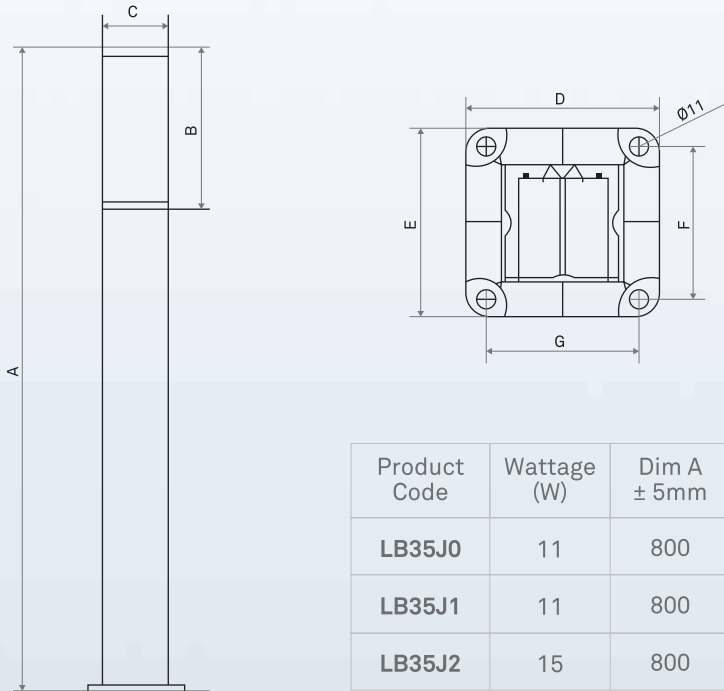

Product Code	Wattage (W)	Dim A ± 5mm	Dim B ± 2mm	Dim C ± 2mm	Dim D ± 2mm	Dim E ± 2mm	Dim F ± 2mm	Dim G ± 2mm
LB35J0	11	800	204	80	120	120	96	96
LB35J1	11	800	204	83	120	120	96	96
LB35J2	15	800	204	83	120	120	96	96

Electrical Data

Product Code	Power (W) ±10%	Rated Voltage (V)	Mains Current (A) AC	Approx. Weight (Kg)	Case Lot (No.s)
LB35-131-XXX-57-J0	11	240	0.05	2	4
LB35-131-XXX-40-J0	11	240	0.05	2	4
LB35-131-XXX-57-J1	11	240	0.05	2.2	4
LB35-131-XXX-40-J1	11	240	0.05	2.2	4
LB35-171-XXX-57-J2	15	240	0.06	2.2	4
LB35-171-XXX-40-J2	15	240	0.06	2.2	4

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available



quad

A charm for your outdoor spaces

Features & Benefits

High efficacy LEDs

provide uniform and optimum light output

Glare-free light distribution

with high efficiency transmission
polycarbonate diffuser

Light weight and rust-free luminaire

due to pure polyester powder coated
aluminium casted housing

Easy installation

due to potted driver and accessories
pre-wired up to terminal block

Functional symmetric illumination

provides more light on the walkways



Specifications



IK07



4000K & 5700K CCT



50,000 burning hours



CRI 80




Efficacy up to 80 lm/W

quad



Product Dimensions

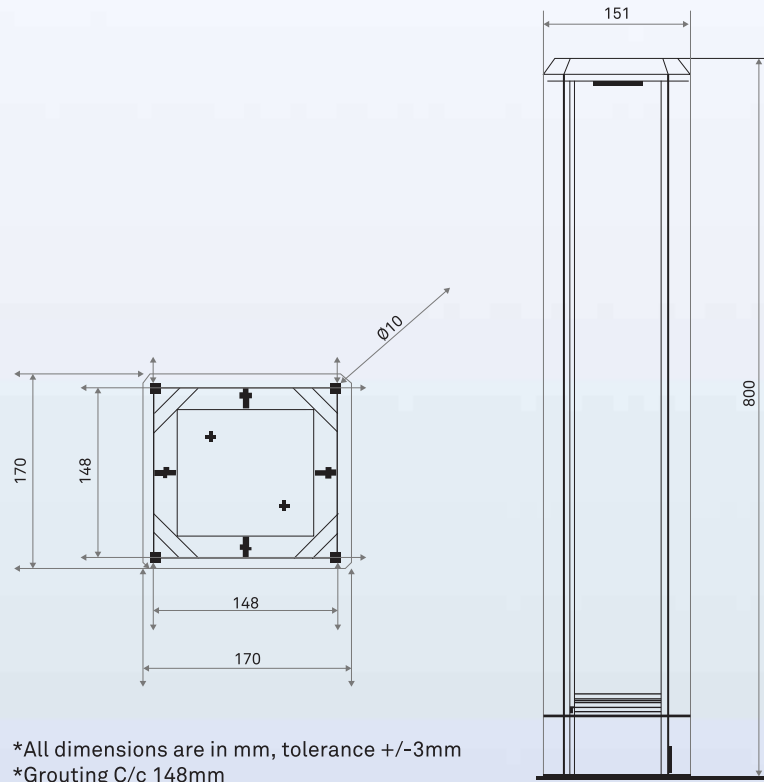

Electrical Data

Product Code	System Wattage (W+/-2)	Rated Voltage (Vac)	*Input Current (A)	Case Lot (Nos.)	Approx. Weight (kg)
LB18-111-XXX-57-08	8	240	0.035	4	2.4
LB18-111-XXX-40-08	8	240	0.035	4	2.4
LB18-131-XXX-57-08	11	240	0.043	4	2.4
LB18-131-XXX-40-08	11	240	0.043	4	2.4

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm



ulix
Night-time mystified

Features & Benefits

High efficacy LEDs

provide uniform and optimum light output

Glare-free light distribution

with functional symmetry for more light on pathways

Light weight and rust-free

luminaire due to pure polyester powder coated aluminium casted housing

Ease of installation

for long service life



Specifications



IK07



4000K & 5700K CCT



50,000 burning hours



CRI 80




Efficacy up to 80 lm/W

ulix



Product Dimensions

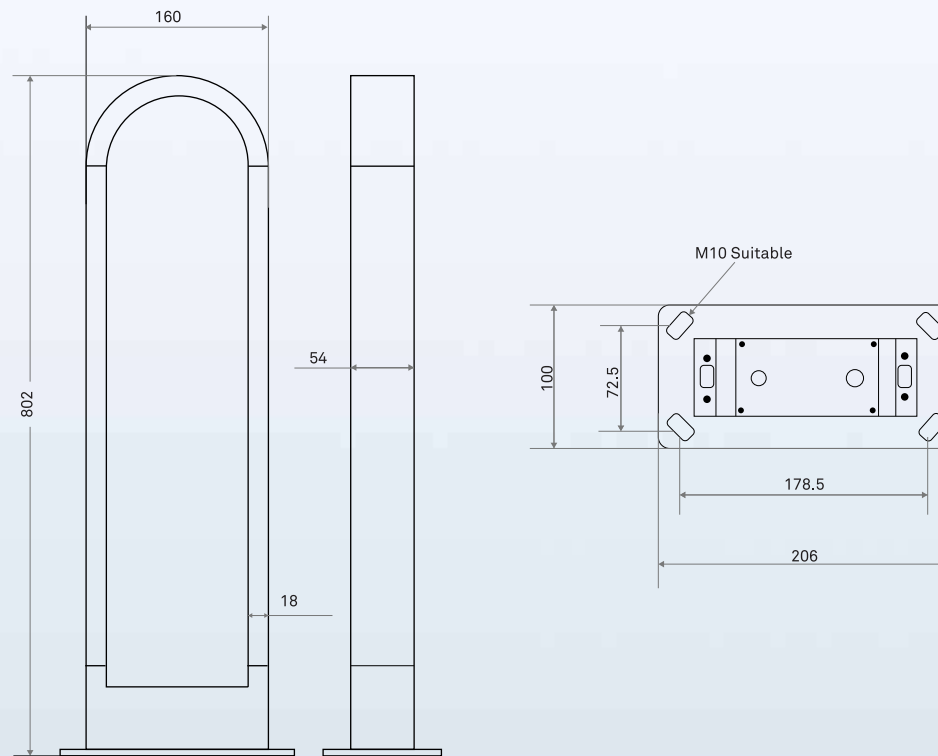

*All dimensions are in tolerance of +/-5 mm
 *Grouting C/c 178.5 x 72.5mm

Electrical Data

Product Code	System Wattage (W+/-2)	Rated Voltage (Vac)	*Input Current (A)	Case Lot (Nos.)	Approx. Weight (kg)
LB19-111-XXX-57-08	8	240	0.035	4	2.2
LB19-111-XXX-40-08	8	240	0.035	4	2.2
LB19-131-XXX-57-08	11	240	0.043	4	2.2
LB19-131-XXX-40-08	11	240	0.043	4	2.2

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm



wipro

oyster

Perfect light for every space

Features & Benefits

Durable and lightweight luminaire

with wust-free dark grey aluminum with pure polyester powder coating

Superior light efficiency

featuring an injection-molded, seamless, asymmetric PC diffuser

Reliable IP65 driver

offers easy installation and durability

Uniform light output

with high efficacy LEDs

Functional asymmetric distribution

due to asymmetric dual optics with directional reflector



Specifications



IK10



3000K & 6500K CCT



50,000 burning hours



CRI 80




Efficacy up to 50 lm/W

oyster



Product Dimensions

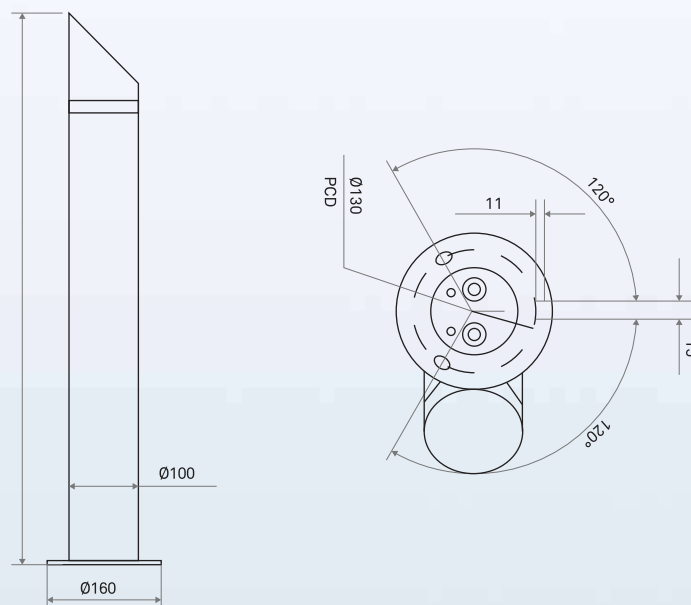

*All dimensions are in mm, tolerance +/-2mm
Available in 500mm & 800mm

Electrical Data

Product Code	Product Dim (mm)	Power (W) $\pm 5\%$	Rated Voltage (V)	Mains Current (A)	Approx. Weight (Kg)	Case Lot (No.s)
LB12-880-XXX-30-05	500	7	240	0.030	3.0	1
LB12-880-XXX-30-08	800	7	240	0.030	4.0	1
LB12-880-XXX-65-05	500	7	240	0.030	3.0	1
LB12-880-XXX-65-08	800	7	240	0.030	4.0	1
LB12-131-XXX-30-05	500	11	240	0.048	3.0	1
LB12-131-XXX-30-08	800	11	240	0.048	4.0	1
LB12-131-XXX-65-05	500	11	240	0.048	3.0	1
LB12-131-XXX-65-08	800	11	240	0.048	4.0	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm



wipro

J bollard

Perfect light for every space

Features & Benefits

Rust-free luminaire

constructed with dark grey, powder-coated aluminium for a sleek, durable finish

High-performance light transmission

with specially designed injection-molded, seamless, asymmetric PC diffuser

IP65 potted driver

ensures easy installation and durability over time

Even LED illumination

with high efficacy LEDs deliver a uniform light spread

Asymmetric light distribution

achieved with asymmetric dual optics with directional reflector



Specifications



IK10



3000K & 6500K CCT



50,000 burning hours




CRI 80



Efficacy up to 30 lm/W

Product Dimensions

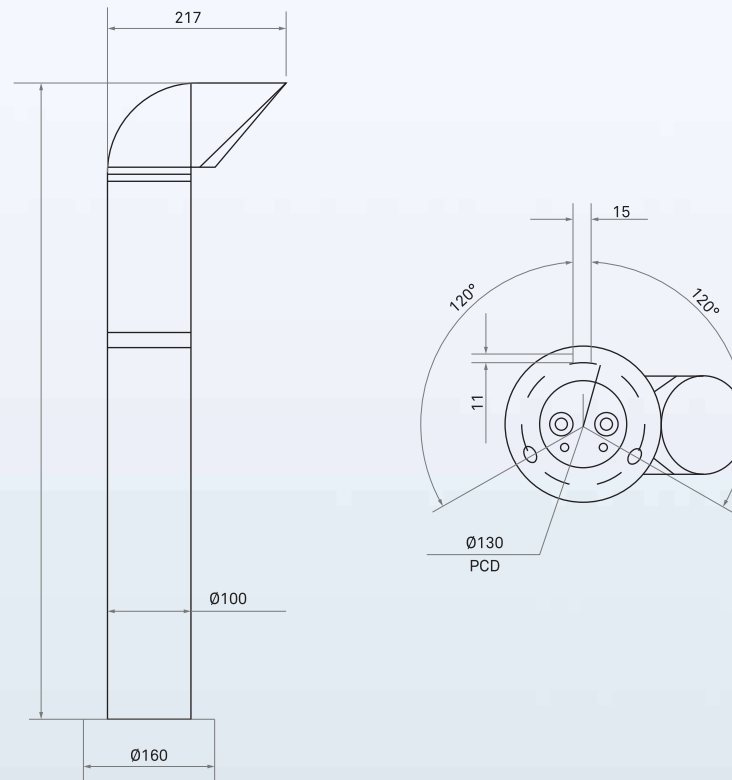

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Product Dim (mm)	Power (W) $\pm 5\%$	Rated Voltage (V)	Mains Current (A)	Approx. Weight (Kg)	Case Lot (No.s)
LB13-880-XXX-30-05	500	7	240	0.030	3.0	1
LB13-880-XXX-30-08	800	7	240	0.030	4.0	1
LB13-880-XXX-65-05	500	7	240	0.030	3.0	1
LB13-880-XXX-65-08	800	7	240	0.030	4.0	1
LB13-131-XXX-30-05	500	11	240	0.048	3.0	1
LB13-131-XXX-30-08	800	11	240	0.048	4.0	1
LB13-131-XXX-65-05	500	11	240	0.048	3.0	1
LB13-131-XXX-65-08	800	11	240	0.048	4.0	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm





wipro

fantasy

For serene outdoors

Features & Benefits

Optimal light transmission

with a seamless milky white PC diffuser for high-efficiency lighting

Durable IP66 driver

facilitates straightforward installation and long-term use

Consistent LED light output

due to high-efficacy LEDs that deliver uniform illumination

Glare-free distribution

as the functional symmetry provides enhanced lighting for walkways

Rust-free and lightweight design

made from pure polyester powder-coated aluminium for durability and reduced weight



Specifications



IK10



3000K, 4000K & 6500K CCT



50,000 burning hours




CRI 70



Efficacy up to 70 lm/W

Product Dimensions

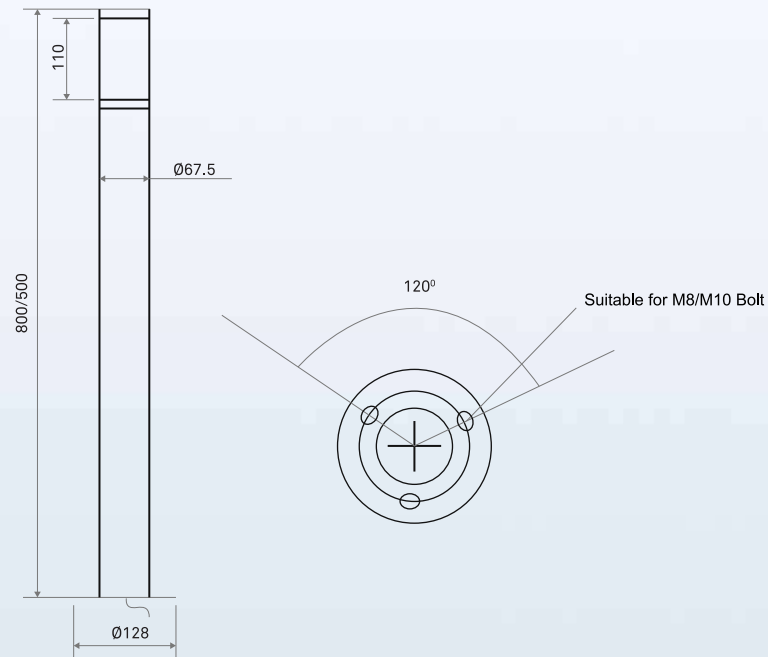

*All dimensions are in mm, tolerance +/-5mm
 *Available in 800mm & 500mm

Electrical Data

Product Code	Product Dim (mm)	Power (W) ±5%	Rated Voltage (V)	Mains Current (A)	Approx. Weight (Kg)	Case Lot (No.s)
LB14-880-XXX-30-05	540	7	240	0.030	2.5	1
LB14-880-XXX-30-08	840	7	240	0.030	3.0	1
LB14-880-XXX-65-05	540	7	240	0.030	2.5	1
LB14-880-XXX-65-08	840	7	240	0.030	3.0	1
LB14-131-XXX-30-05	540	11	240	0.048	2.5	1
LB14-131-XXX-30-08	840	11	240	0.048	3.0	1
LB14-131-XXX-65-05	540	11	240	0.048	2.5	1
LB14-131-XXX-65-08	840	11	240	0.048	3.0	1

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 6500K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm

fantasy





wipro

fantasy nxt

Casting gentle glow every night

Features & Benefits

High efficiency transmission

with specially designed extruded seamless milky white PC diffuser

IP66 potted driver

ensures easy installation and long service life

High efficacy LEDs

provide uniform and optimum light output

Glare-free light distribution

with functional symmetry for more light on walkways

Lightweight and rust free luminaire

due to pure polyester powder coated aluminium extruded housing



Specifications



IK10



5700K CCT



50,000 burning hours




CRI 70



Efficacy up to 80 lm/W

Product Dimensions

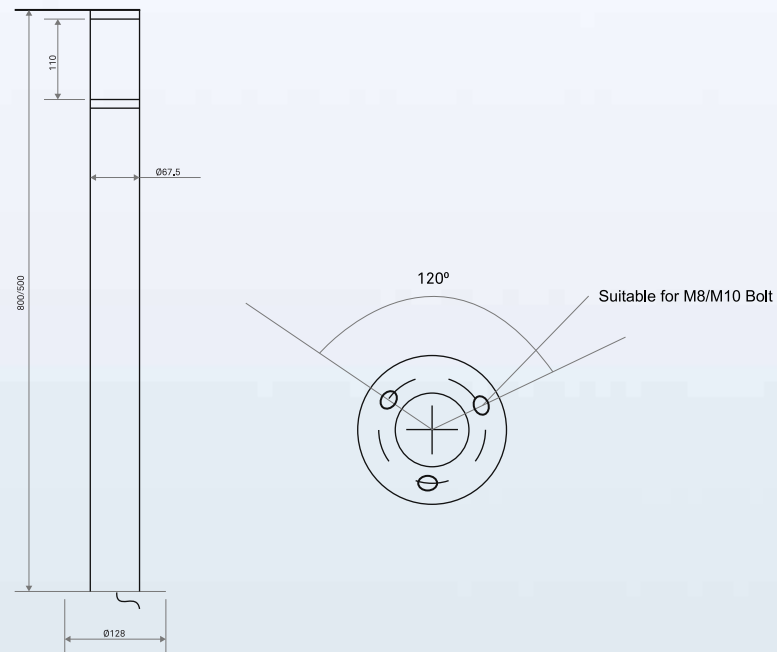

*All dimensions are in mm, tolerance +/-5mm
 *Available in 800mm & 500mm

Electrical Data

Product Code	Product Dim (mm)	Power (W) ±5%	Rated Voltage (V)	Mains Current (A)	Approx. Weight (Kg)	Case Lot (No.s)
LB14-880-X-30-05G1	500	7	240	0.030	1.0	4
LB14-880-X-30-08G1	800	7	240	0.030	1.4	4
LB14-880-X-65-05G1	500	7	240	0.030	1.0	4
LB14-880-X-65-08G1	800	7	240	0.030	1.4	4
LB14-131-X-30-05G1	500	11	240	0.048	1.0	4
LB14-131-X-30-08G1	800	11	240	0.048	1.4	4
LB14-131-X-65-05G1	500	11	240	0.048	1.0	4
LB14-131-X-65-08G1	800	11	240	0.048	1.4	4

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 6500K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm

fantasy nxt





wipro



crest

Soothing illumination for every moment

Features & Benefits

More light on walkways

with symmetric glare-free light distribution
with a polycarbonate diffuser

Water-proof and rust-free luminaire

with pure polyester powder coating

Lightweight luminaire

with aluminium housing for excellent heat dissipation
and high durability

Ideal green lighting

due to high-efficacy LEDs for optimum energy consumption

Nil-up light

which prevent light pollution, minimise skyglow
and improve visibility of the night sky


IP65

Specifications



IK07



2700K, 3000K, 4000K & 5700K CCT



50,000 burning hours



CRI 80




Efficacy up to 80 lm/W

crest



Product Dimensions

Dark Sky Approved

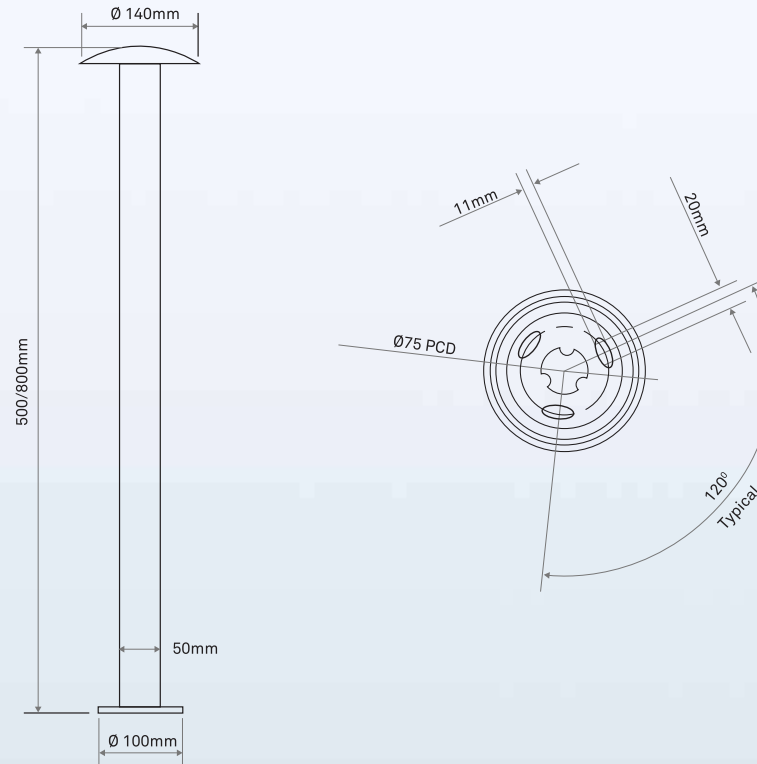

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	System Wattage (W)	Rated Voltage (V)	Case Lot (Nos.)	Approx. Weight (kg)
LB15-111-XXX-57-05	8	240	4	1.0
LB15-111-XXX-40-05	8	240	4	1.0
LB15-131-XXX-57-05	11	240	4	1.0
LB15-131-XXX-40-05	11	240	4	1.0
LB15-111-XXX-57-08	8	240	4	1.3
LB15-111-XXX-40-08	8	240	4	1.3
LB15-131-XXX-57-08	11	240	4	1.3
LB15-131-XXX-40-08	11	240	4	1.3

*Rated system wattage and current will have tolerance as per IS 16104: 2012

- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm



wipro

acorn

Creating inviting outdoor atmosphere

Features & Benefits

Unparalleled performance

due to pure polyester powder coating for rust prevention and weather resistance

Lightweight luminaire

with aluminium casing designed to effectively dissipate heat

Sustainable lighting

with high-efficacy LEDs achieve optimum energy efficiency

Quick and effortless setup

due to potted driver and accessories pre-wired up to the terminal block



Specifications



IK07



4000K & 5700K CCT



50,000 burning hours



CRI 70




Efficacy up to 100 lm/W

acorn



Product Dimensions

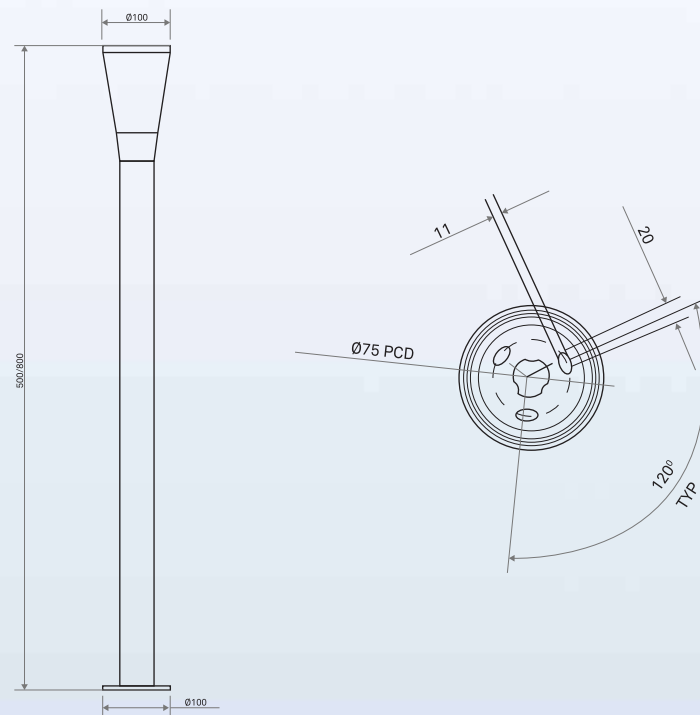

*All dimensions are in mm, tolerance +/-5mm

Electrical Data

Product Code	Product Dim (mm)	System Wattage (W) $\pm 5\%$	Rated Voltage (V)	Input Current (A)	Approx. Weight (Kg)	Case Lot (No.s)
LB16-111-XXX-57-05	500	8	240	0.035	0.65	4
LB16-111-XXX-40-05	500	8	240	0.035	0.65	4
LB16-131-XXX-57-05	500	11	240	0.048	0.65	4
LB16-131-XXX-40-05	500	11	240	0.048	0.65	4
LB16-111-XXX-57-08	800	8	240	0.035	0.95	4
LB16-111-XXX-40-08	800	8	240	0.035	0.95	4
LB16-131-XXX-57-08	800	11	240	0.048	0.95	4
LB16-131-XXX-40-08	800	11	240	0.048	0.95	4

*Rated system wattage and current will have tolerance as per IS 16104: 2012


- *Also available in X5 code with 5 years warranty
- Option of 3000K, 4000K and 5700K CCT available
- 08 stands for height | 08 = 800mm, 05 = 500mm



Riverfronts



Urban and residential streets



Parking areas



Parks and playgrounds

Here light meets life

In diverse outdoor spaces, Wipro's landscape luminaires light up the nights, turning them into welcoming places. These luminaries bring beauty and safety while adding charm to your landscape.



**Boulevards
and avenues**



**Periphery
lighting**



**Cycle tracks
and footpaths**



**Public transport
areas**

Made to create ideal environments

Our landscape range is meticulously crafted with precision and innovation, embodying our vision of perfection and harmony.

The logo for 'Utopia' is rendered in a light green, sans-serif font. The letter 'U' is stylized, with a thin horizontal line extending from its top left and curving upwards to form a small, modern lamp head. The word 'Utopia' is underlined with a thin horizontal line.

Utopia

aims to enhance spaces,
making them safer and beautiful,
while illuminating every corner
of the world with delight.



INNOVATION FOR HUMAN SPACES

Wipro's commitment towards co-creating
conscious spaces where people thrive.

**Wipro
advantage**



30+ years of
expertise in lighting



18 branches
across India



Customized
solutions



Pan India
after-sales support



lighting

www.wiprolighting.com | Toll free no: 1800 425 1969 | helpdesk.lighting@wipro.com

Registered Office: Wipro Enterprises (P) Ltd.
'Wipro House', No. 8, 7th Main, 80 Feet Road,
Koramangala, 1st Block, Bangalore 560034

Business Office: Wipro Lighting,
5th Floor, Godrej Eternia-C, Old Pune-Mumbai
Highway, Shivajinagar, Pune 411005
(T) 020 66098700, (F) 020 66098777



Branches: Ahmedabad | Bangalore | Bhubaneswar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata | Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in parts or in whole, without permission, is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.

Follow us on