

ELATELED CRCO10

Recess mounted LED luminaire
with complete diffuser

SEAMLESS
PROFILE
WITH
UNIFORM
ILLUMINATION



upto

55%
ENERGY
SAVINGS



WIPRO LED EDGE

LIGHT SOURCE	DRIVER	OPTICS	THERMAL MANAGEMENT
Best-in-class LED technology High efficiency, LM 80 compliant LEDs Options in colour temperature	Specially designed for Indian power conditions Best-in-class design and manufacturing Complies to SELV design standards ensuring safety	Uniform and glare-free lighting Effective light distribution ensuring high performance	Special design for effective thermal management ensures long service life and consistent performance



ELATELED

Recess mounted LED luminaire
with complete diffuser



Clutter free ceiling

Luminaire blends unobtrusively with the ceiling and seamless profile gives a neat, clean and clutter free look to the ceiling enhancing the overall appearance of the space.



Enhanced Performance

High efficiency LED grade diffuser ensures better light transmission and perfect diffusion of light. Thus enhances the work environment.



Visual Harmony

A soft and soothing light with uniform illumination enriches the work environment that helps in achieving the work task productivity.



High Efficacy LEDs

High efficacy LEDs ensures optimum light output with less energy consumption and lesser Light Power Density (LPD).

SPECIFICATIONS

- White powder coated housing & frame in CRCA sheet
- High efficiency LED grade diffuser
- High efficacy LEDs for better light output
- Electronic driver pre-wired upto the terminal block
- Designed and manufactured to comply with IS 10322 part 5/Sec 1 1987


INSTALLATION

- Suitable for modular ceiling system

ACCESSORIES

- For Gypsum/POP applications additional frame needs to be ordered separately. Order 9180P01025 for aluminium. Or order 9180P01089 for M.S. Case lot 10 pcs/box.

DIMENSION DRAWING

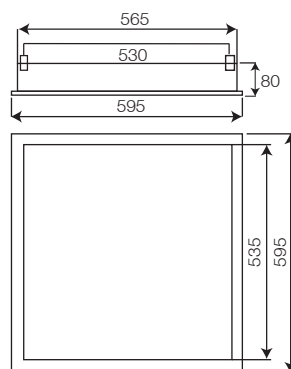

All dimensions are in mm.
Tolerance + 2 mm.

APPLICATIONS



Office



Bank



Education



Conference



Hospital



Assembly
Hall



Reception

ELECTRICAL DATA

IP 20

Product Code	System Wattage (W +/-5%)	Rated Voltage (V)	Mains Current (A)	Case Lot (in Nos)
CRCO10R038HP57GL	36	240	0.18	2
CRCO10R038HP57GL1	36	240	0.18	2

LED is an ever improving and evolving technology. Wipro is committed to bring you the best in LED technology. Data given is representative and can change.

Business Office:

Wipro Lighting, 5 floor, Godrej Eternia - C, Old Pune-Mumbai Road, Shivajinagar, Pune 411 005.
Tel.: 020-66098700, Fax: 020-66098777. E-mail: helpdesk.lighting@wipro.com

Registered Office:

Wipro Enterprises (P) Limited, 'C' Block, CCLG Division,
Doddakannelli, Sarjapur Road, Bangalore - 560035, India.

Toll-free no: 1800-425-1969
www.wiprolighting.com

Follow us on [LinkedIn](#)