

Halo Plus

Uniquely Profiled Surface/ Suspended Downlighter

Creating ambience
with a difference



What makes Halo Plus different?



Aesthetics :

- Compact and trendy design
- Deep inset diffuser to maintain low UGR
- Tapered profile housing with micro texture powder coating
- Aesthetically integrated suspension and power cable in suspended version



Performance:

- Best in class LED with efficacy upto 100 Lm/W and THD<10%



Choice:

- Option available in color: Matte Black & White
- Mounting options: Surface & Suspended

Unique product on aesthetics and performance, ideal for enriching ambience in open ceiling work spaces.

Part of inSync™ range offering human centric lighting.

*12W / 15W only

IoL™
Internet of Lighting

Halo Plus

Uniquely Profiled Surface/ Suspended Downlighter


Specifications

- HET PMMA diffusers provide high transmittivity
- Tapered design blends well with the architecture
- CRCA powder coated housing, available in both black and white colour options
- In compliance to IS 10322 part 5/ Sec1 1987

Installation

Ideal for surface / suspended mounted application.
1.5 meter suspension cable is provided along with the product.

Dimensions Drawing

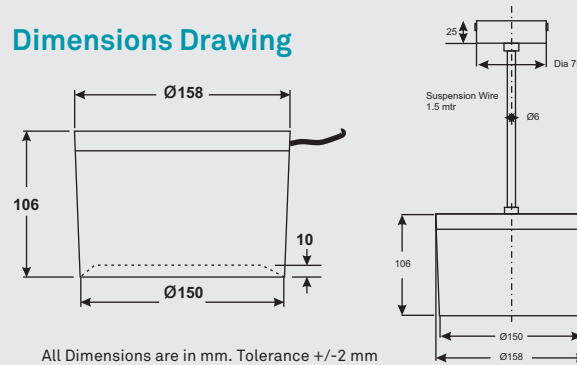

All Dimensions are in mm. Tolerance +/- 2 mm

Electrical Data

IP20

Catalogue No.	Power (W) ±10%	Rated Voltage (VAC)	Input current (Amp)	Case Lot (In No's)
LD99-151-XXX57SMWH	12	240	0.052	12
LD99-151-XXX40SMWH	12	240	0.052	12
LD99-211-XXX57SMWH	15	240	0.065	12
LD99-211-XXX40SMWH	15	240	0.065	12
LD99-281-XXX57SMWH	18	240	0.080	12
LD99-281-XXX40SMWH	18	240	0.080	12
LD99-151-XXX57SMBL	12	240	0.052	12
LD99-151-XXX40SMBL	12	240	0.052	12
LD99-211-XXX57SMBL	15	240	0.065	12
LD99-211-XXX40SMBL	15	240	0.065	12
LD99-281-XXX57SMBL	18	240	0.080	12
LD99-281-XXX40SMBL	18	240	0.080	12
LD99-151-XXX57PMWH	12	240	0.052	12
LD99-151-XXX40PMWH	12	240	0.052	12
LD99-211-XXX57PMWH	15	240	0.065	12
LD99-211-XXX40PMWH	15	240	0.065	12
LD99-281-XXX57PMWH	18	240	0.080	12
LD99-281-XXX40PMWH	18	240	0.080	12
LD99-151-XXX57PMBL	12	240	0.052	12
LD99-151-XXX40PMBL	12	240	0.052	12
LD99-211-XXX57PMBL	15	240	0.065	12
LD99-211-XXX40PMBL	15	240	0.065	12
LD99-281-XXX57PMBL	18	240	0.080	12
LD99-281-XXX40PMBL	18	240	0.080	12

40 - Stands for 4000K
57 - Stands for 5700K
PM - Stands for Pendent mounted

WH - Stands for White housing
BL - Stands for Black housing
SM - Surface mounted

Also available in DALI/ Analog and
white color tunable



Applications



OFFICE



BANKS



HOSPITAL



HOTEL



RETAIL



CAFETERIA



AUDITORIUM



Business Office:

Wipro Lighting, 5th floor, Godrej
Eternia - C, Old Pune-Mumbai Highway,
Shivajinagar, Pune - 411 005, India.
Tel.: 020-6609 8700
Fax: 020-6609 8777
E-mail: helpdesk.lighting@wipro.com

Registered Office:

Wipro Enterprises (P) Limited,
'C' Block, CCLG Division, Doddakannelli,
Sarjapur Road, Bangalore 560 035, India.

Toll-Free No.: 1800-425-1969

www.wiprolighting.com

Follow us on    

Innovation and improvement are a way of life at Wipro.

All rights reserved. Reproduction of this data in part or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.