

Ranger

LED Floodlight LF30



Integral cradle mount LED luminaire



Features /Specifications	Benefits
High efficacy LEDs	Best in class LED to give optimal light output, reduces running cost.
Specially design aluminum heat sink with polyester gray color powder coating	Excellent heat dissipation, good air circulations as well as very light weight.
Technically advanced Fresnel lens	Uniform illumination and wider light distribution
Integral product with LED & potted Driver with accessories	Easy Installation and long service life.
IP66	Protection against dust, insects, water and small items entry into luminaire for safety.
IS 10322 part 5/Sec 5 2013 comply	Comply for general purpose lighting.

Installation & Accessories

Factory fitted cradle with 360° rotations

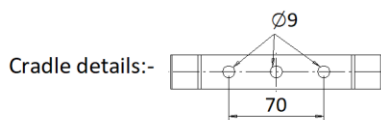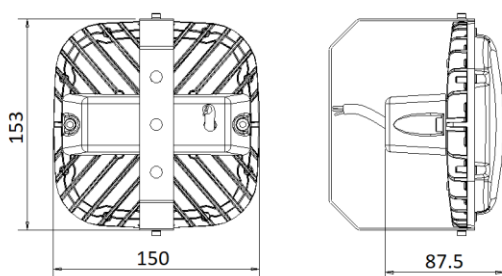

All dimensions are in mm, Tolerance +/-2mm

Applications

Architectural lighting, Landscape lighting, parking area, amenity, security, billboard lighting

Electrical data

Product Code	System Wattage +/-10%	Rated Voltage (V)	Mains Current (A)	Case Lot (Nos)	Approx. Unit Weight (kg)+/- 0.25
LF30-571-XXX-57-XX	40W	240	0.17	8	1.2
LF30-651-XXX-57-XX	50W	240	0.21	8	1.2
LF30-781-XXX-57-XX	60W	240	0.26	8	1.2