

30<sup>+</sup>  
YEARS OF  
WIPRO LIGHTING



## wipro advantage



[www.wiprolighting.com](http://www.wiprolighting.com) | Toll free no: 1800 425 1969 | [helpdesk.lighting@wipro.com](mailto:helpdesk.lighting@wipro.com)

Registered Office: Wipro Enterprises (P) Ltd.  
'Wipro House', No. 8, 7<sup>th</sup> Main, 80 Feet Road,  
Koramangala, 1<sup>st</sup> Block, Bangalore 560034

Business Office: Wipro Lighting,  
5<sup>th</sup> Floor, Godrej Eternia-C, Old Pune-Mumbai  
Highway, Shivajinagar, Pune 411005  
(T) 020 66098700, (F) 020 66098777



Branches: Ahmedabad | Bangalore | Bhubaneswar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata | Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in parts or in whole, without permission, is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.

Follow us on     

# LLANO

Light a symphony

India's first office linear fixture  
with 65° beam angle in collimator lens  
delivering UGR<13



Beam angle  
65°



UGR<13



CRI 90



THD<5%




Shielding  
angle >35°



EMI / EMC  
compliant

Unleash your inner designer with two stunning variants available in 43mm and 53mm widths housed with innovative 65° beam collimator optics and contemporary profile for the premium workspaces.

**Modern office luminaire born from art,  
based on science, and backed by technology**

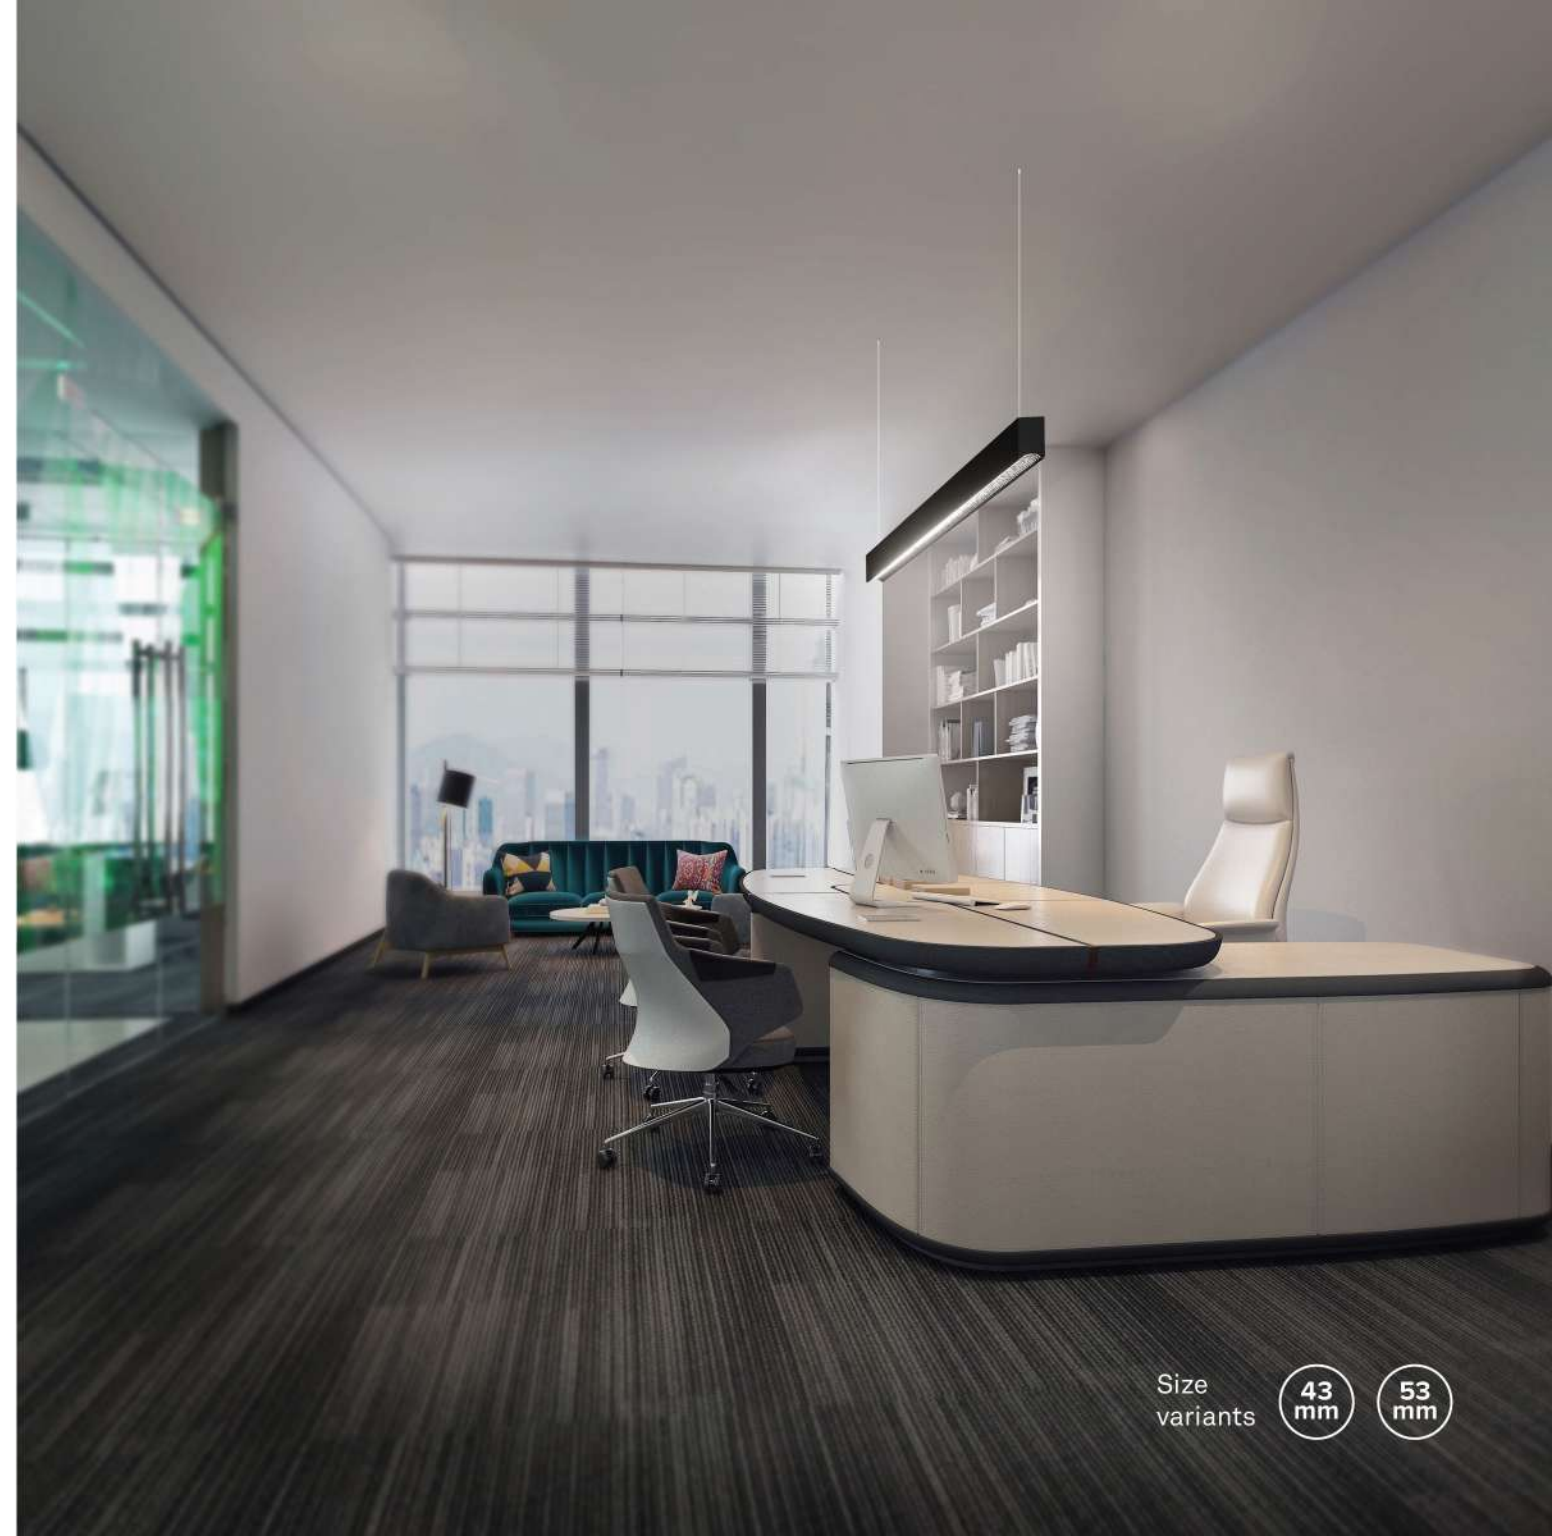

Size  
variants

43  
mm

53  
mm





Unique. Harmonious. Marvelous.


An optical masterpiece, lighting up a symphony



An elliptical collimator paired with a prismatic lens ensures wide distribution and keeps the  $UGR < 13$ , crucial for providing glare-free lighting with optimal illumination.



Uber comfortable lighting  
from an invisible source,  
illuminating more area  
with less fixtures.

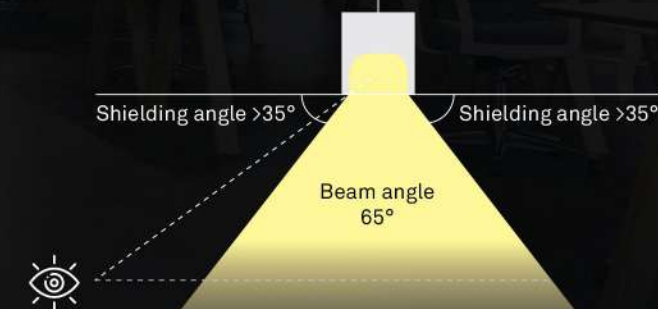


#### 65° beam angle

from wider beam  
collimator lens gives  
wider coverage with  
less number of fixtures

#### >35° shielding angle

ensures comfortable and  
productive lighting with  
unique low glare and  
invisible source

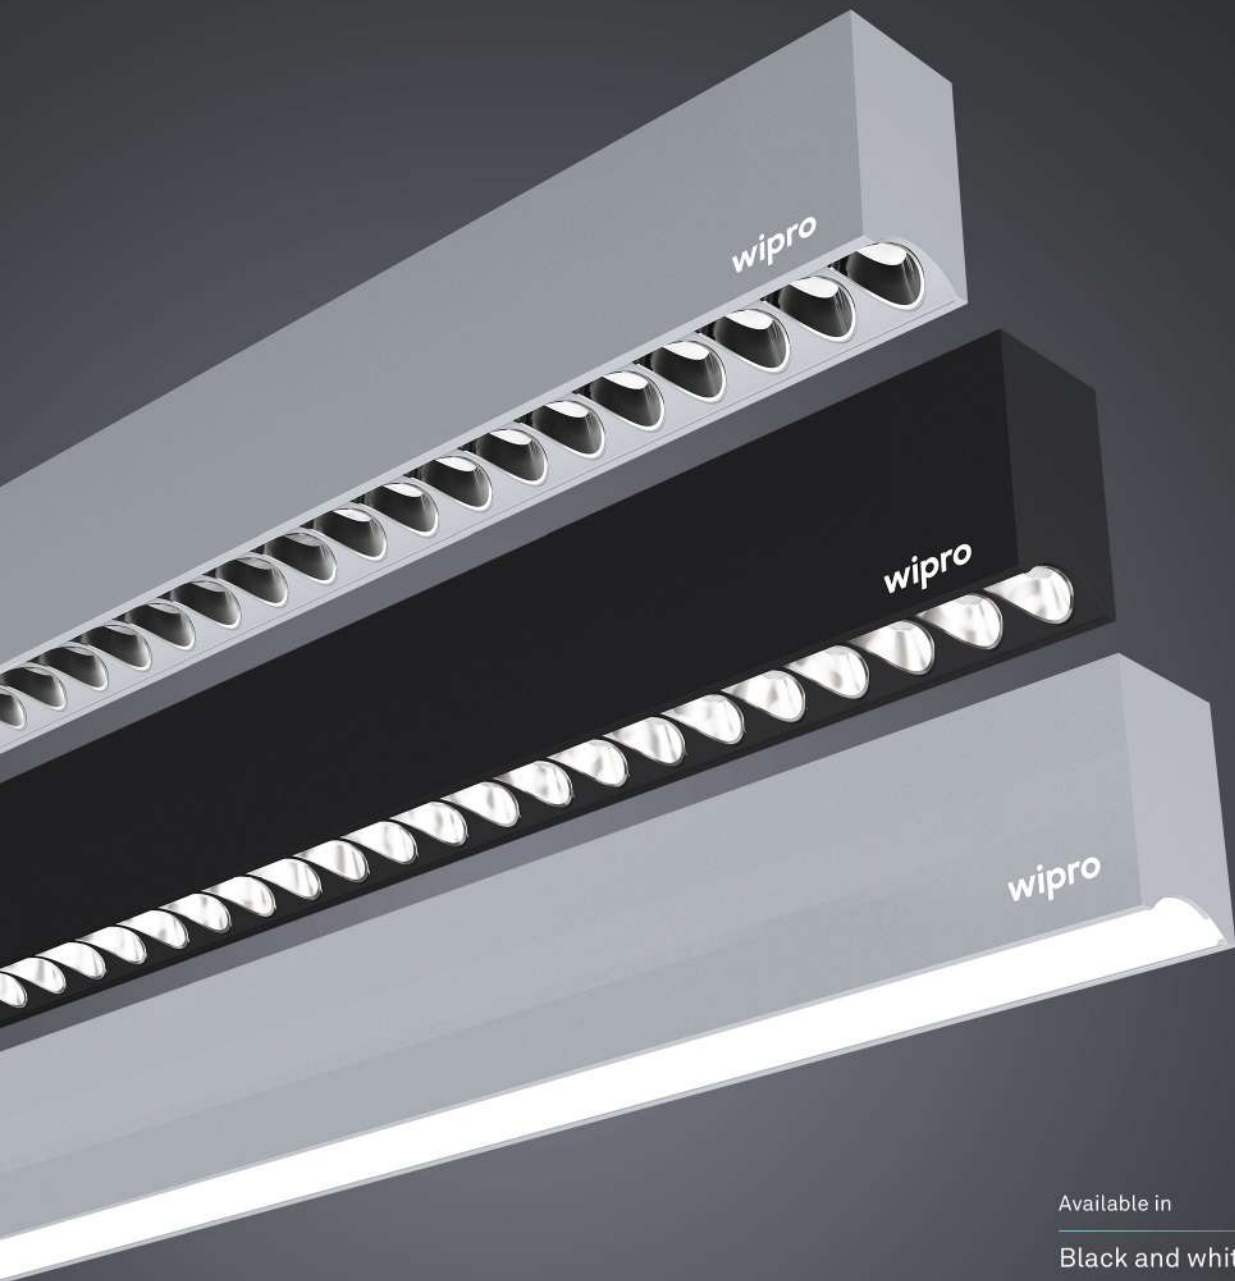


Available in  
Black and white housing  
Black and white bezel reflector

## An expression of **aesthetic minimalism** for contemporary interiors

Sleek modern design with a slim profile available in premium color options for lenses and housing, creating an unforgettable design story.


### Size variants

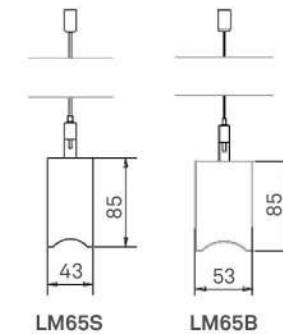

LM65S

LM65B


### Section lengths

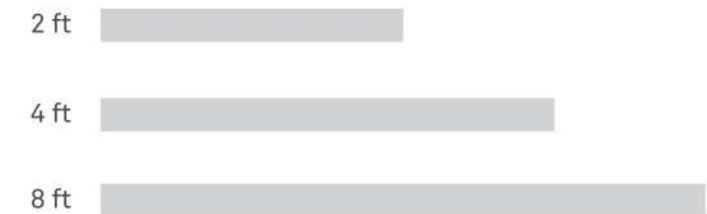

### Suitable for

Work areas | Office spaces | Meeting rooms  
Reception areas | Refurbish application





## Down variant



DALI



CRI 90



120 Lm/W



UGR<16




4000K



5700K

Product Code	Dim A	Dim B	System Wattage (W) +/- 10%	Mains (A)	Approx. Weight (Kg)	Case Lot (No.s)
LM65B-291-BC-57-WX	1104	800	20	0.09	2.6	1
LM65S-291-BC-57-WX	1060	800	20	0.09	2.3	1
LM65B-581-BC-57-WX	2204	900	40	0.18	5.1	1
LM65S-581-BC-57-WX	2116	900	40	0.18	4.6	1
LM65B-151-BC-57-WX	554	300	10	0.04	1.3	1
LM65S-151-BC-57-WX	532	300	10	0.04	1.1	1

- DIM A is length in mm
- DIM B is suspension distance in mm
- BC stands for black chrome lens. For white chrome lens, replace BC with WC
- WX stands for standalone white housing. For continuous, replace X with C
- WX/WC stands for white housing. For black housing, change W with B. For example BX/BC
- Replace 57 with 40 for 4000 CCT



## Up-down variant



DALI



CRI 90



125 Lm/W



UGR<13



4000K




5700K

Product Code	Dim A	Dim B	System Wattage (W) +/- 10%	Mains (A)	Approx. Weight (Kg)	Case Lot (No.s)
LM65B-361-BC-57-WX	1104	800	30	0.13	2.7	1
LM65S-361-BC-57-WX	1060	800	30	0.13	2.4	1
LM65B-721-BC-57-WX	2204	900	60	0.26	5.5	1
LM65S-721-BC-57-WX	2116	900	60	0.26	4.9	1
LM65B-181-BC-57-WX	554	300	15	0.07	1.4	1
LM65S-181-BC-57-WX	532	300	15	0.07	1.2	1

- DIM A is length in mm
- DIM B is suspension distance in mm
- BC stands for black chrome lens. For white chrome lens, replace BC with WC
- WX stands for standalone white housing. For continuous, replace X with C
- WX/WC stands for white housing. For black housing, change W with B. For example BX/BC
- Replace 57 with 40 for 4000 CCT



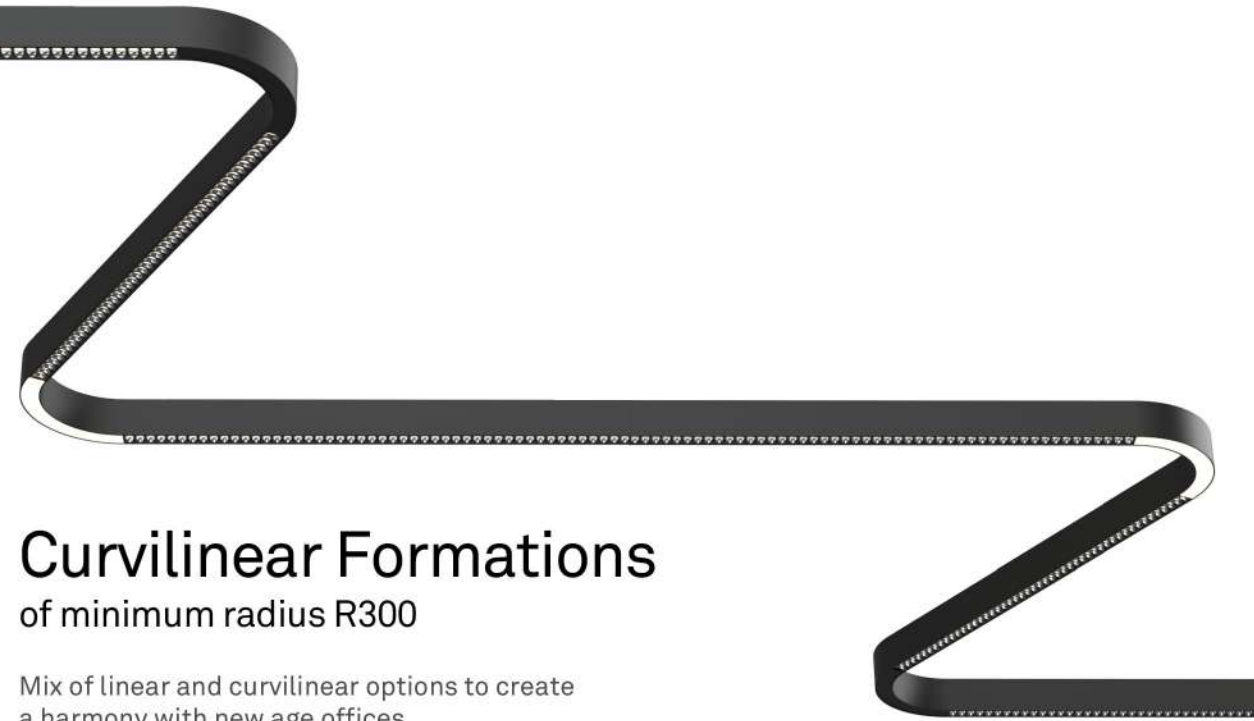


## Curvilinear Formations of minimum radius R300

Mix of linear and curvilinear options to create  
a harmony with new age offices




Diffuser




Blanker



## Quick CT Installation

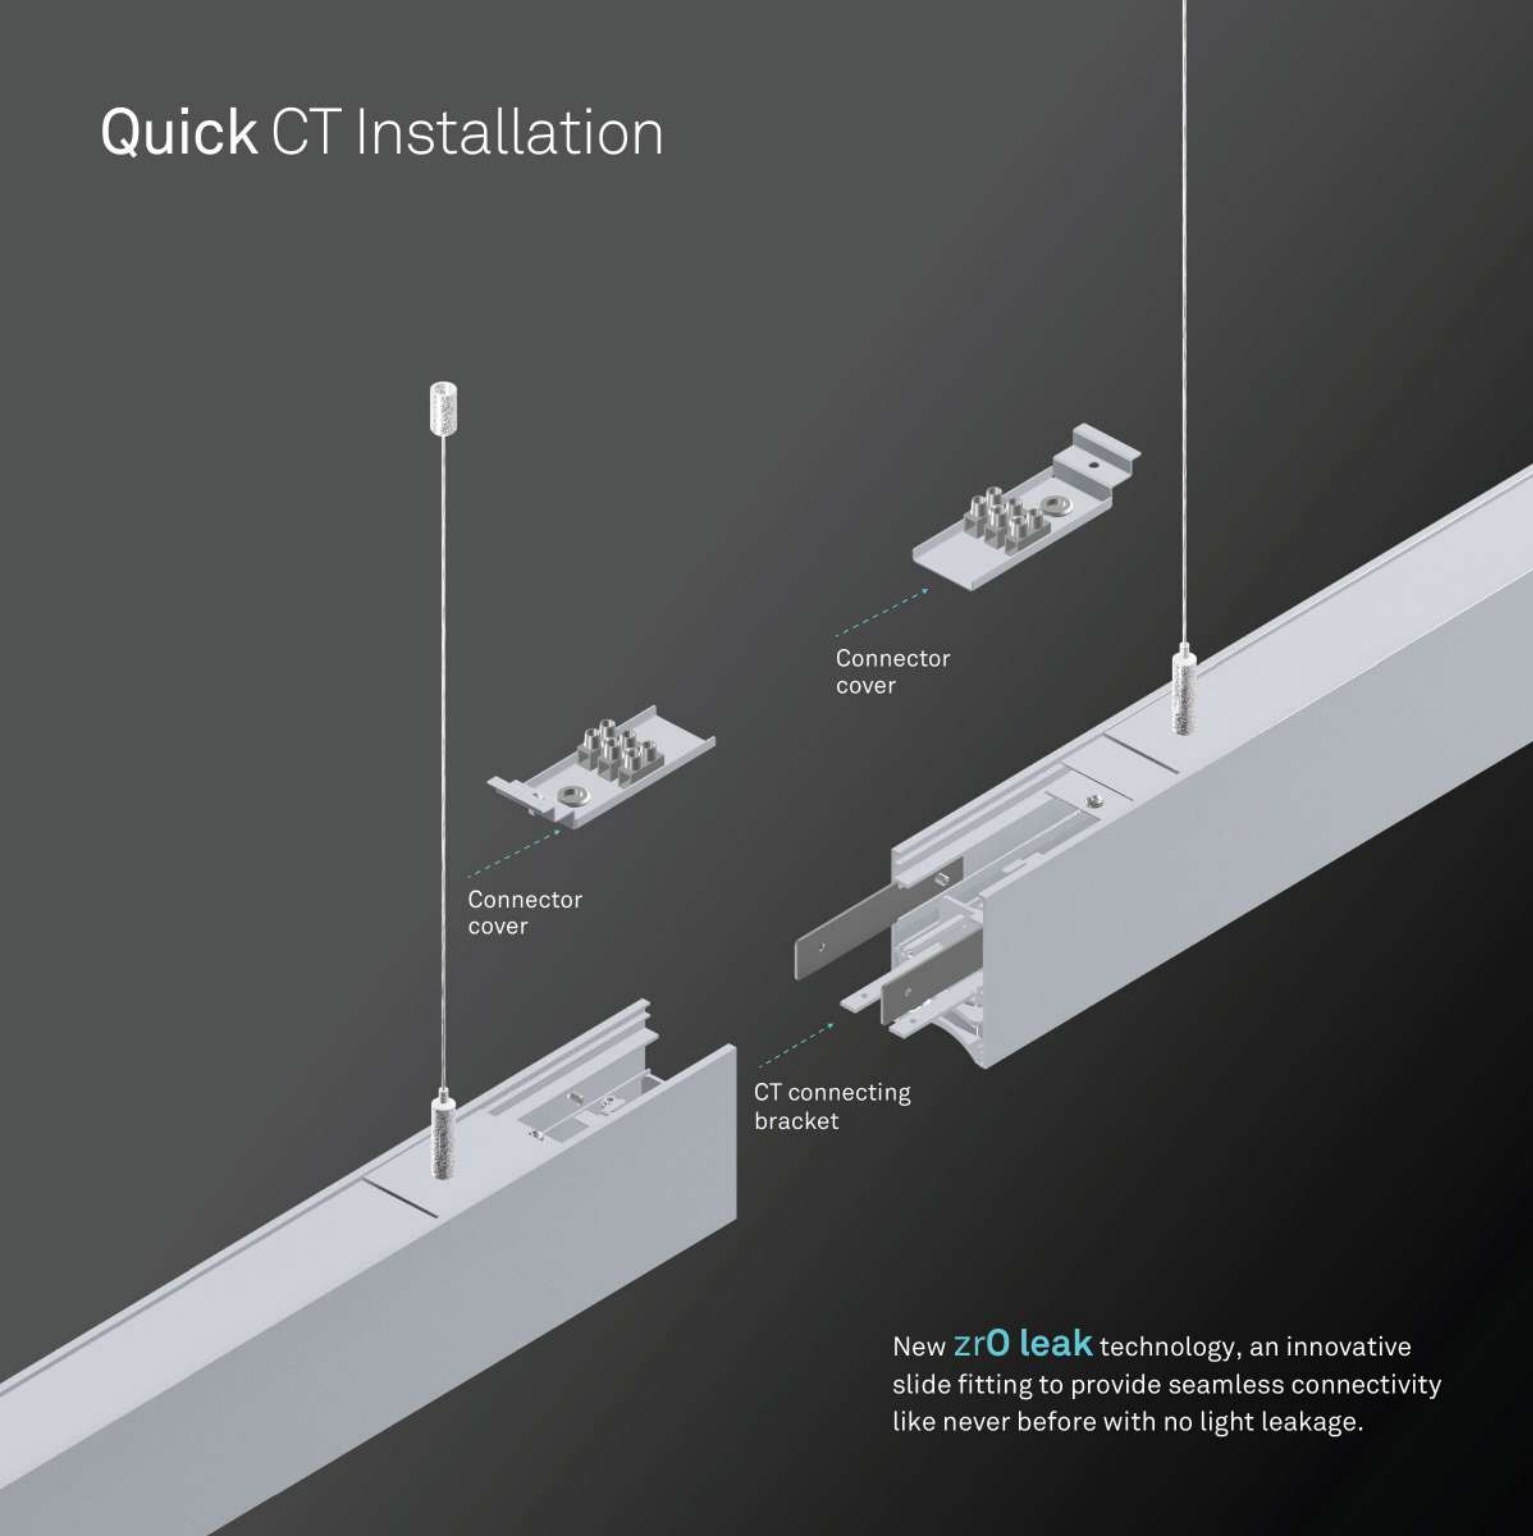

## Easy installation and maintenance from the top

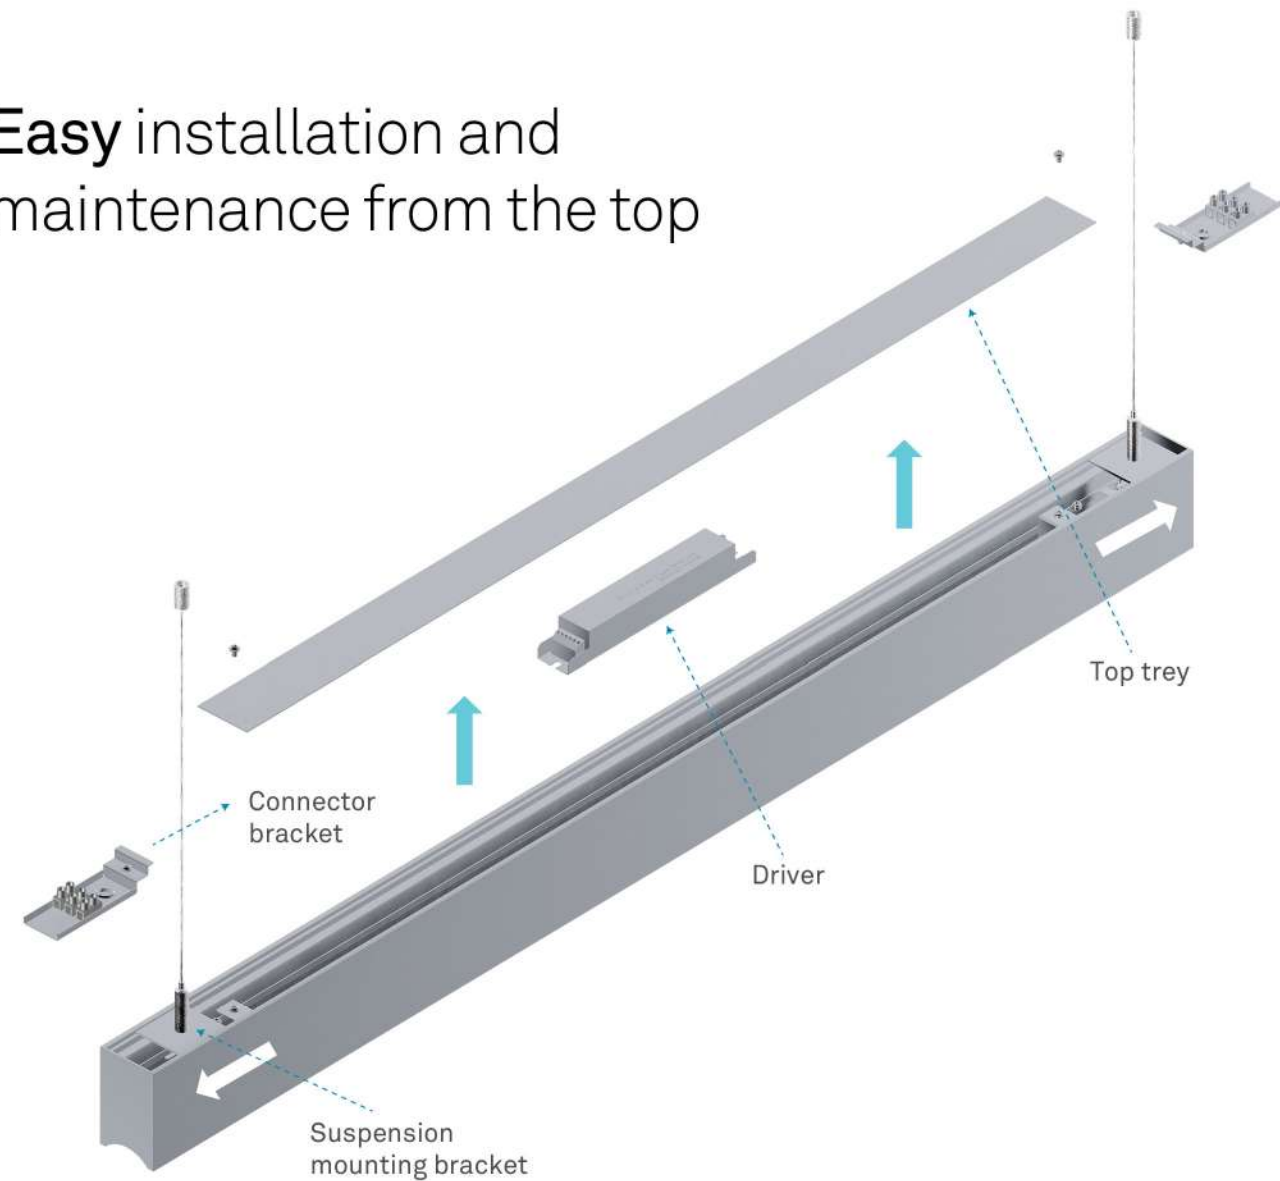

- Suspension to be ordered separately
- LMX222: 1.5 mtr. suspension suitable for installation on RCC ceiling
- Anchor fasteners LMX224 and LMX225 to be ordered separately along with LMX222 for 24mm and 15mm 'T' Grid ceilings respectively

# Technical Specifications

- Aesthetically slim designed profile in two sizes 43mm and 53mm
- Extruded Aluminium housing and die casted endcap duly powder coated, with white and black colour as options
- Driver is pre-wired up to terminal block on the housing
- Provision for loop in - loop out for ease of wiring
- Designed and manufactured to comply with IS 10322 part 5/Sec 1 2012




## Product Dimensions

### 2/4ft length with 2 suspensions



### 8ft length with 3 suspensions

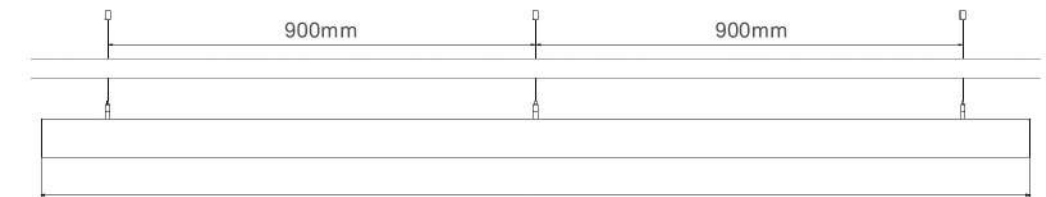

\*All dimensions are in mm, tolerance +/- 2 mm



# Explore the broad range of Wipro Seating Solutions

## Office Seating



Adapt



Aerosit



Absolute



Immerse

## Collaborative Seating



Single-Seater



Round Pouffe



Three-Seater



Low Table

## Multi-Purpose Chairs



Transit



Munch



Symphony



Ballet

## Auditorium Chairs

## Public Seating



Flexico-Moderno



Flexico-Comforto



# Discover the wide range of Wipro Lighting Solutions

## Industrial Lighting



Xpressbay Pro

## MWS Lighting



NuMoon



Skymesh



Fokus+



Aqua



Inform



Inspiro



Biophilia



Skyscale



Mute

## Outdoor Lighting



Arcus Prime



Dot



Crest Bollard

Please follow the link: [www.wiprolighting.com](http://www.wiprolighting.com)

