




FOKUS+

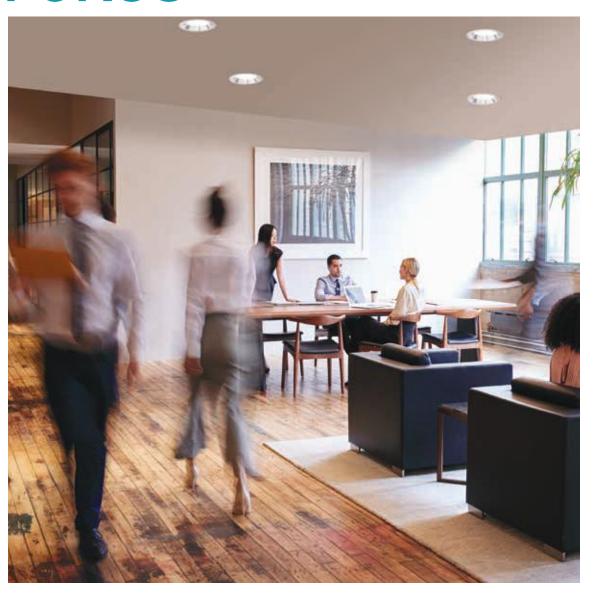


Downlights that up the vibe of workspaces

MAKING MODERN WORKSPACES COME ALIVE

We live in hybrid times where workspaces are now embracing the comfort of homes. To thrive in these ever-evolving times,
Wipro Lighting provides office lighting solutions that conform to global design standards and aesthetics.
We ensure that our dynamic solutions are focused on optimum safety, visual comfort, productivity, wellbeing, energy and cost efficiency.



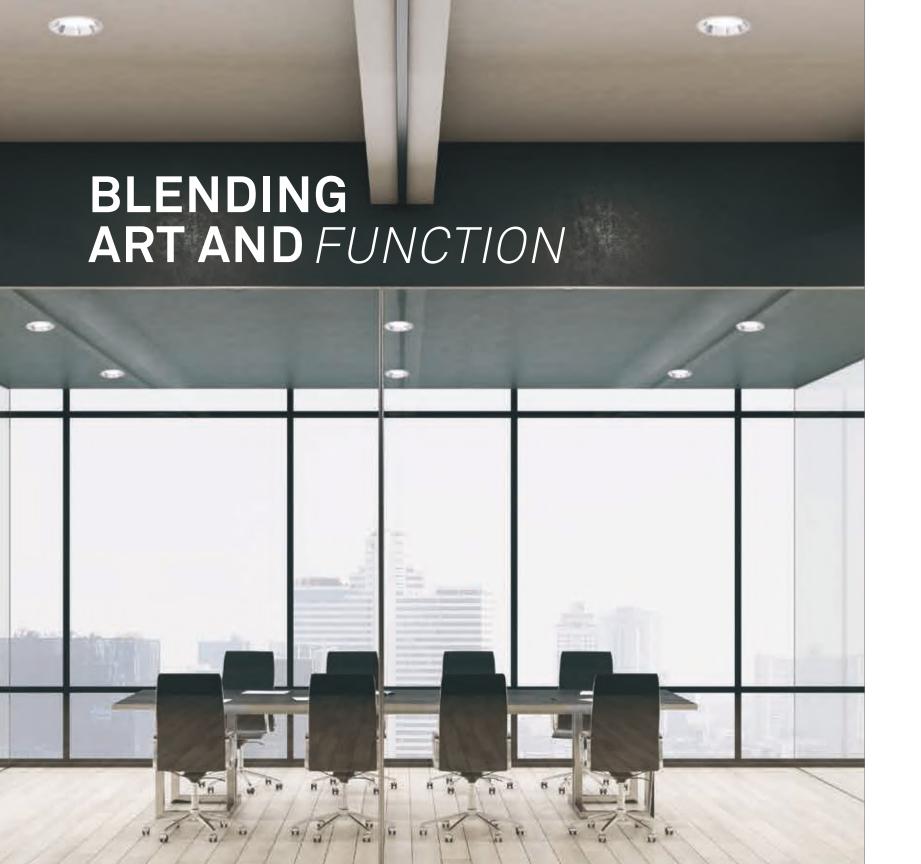

A RICH SYMPHONY OF ELEGANCE AND EFFICIENCY



Well-designed rimless downlights with a wide range of combinations in optics and diffuser rings, to light up your workspaces. The entire range is specially conceptualized to enhance the look of office spaces while improving productivity at work. It's glare-free lighting solutions ensure sharp light for concentration, and a soft glow for optimum experience. With our latest Fokus⁺ lighting solutions, we are on an odyssey to create inspiring designs, engineered to the highest standards of quality and style quotient.

FOKUS ON PERFORMANCE PLUS COMFORT

VISUAL COMFORT

- Better UGR
- Deep inset optics and collimator reflectors

SLEEK AND STYLISH

- Minimalistic look with minimum mounting clips
- Clean rimless look

EASY INSTALLATION

- Leaf clamping
- Minimal clips

OWNERSHIP Durable

- Lower maintenance and operating costs

LOWER COST OF

EFFICIENT THERMAL MANAGEMENT

• Magwheel inspired heatsink design

MULTIPLE LIGHT OPTIONS

- Trim: With/Without
- Optics: White/Chrome
- Rings: Diffuser/Collimator
- Shape: Round/Square

A LIGHT FOR EVERY LOOK

DOWNLIGHTER (ROUND)

Beam angle: 24°, 38°, 60°

Sizes: 62 Ø
Wattages: 9W, 12W
Beam angle: 20°, 40°, 60°





Sizes: 83 Ø
Wattages: 15W, 18W
Beam angle: 25°, 38°, 60°





Sizes: 185 Ø 24W

Downlighter with Collimator Ring

Sizes: 185 Ø
Wattages: 24W
Beam angle: 24°, 38°, 50°



TRIMLESS



Sizes: 65 Ø
Wattages: 9W, 12W
Beam angle: 20°, 40°, 60°



Sizes: 83 Ø
Wattages: 15W, 18W
Beam angle: 25°, 38°, 60°



Sizes: 103 Ø
Wattages: 24W, 30W
Beam angle: 24°, 38°, 60°

FOKUS (SQUARE)



Fokus

Sizes: 92 x 92 x 56
Wattages: 12W, 15W, 18W, 20W
Cutout: 85 x 85



Fokus Surface

Sizes: 87 x 87x 181
Wattages: 12W, 15W, 18W, 20W



Fokus Trimless

Sizes: 91 x 140x 56
Wattages: 12W, 15W, 18W, 20W
Cutout: 88 x 88

SPECIFICATIONS

- White powder coated, pressure die cast aluminum housing, for better heat management and rust free.
- Deep inset optics and collimation ring, ensures low glare light distribution.
- HET diffuser for better and diffused light output.
- Option of different beam angles with deep inset white and silver bezel ensure Better Light Transmission.
- Easy to install, sturdy metal mounting clips, suitable for all types of ceiling systems and POP (Thickness 2mm to 19mm).
- Driver (IP20) is pre-wired up to terminal block with plug in connectors for long service life.
- High efficacy LEDs for uniform and optimum light output, ideal for Green Lighting Solution.
- Automobile inspired heat sink for better thermal management.
- Product looks aesthetically neat and clean as no visible hardware on external surface.
- IS 10322 part 5/Sec 22012 compliant, for general purpose lighting, IP20 protection against entry of insects and small particles into luminaire for safety.

ELECTRICAL DATA - FOKUS+(ROUND)

| Product Name | Catalogue Reference No. | Wattage (W) | ССТ | Rated Voltage (V) | Main Current (A) | Cutout (+/- 1mm) | Case Lot | Approx Weight (KG) | | | |
|--|--|--|------|-------------------|------------------|------------------|----------|--------------------|--|--|--|
| Fokus* Round | LD07-111-040-57-CH | 9 | 5700 | 240 | 0.004 | 58 | 20 | 0.2 | | | |
| | LD07-111-040-57-WH | 9 | 5700 | 240 | 0.004 | 58 | 20 | 0.2 | | | |
| | Also available in 4000K CCT and 600 beam angle | | | | | | | | | | |
| | LD07-131-040-57-CH | 12 | 5700 | 240 | 0.05 | 58 | 20 | 0.2 | | | |
| | LD07-131-040-57-WH | 12 | 5700 | 240 | 0.05 | 58 | 20 | 0.2 | | | |
| | Also available in 4000K CCT and 600 beam angle | | | | | | | | | | |
| | LD07-161-038-57-CH | 15 | 5700 | 240 | 0.06 | 78 | 16 | 0.4 | | | |
| | LD07-161-038-57-WH | 15 | 5700 | 240 | 0.06 | 78 | 16 | 0.4 | | | |
| | Also available in 4000K CCT and 600 beam angle | | | | | | | | | | |
| | LD07-211-038-57-CH | 18 | 5700 | 240 | 0.08 | 78 | 16 | 0.4 | | | |
| | LD07-211-038-57-WH | 18 | 5700 | 240 | 0.08 | 78 | 16 | 0.4 | | | |
| | Also available in 4000K CCT and 600 beam angle | | | | | | | | | | |
| | LD07-311-026-57-CH | 24 | 5700 | 240 | 0.1 | 98 | 12 | 0.6 | | | |
| | LD07-311-026-57-WH | 24 | 5700 | 240 | 0.1 | 98 | 12 | 0.6 | | | |
| | Also available in 4000K CC | Also available in 4000K CCT and 450 beam angle | | | | | | | | | |
| | LD07-381-026-57-CH | 30 | 5700 | 240 | 0.13 | 98 | 12 | 0.6 | | | |
| | LD07-381-026-57-WH | 30 | 5700 | 240 | 0.13 | 98 | 12 | 0.6 | | | |
| | Also available in 4000K CCT and 450 beam angle | | | | | | | | | | |
| Fokus ⁺ Collimator Ring | LD07-221-038-57-XX | 15 | 5700 | 240 | 0.06 | 179 | 10 | 0.7 | | | |
| | Also available in 4000K CCT and 500 beam angle | | | | | | | | | | |
| Fokus ⁺ Diffused Ring | LD07-181-XXX-57-XX | 189 | 5700 | 240 | 0.08 | 179 | 10 | 0.7 | | | |
| | Note: Also available in 400 | Note: Also available in 4000K CCT | | | | | | | | | |
| Fokus ⁺ With Collimator Ring | LD07-331-038-57-CH | 24 | 5700 | 240 | 0.1 | 179 | 10 | 1.2 | | | |
| | LD07-331-038-57-WH | 24 | 5700 | 240 | 0.1 | 179 | 10 | 1.2 | | | |
| | Note: Also available in 400 | Note: Also available in 4000K CCT | | | | | | | | | |
| Fokus ⁺ With Diffused Ring | LD07-321-026-57-CH | 24 | 5700 | 240 | 0.1 | 179 | 10 | 1.2 | | | |
| | LD07-321-026-57-WH | 24 | 5700 | 240 | 0.1 | 179 | 10 | 1.2 | | | |
| | Note: Also available in 4000K CCT | | | | | | | | | | |

ELECTRICAL DATA - FOKUS (SQUARE)

| Product Name | Catalogue Reference No. | Wattage (W) | ССТ | Rated Voltage (V) | Main Current (A) | Cutout (+/- 1mm) | Case Lot | Approx Weight (KG) |
|-----------------------------------|-----------------------------|--------------------|---------|-------------------|------------------|------------------|----------|--------------------|
| Fokus Square | LD34-151-XXX-57-XX | 12 | 5700 | 240 | 0.05 | 85 x85 | 16 | 0.65 |
| | LD34-171-XXX-57-XX | 15 | 5700 | 240 | 0.06 | 85 x85 | 16 | 0.65 |
| | LD34-221-XXX-57-XX | 18 | 5700 | 240 | 0.07 | 85 x85 | 16 | 0.65 |
| | LD34-251-XXX-57-XX | 20 | 5700 | 240 | 0.08 | 85 x85 | 16 | 0.65 |
| Fokus Square Trimless | LD34-151-XXX-57-TL | 12 | 5700 | 240 | 0.05 | 88X88 | 16 | 0.75 |
| | LD34-171-XXX-57-TL | 15 | 5700 | 240 | 0.06 | 88X88 | 16 | 0.75 |
| | LD34-221-XXX-57-TL | 18 | 5700 | 240 | 0.07 | 88X88 | 16 | 0.75 |
| | LD34-251-XXX-57-TL | 20 | 5700 | 240 | 0.08 | 88X88 | 16 | 0.75 |
| Fokus Square Surface | LD34-151-XXX-57-SM | 12 | 5700 | 240 | 0.05 | | 12 | 1.05 |
| | LD34-171-XXX-57-SM | 15 | 5700 | 240 | 0.06 | | 12 | 1.05 |
| | LD34-221-XXX-57-SM | 18 | 5700 | 240 | 0.07 | | 12 | 1.05 |
| | LD34-251-XXX-57-SM | 20 | 5700 | 240 | 0.08 | | 12 | 1.05 |
| | All square varaints are als | so available in 40 | OOK CCT | | | | | |
| TL - Trimless, SM - Surface Mount | | | | | | | | |








Registered Office: Wipro Enterprises (P) Ltd. 'Wipro House', No. 8, 7th Main, 80 Feet Road, Koramangala, 1st Block, Bangalore 560034. Karnataka. India.

Business Office: Wipro Lighting, 5th Floor, Godrej Eternia - C, Old Pune-Mumbai Highway, Shivajinagar, Pune 41105. India. (T) 020-66098700, (F) 020-66098777 | helpdesk.lighting@wipro.com





Branches: Ahmedabad | Bangalore | Baroda | Bhubaneshwar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata | Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in parts or in whole without permission is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.