

Key Highlights



Color temperature available
in 4000K and 5700K



50,000 burning hours
@ L70



UGR & HET diffuser




High quality with
long service life



High light output



DALI driver
compatible

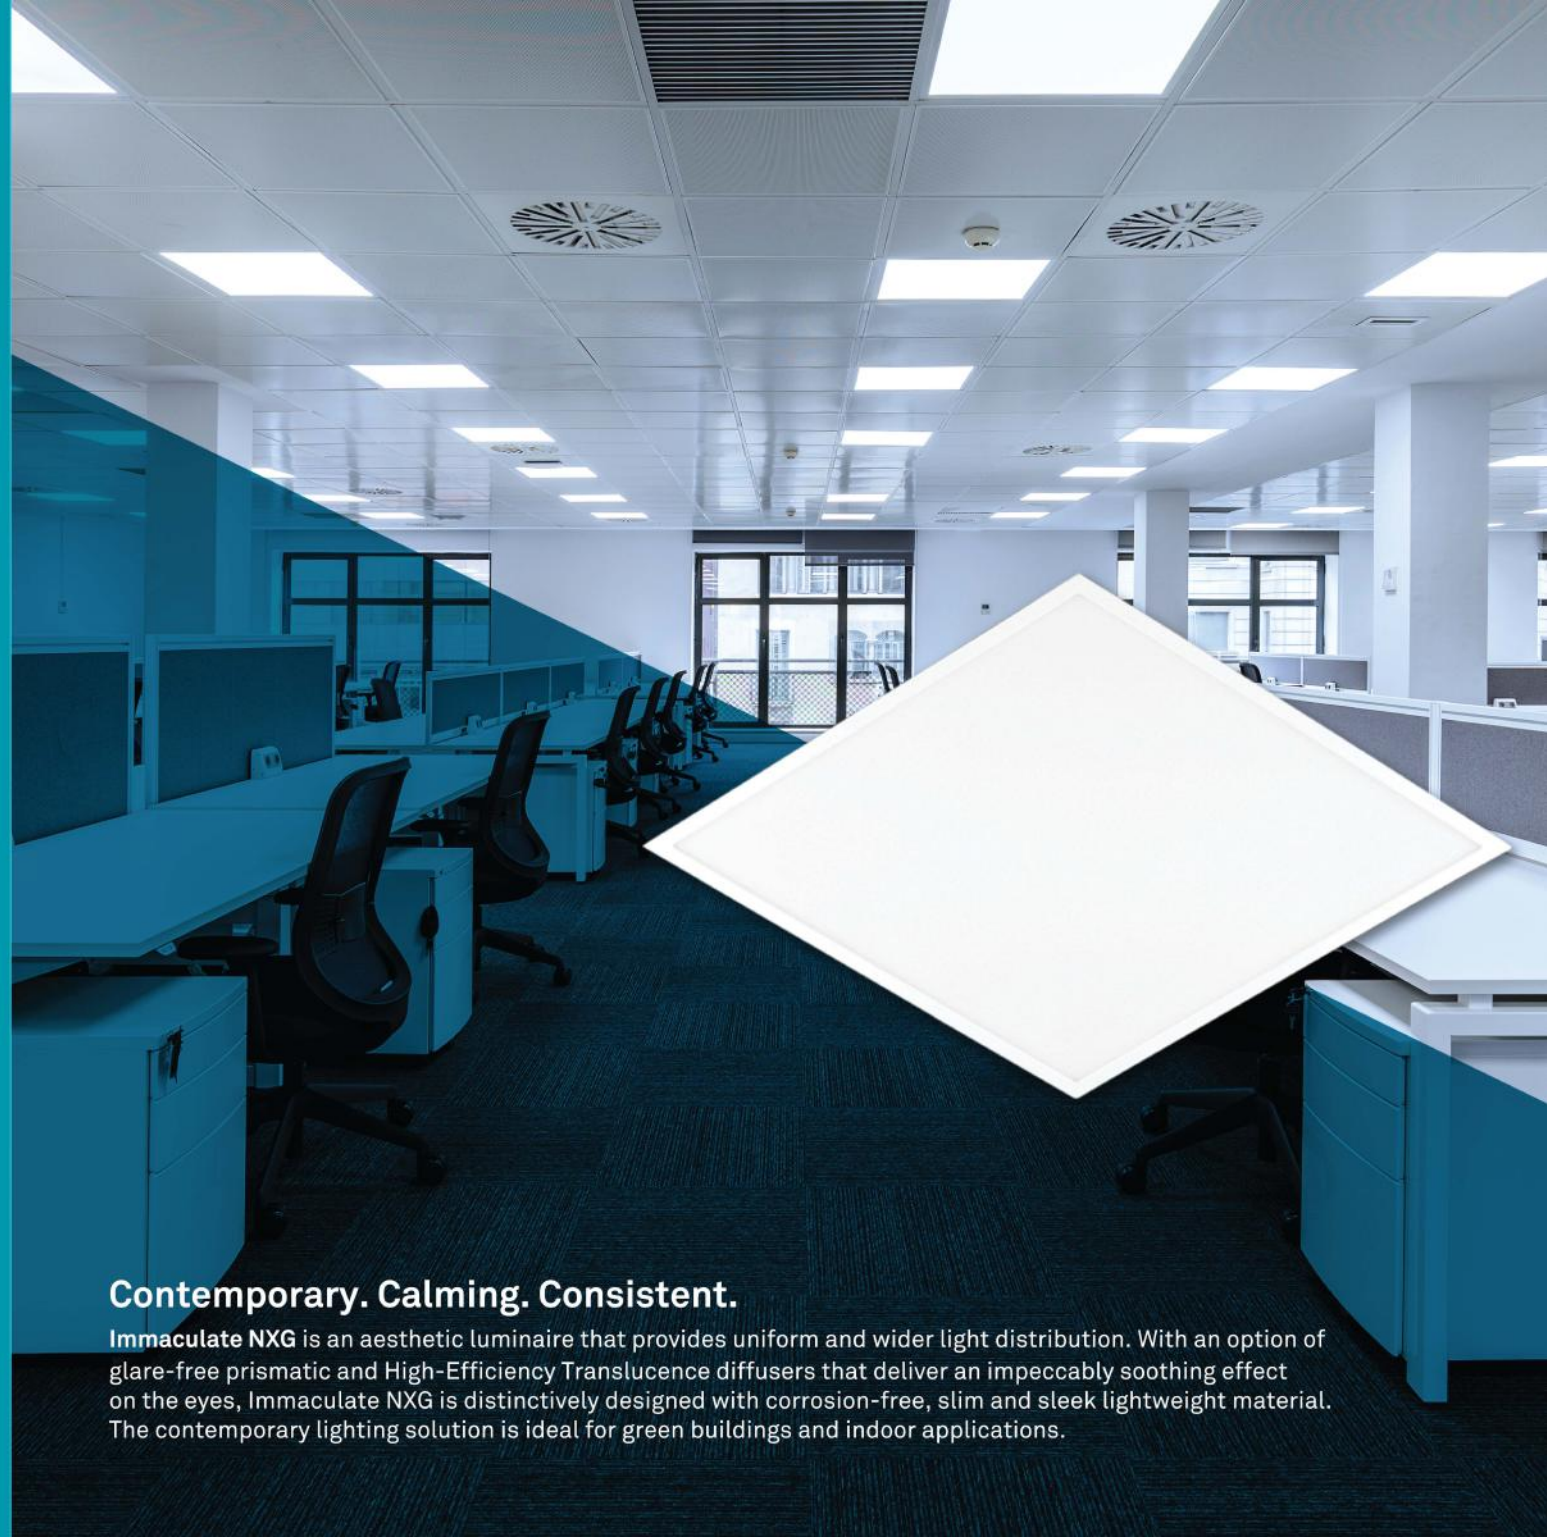

Contemporary. Calming. Consistent.

Immaculate NXG is an aesthetic luminaire that provides uniform and wider light distribution. With an option of glare-free prismatic and High-Efficiency Translucence diffusers that deliver an impeccably soothing effect on the eyes, Immaculate NXG is distinctively designed with corrosion-free, slim and sleek lightweight material. The contemporary lighting solution is ideal for green buildings and indoor applications.

IMMACULATE NXG



A contemporary lighting solution

Enhanced aesthetics

Slim and sleek profile with no visible hardware on external surface

Effective light distribution

High-efficacy LEDs with High-Efficiency Translucence (HET) diffuser and UGR<19 diffuser as an option for optimum glare-free output

Hassle-free maintenance

Easy installation and long service life with an externally connected driver

Superior performance

Lightweight and corrosion-free housing made of CRCA & frame in aluminium duly powder coated in white, suitable for modern interiors



IP 20

IMMACULATE NXG

The ideal luminaire for
modern workspace environment

APPLICATION AREAS



Modern workspaces



Educational institutes



Healthcare




BFSI spaces

ELECTRICAL DATA

Cat. No.*	Power (W) +/- 10%	Rated Voltage (VAC)	*Mains Current (A)	Case Lot (Nos.)	Approx. Unit Weight (kg)
CRCO10R024HP57G3	24	240	0.10	6	1.4
CRCO10R030HP57G3	30	240	0.13	6	1.4
CRCO10R036HP57G3	36	240	0.16	6	1.4
CRCO10R040HP57G3	40	240	0.17	6	1.4

- For HE variants, replace HP with HE
- For DALI driver variants, add DA before G3
- Replace G3 with G4 for higher warranty
- Replace 57 with 40 for 4000K CCT

- For UGR variants, add UG before G3
- For DALI driver variants in UGR, add DUG before G3
- For surface mounting, order surface frame CRCO-2X2-SM-FRAME separately
- *Rated current will have tolerance as per IS 16104: 2012

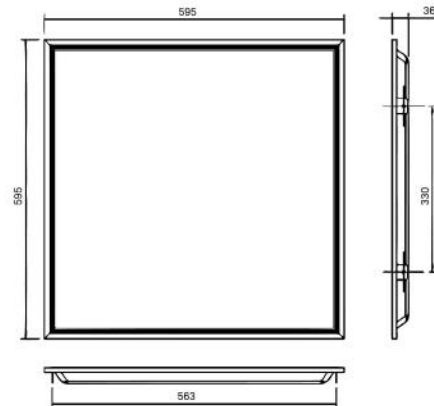

All dimensions are in mm, Tolerance +/- 2 mm

www.wiprolighting.com | Toll free no: 1800 425 1969 | helpdesk.lighting@wipro.com



Registered Office: Wipro Enterprises (P) Ltd.
'Wipro House', No. 8, 7th Main, 80 Feet Road,
Koramangala, 1st Block, Bangalore 560034

Business Office: Wipro Lighting, 5th Floor, Godrej Eternia-C,
Old Pune-Mumbai Highway, Shivajinagar, Pune 411005
(T) 020 66098700, (F) 020 66098777



Branches: Ahmedabad | Bangalore | Bhubaneswar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata
Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam

Innovation and improvement are a way of life at Wipro. All rights reserved. Reproduction of this data in parts or in whole, without permission, is prohibited. Care has been taken to ensure that the information content within is correct. We reserve the right to modify the product without prior intimation. Imitation of Registered Designs is a punishable offence.

Follow us on

