

LP07

LED Post Top Luminaire




Specifications:

- Aluminum housing in Pure Polyester UV resistant powder coated black finish.
- Top maintainable product with top opening die cast cover
- Anti-corrosive stainless steel screws & silicon gasket
- HET PMMA diffuser
- Driver duly wired up to terminal block.
- Conforms to IS 10322 Part 5 / Sec 1 : 1987

Installation:

- Luminaire is suitable for pole diameter up to 75 mm (Pole is not in Wipro's scope)
- Cable entry through pole from bottom.
- In- built electronic LED driver.
- 3 way 10Amps GFP mains connector.

Dimensional drawing:

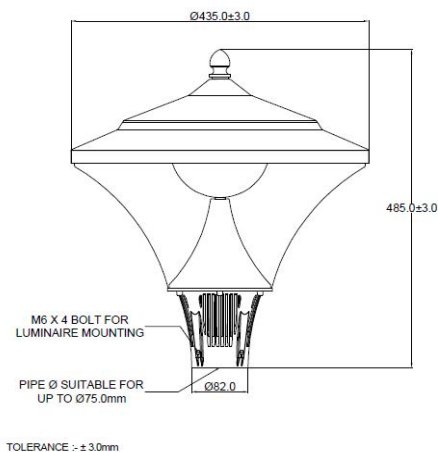

Electrical data:

IP65

Product Code	System Wattage (W)	Rated Voltage (V)	Mains Current (A)	Case Lot (Nos)
LP07-501-XXX-57-CL	45W	240	0.19	1
LP07-671-XXX-57-CL	60W	240	0.08	1

CL- Product with Clear diffuser

Applications:

- Residential area
- Parks and gardens
- Squares, Plazas