Key Highlights



IP65



50,000 burning hours at L70



80 CRI



Ideal green lighting solution



Symmetric glare-free distribution



Enhance your landscapes with best of the features

High efficacy LEDs provide uniform and optimum light output

Glare-free light distribution with functional symmetry for more light on pathways

Light weight and rust-free luminaire due to pure polyester powder coated aluminum housing

Easy installation for long service life

Pre-wired potted driver and accessories for easy installation

APPLICATION AREAS





ELECTRICAL DATA

Product Code

LB19-111-XXX-57-08

LB19-111-XXX-40-08

LB19-131-XXX-57-08

LB19-131-XXX-40-08



Footpath

System Wattage

(W + / -2)



Patios

Mains Current*

(A)

0.035

0.035

0.043

0.043

Rated Voltage

(VAC)

240

240

240

240

www.wiprolighting.com



Urban and residential streets

Case Lot

(Nos)

4

4



Landscape Lighting

Approx Weight


(kg.)


2.2

2.2

2.2

2.2





helpdesk.lighting@wipro.com

11

11



Registered Office: Wipro Enterprises (P) Ltd. 'Wipro House', No. 8, 7th Main, 80 Feet Road,


Koramangala, 1st Block, Bangalore 560034


Business Office: Wipro Lighting, 5th Floor, Godrej Eternia-C, Old Pune-Mumbai Highway, Shivajinagar, Pune 411005 (T) 020 66098700, (F) 020 66098777




Lucknow | Mumbai | Nagpur | New Delhi | Pune | Raipur | Vishakhapatnam



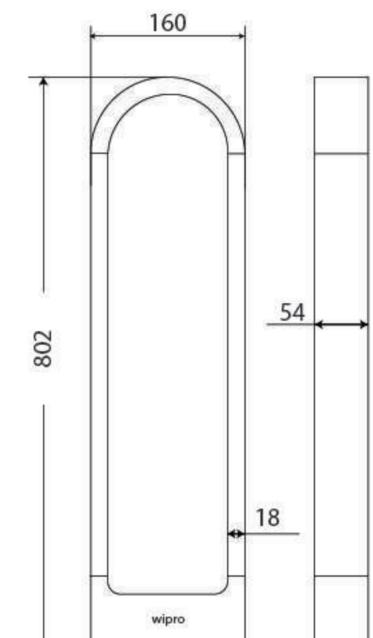

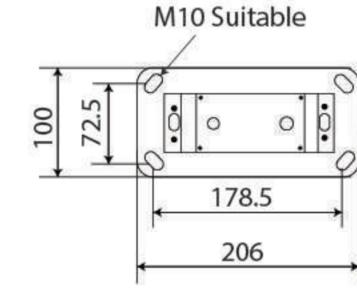

| Toll free no: 1800 425 1969













Bollard

Night-time mystified



^{*}Rated system wattage and and current will have tolerance as per IS 16104: 2012

Branches: Ahmedabad | Bangalore | Bhubaneshwar | Chandigarh | Chennai | Cochin | Coimbatore | Hyderabad | Indore | Jaipur | Kolkata